NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/117C
27 September 1996
SUPERSEDING
MIL-L-11484/117B
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, NATIONAL INTELLIGENCE MEDAL OF ACHIEVEMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

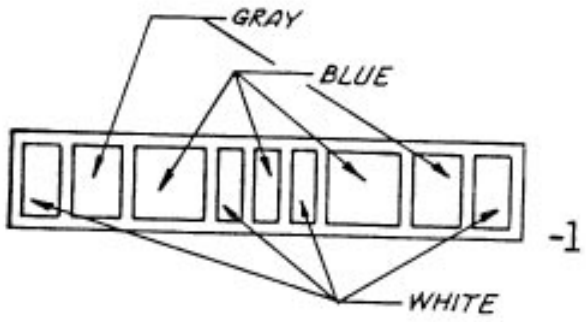

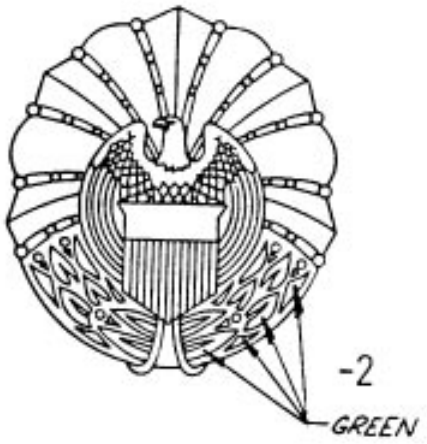

DASH NO.
-1: Bar

MATERIAL: Gilding Metal

FINISH:
-1: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
-2: Gold Plated, Rose Gold Plated, Relieved, Polished Highlights

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DASH No. -1 (Bar):

HEIGHT (Overall):	9/64 inch (0.36 cm) (REF)
WIDTH (Overall):	21/32 inch (1.67 cm) (REF)
THICKNESS:	0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

DASH No. -2 (Emblem):

HEIGHT (Overall):	5/8 inch (1.59 cm) (REF)
WIDTH (Overall):	9/16 inch (1.43 cm) (REF)
THICKNESS:	0.075 inch ± 0.010 inch (0.191 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The colors shall conform to the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Green	12
Blue	18
Gray	27
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Dash No. -2 shall be lacquered.

5. Attaching device shall be prong with pick and wing type clutch for Dash No. -1 and prong with pick and flat ball type clutch for Dash No. -2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:47Z
Check the source to verify that this is the current version before use.