NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/120D
27 September 1996
SUPERSEDING
MIL-L-11484/120C
14 January 1994

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, VICE PRESIDENTIAL SERVICE IDENTIFICATION BADGE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

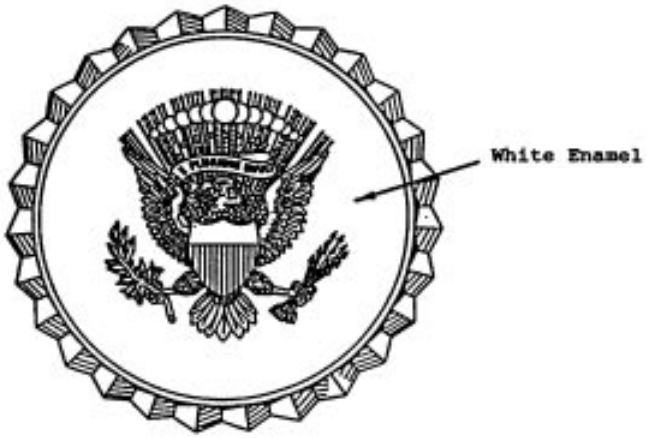

MATERIAL:
BASE: Gilding Metal
DEVICE: Red Brass or Gilding Metal

FINISH:
BASE: Hard Enameled, Gold Plated, Matte Finish, Peaks of Rays Polished and shall match TIOH Metal Finish Chip Number 8.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:
BASE:
DIAMETER (Outside): 9/16 inch (1.43 cm) (REF)
THICKNESS (At Edge): 0.070 inch + 0.005 inch - 0 (0.178 cm + 0.012 cm - 0)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:49Z
Check the source to verify that this is the current version before use.

DEVICE:
HEIGHT (Overall): 11/32 inch (0.87 cm) (REF)
WIDTH (Overall): 5/16 inch (0.79 cm) (REF)
THICKNESS (Overall): 0.030 inch + 0.005 inch - 0 (0.076 cm + 0.012 cm - 0)

ASSEMBLED THICKNESS (At Thickest Part): 0.100 inch + 0.010 inch - 0 (0.254 cm + 0.025 cm - 0)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled area shall be white as indicated. The color shall conform to the TIOH color chip number 28 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The device shall be secured to the base by two rivets or soft soldered. When rivets are used, they may be an integral part of the device or fabricated from any type brass and soldered to the reverse of the device.

5. Attaching device shall be prong with pick and flat ball clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

6. The full size identification badge shall conform to MIL-B-41809/16.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0858)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:49Z
Check the source to verify that this is the current version before use.