MIL-L-11484 / 125A
27 June 1988
SUPERSEDING
MIL-L-11484 / 125
3 July 1979

MILITARY SPECIFICATION SHEET

LAPEL BUTTON, EMPLOYER SUPPORT OF THE GUARD AND RESERVE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-L-11484.

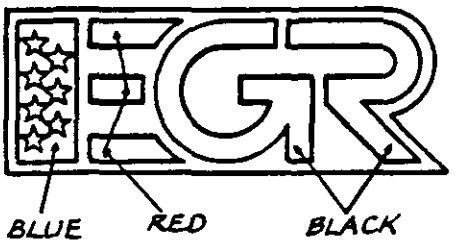

MATERIAL: GILDING METAL

DIMENSIONS (INCHES):
HEIGHT (OVERALL): 1/4 (REF)
WIDTH (OVERALL): 3/4 (REF)
THICKNESS (EDGE): .065 ± .005

FINISH: ENAMELLED, MIRROR-LIKE POLISHED, NICKEL PLATED, RHODIUM PLATED

NOTES:

1. ATTACHING DEVICE SHALL BE PRONG AND FLAT BALL TYPE CLUTCH OR PIN AND CATCH, AS SPECIFIED.
2. WHEN A PRONG AND CLUTCH TYPE ATTACHING DEVICE IS SPECIFIED, THE PRONG SHALL BE SOLDERED OR FUSED, CENTERED ON THE BACK OF THE LAPEL BUTTON.
3. WHEN A PIN AND CATCH TYPE ATTACHING DEVICE IS SPECIFIED, IT SHALL BE SOLDERED OR FUSED TO THE BACK OF THE LAPEL BUTTON. THE PIN SHALL BE 1/2 ± 1/32 INCH LONG AND SHALL BE LOCATED ON THE HORIZONTAL CENTER LINE OF THE BADGE WITH THE HINGE AND CATCH EQUIDISTANT FROM THE OUTER EDGES.
4. THE ENAMELLED AREAS SHALL BE AS INDICATED. THE ENAMEL COLOR SHALL MATCH THE ENAMEL ON THE STANDARD OR APPROVED SAMPLE AND THE TIOH COLOR CHIP LISTED BELOW:

COLOR	CHIP NOS.
RED	1
BLUE	18
BLACK	26

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455 - 0270)

User activities:
Other - OSD

FSC 8455

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:51Z
Check the source to verify that this is the current version before use.