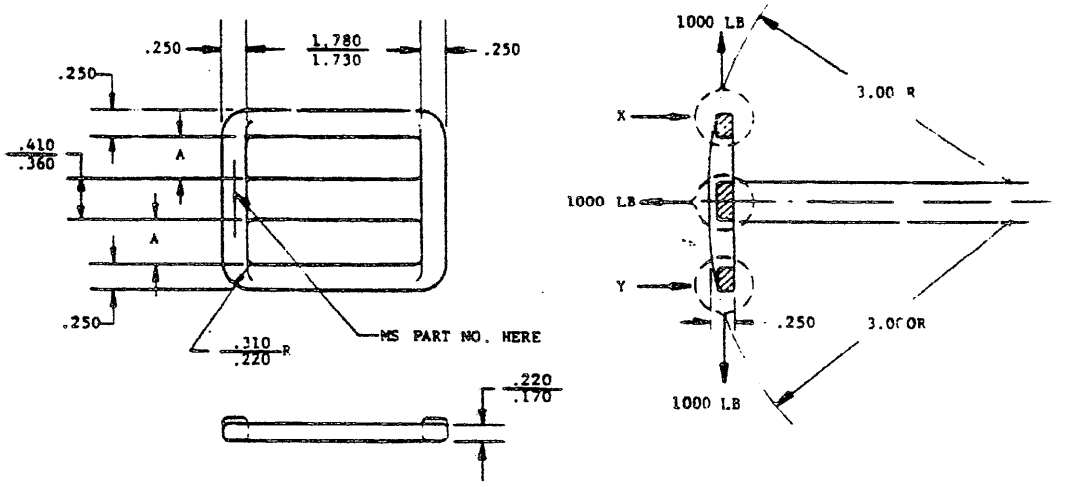


MS PART NO.	A
MS22014-1	.310
MS22014-2	.380
MS22014-3	.440

NOTES:

1. MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049
2. FINISH: CADMIUM PLATE, QQ-P-416, CLASS 1 TYPE 1
3. SURFACE TEXTURE SHALL BE 125 MAX IN ACCORDANCE WITH ANSI B46.1
4. METHOD OF FORMING: HOT FORGE
5. HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN TENSILE STRENGTH IN ACCORDANCE WITH MIL-H-6875
6. UNLESS OTHERWISE SPECIFIED, ALL PERPENDICULAR SURFACES SHALL INTERSECT WITH A .030 - .110 RADIUS.
7. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .030
8. ADAPTER SHALL BE SUBJECTED TO A 1000 LB PROOF LOAD AND A 1000 LB SIDE LOAD AS INDICATED BY ARROWS. ADAPTER TO BE SUPPORTED AT POINTS "X" AND "Y" FOR SIDE LOAD TEST

(A) ENTIRE STANDARD REVISED

APPROVED 28 JUN 54 REVISED (A) 19 AUG 74

P.A. AIR FORCE - 82 Other Cust NAVY - AS ARMY - GL	TITLE ADAPTER, PARACHUTE HARNESS ADJUSTING STRAP	MILITARY STANDARD MS22014
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES USAF 46B7882, NAF 217138	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

The military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repairs or use should be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:44Z
Check the source to verify that this is the current version before use.