FED. SUP CLASS
5935

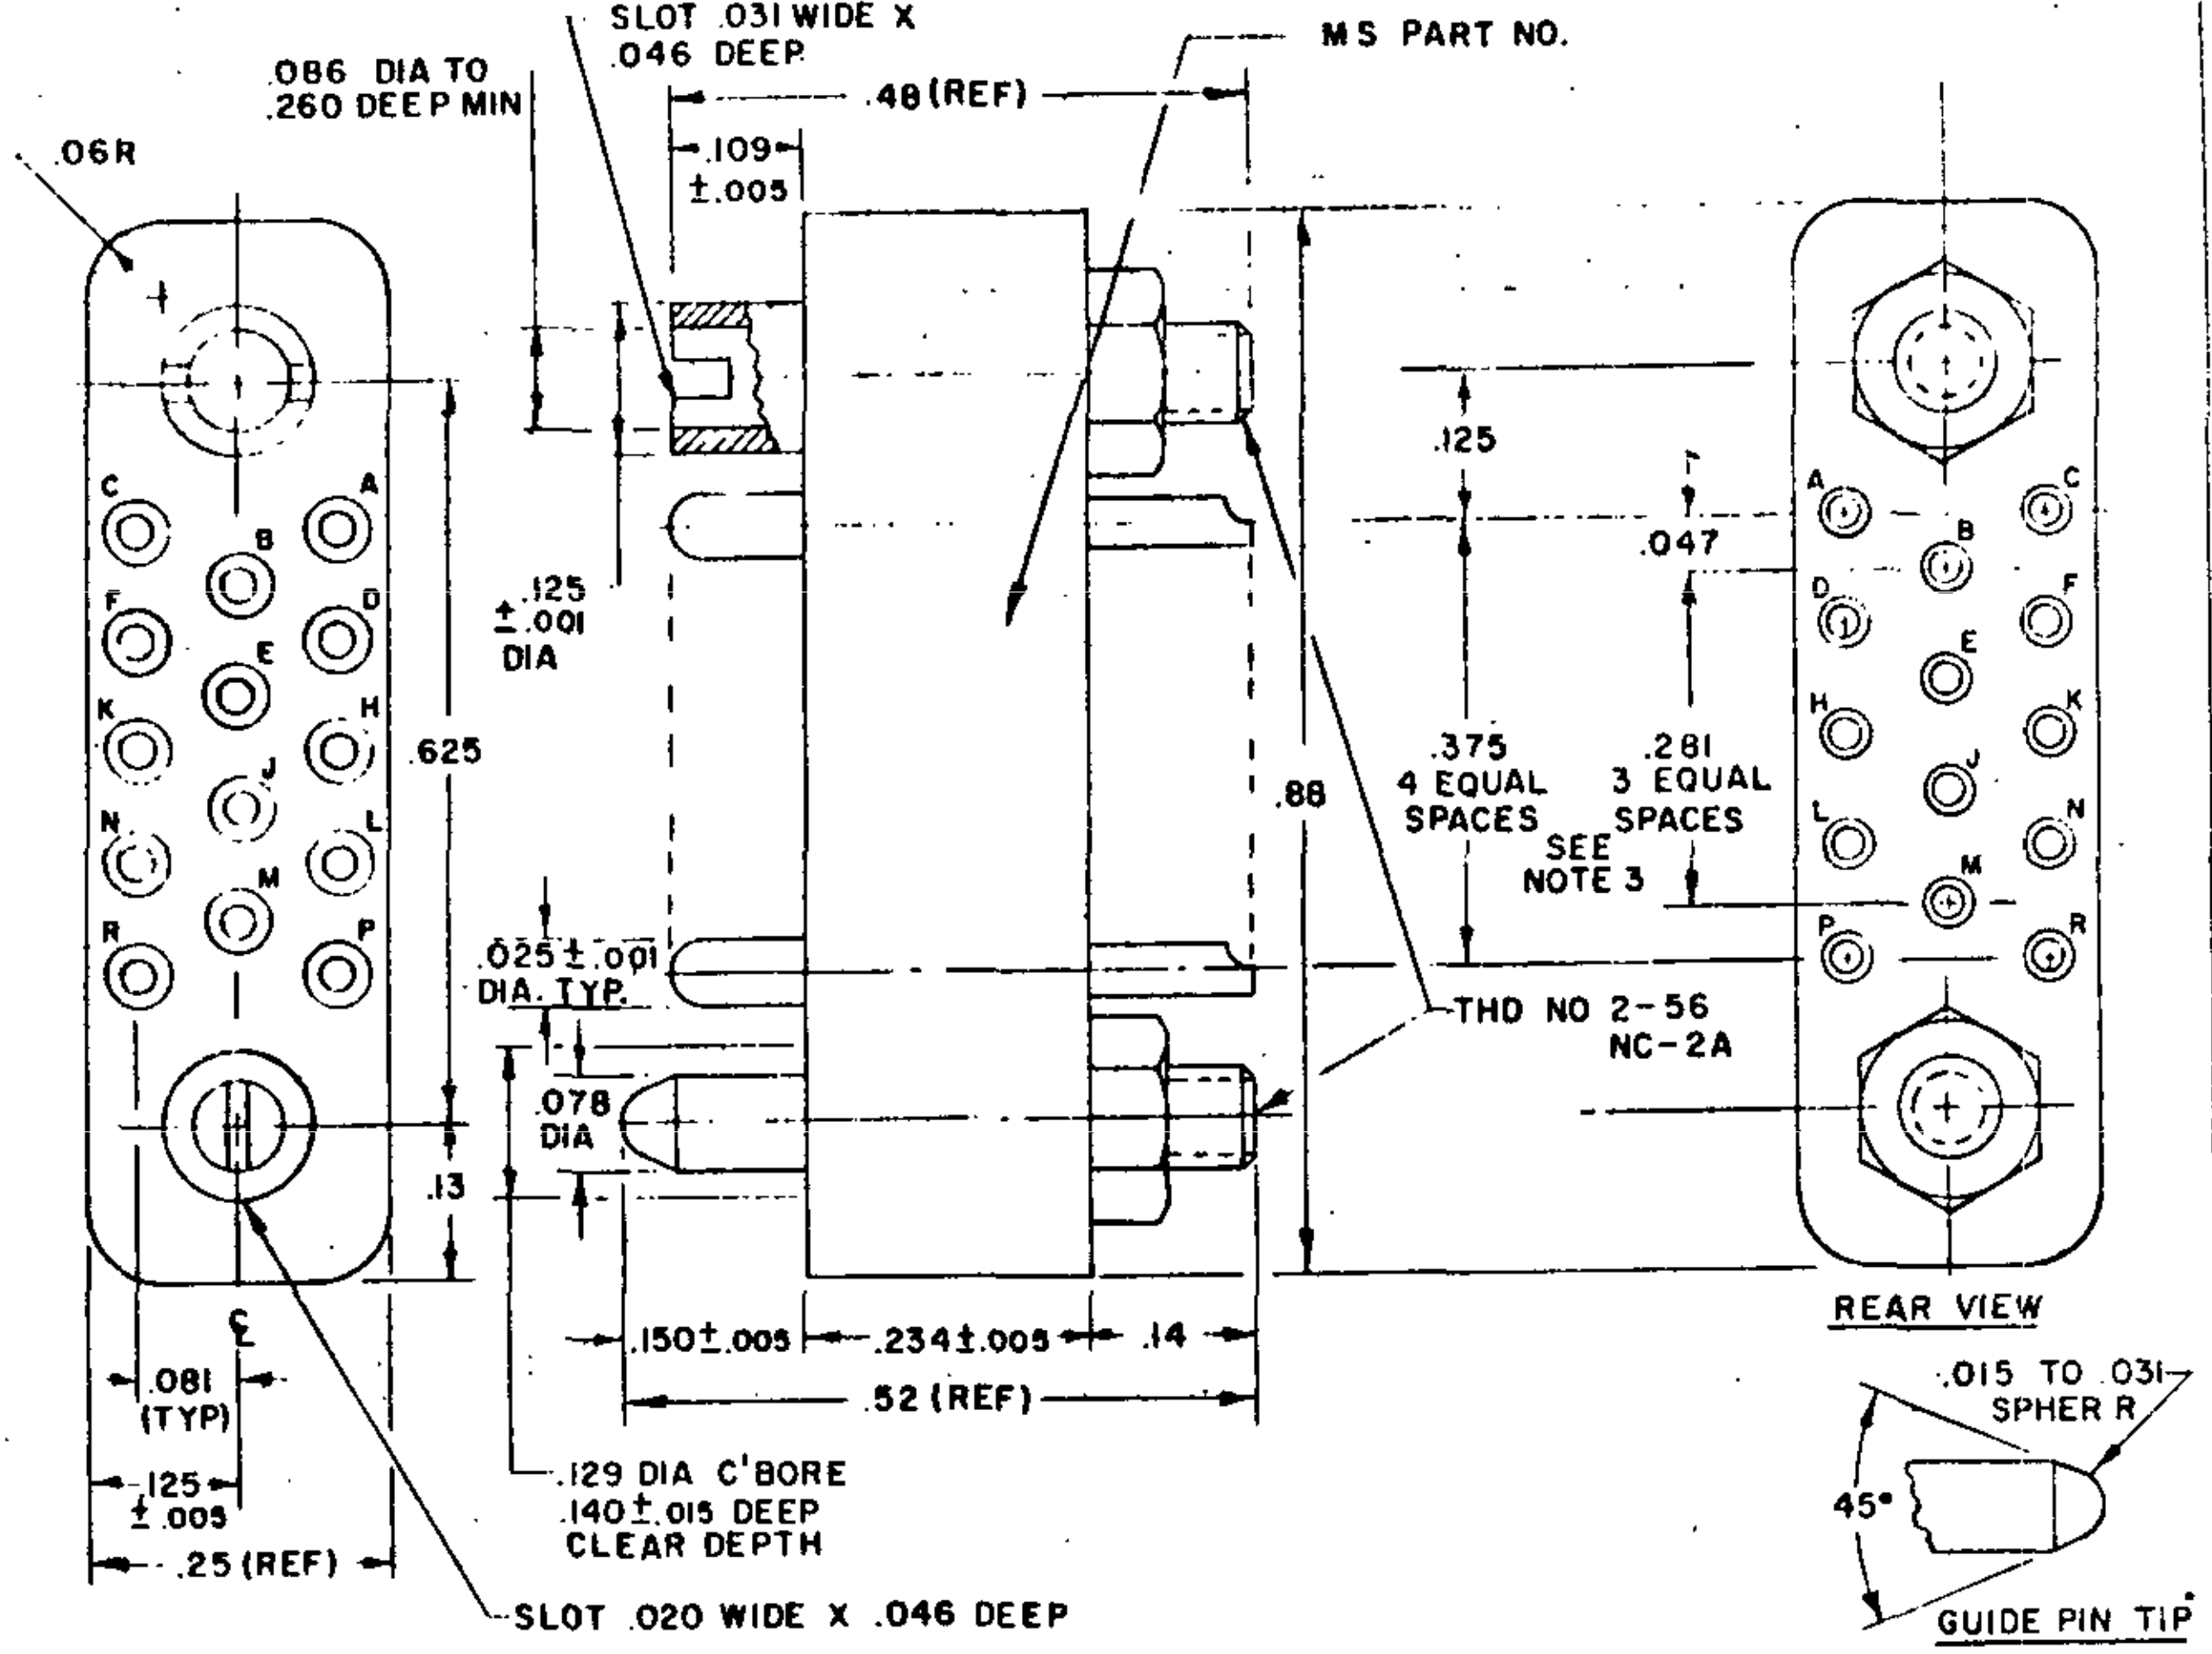

MS PART NUMBER	VOLTAGE RATING AT 60 CPS		TEMPERATURE RATING
	AT SEA LEVEL VOLTS	AT 70,000 FT. VOLTS	C
MS24046-1	Not approved for use		125
MS24046-2	350	90	150
MS24046-3	350	90	200

NOTES:

1. MATING CONNECTOR IS MS24045.
2. FORCE REQUIRED TO INSERT OR WITHDRAW MATING CONNECTOR IS 9 LBS. MAX.
3. MAXIMUM TOLERANCE BETWEEN ANY TWO MOLDED CONTACT CENTERS IS ±.002.
4. APPLICABLE TOP CABLE OPENING IS MS24130-2.
5. ALL DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±.01 OR ±.002, AS APPLICABLE, ON DECIMALS AND ±1/2° ON ANGLES.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS.
7. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
8. AT THE OPTION OF THE MANUFACTURER, A LAND, BOSS, OR PAD OF 0.010 INCH MAXIMUM MAY BE ADDED TO THE MATING FACE OF THE MOLDING FOR PROTECTION OF RAISED LETTERS WHERE USED.

Ⓕ CANCELLED AFTER 15 OCT 1975 USE M28748/7-COOGIA

APPROVED 12 AUG 54 REVISED Ⓐ 4 JUNE 56 Ⓑ 5 MAR 57 Ⓒ 5 DEC 57 Ⓓ 20 JUNE 63 Ⓔ 3 APR 1964 Ⓕ 15 OCT 1975

P.A. AF-85	TITLE		MILITARY STANDARD
Other Cust ARMY-EL NAVY-EC	CONNECTOR, PLUG-RECEPTACLE, ELECTRICAL, RECTANGULAR, 14 CONTACTS, MALE, 3 AMPS.		MS24046
PROCUREMENT SPECIFICATION MIL-C-8384	SUPERSEDES: MS24046 USAF		SHEET 1 OF 1

Reviewer user information is current as of the date of this document. uture coordin [illegible] of changes to this document, draft circulation should be based on the information in the current DODISS [illegible] listing).
AF 11 17 80,11 ARMY [illegible] NAVY [illegible]

This mili [illegible] is appro [illegible] the Department of Defense and is mandatory [illegible] ities. Selection for all new engineering and design application [illegible] epetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:47Z
Check the source to verify that this is the current version before use.