

FSC. SUP CLASS
6610

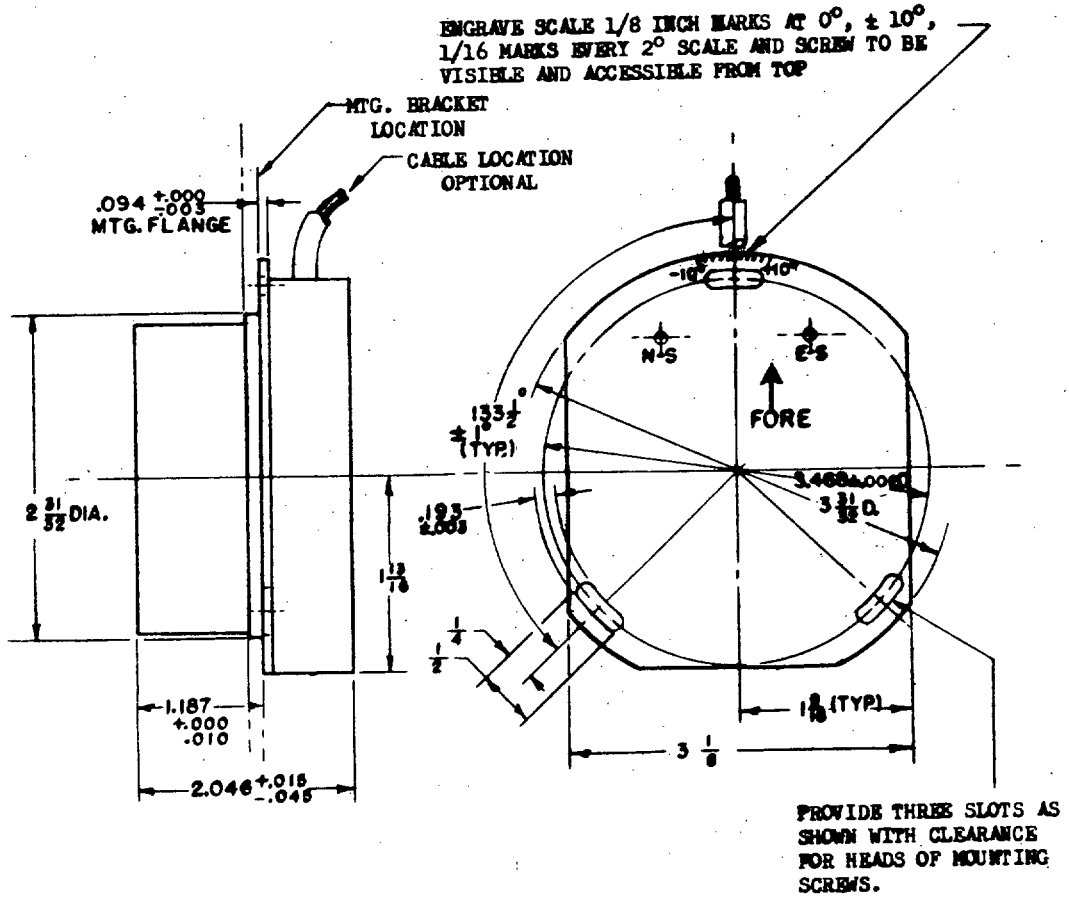

NOTES:

1. COMPASS TO BE MOUNTED LEVEL AT FLIGHT ATTITUDE WITH COMPENSATOR ON TOP.
2. RANGE OF TILT OF COMPASS ELEMENT 27° MINIMUM FROM LEVEL POSITION.
3. TRANSMITTER CABLE WILL BE 4 FEET LONG IN ACCORDANCE WITH MIL-C-27500, JACKET STYLE 1. ©
4. FORWARD DIRECTION MUST BE LABELED PERMANENTLY ON COMPENSATOR AND TRANSMITTER.
5. DIMENSIONS IN INCHES AND TOLERANCES, UNLESS OTHERWISE SPECIFIED: FRACTIONS ± 1/64, DECIMALS ± .003, ANGLES ± 10°
6. COMPENSATOR ADJUSTMENT TO BE ACCESSIBLE FROM TOP AND FROM BOTTOM, (AS DESIGN PERMITS).
7. COMPENSATOR MUST BE SEPARABLE FROM TRANSMITTER.

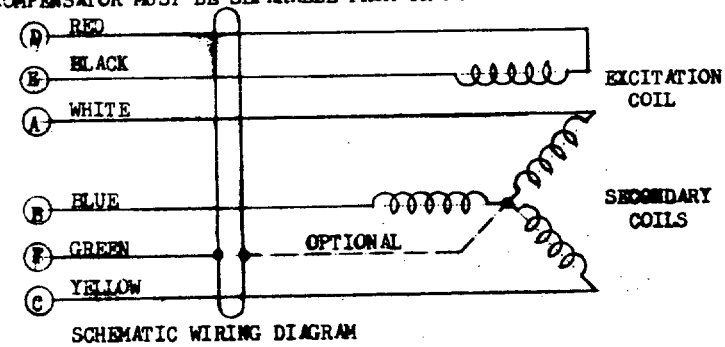

SCHEMATIC WIRING DIAGRAM

© REDRAWN

APPROVED 16 MAY 1959 REVISED © 20 JAN 1963

F.A. Navy- BuWeps Other Cust	TITLE TRANSMITTER, REMOTE COMPASS (THIN WING)	MILITARY STANDARD MS 25396 (WEP)
Procurement Specification MIL-T-19576	SUPERSEDES: BuAero Drawing No. 55A85B1	SHEET 1 OF 1

DD FORM SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons, Department of the Navy, and is mandatory for use by the Navy. All other military activities are required to employ this standard when suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.