FED. SUP CLASS
5935

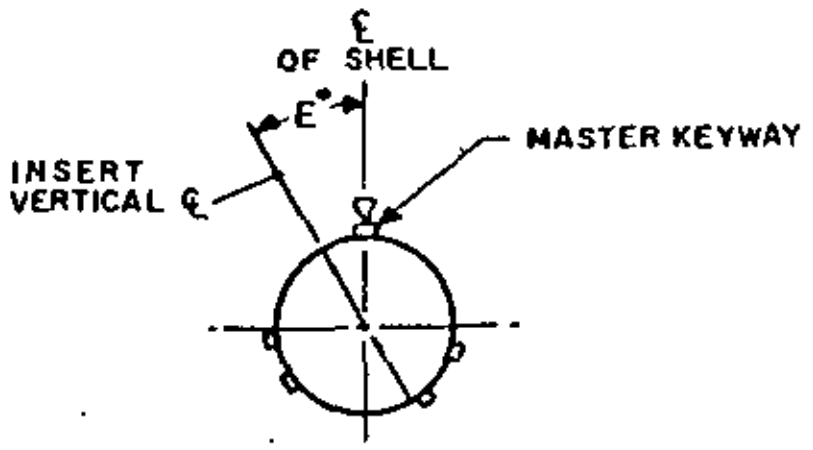

ROTATED INSERT POSITION
(THRU 5 ONLY

MATING FACE VIEW
PIN INSERT (SHOWN)
SOCKET INSERT (OPPOSITE)

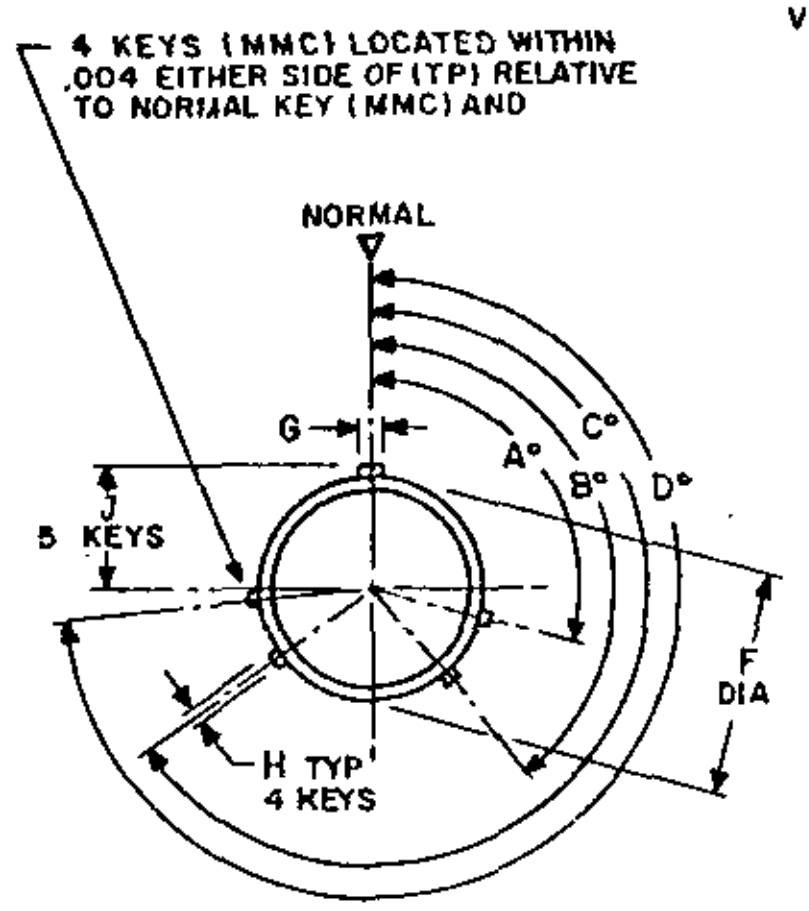
4 KEYS (MMC) LOCATED WITHIN
.004 EITHER SIDE OF (TP) RELATIVE
TO NORMAL KEY (MMC) AND
NORMAL
G
J
5 KEYS
A°
B°
C°
D°
F
DIA
H TYP
4 KEYS

PLUG SHELL
MATING FACE

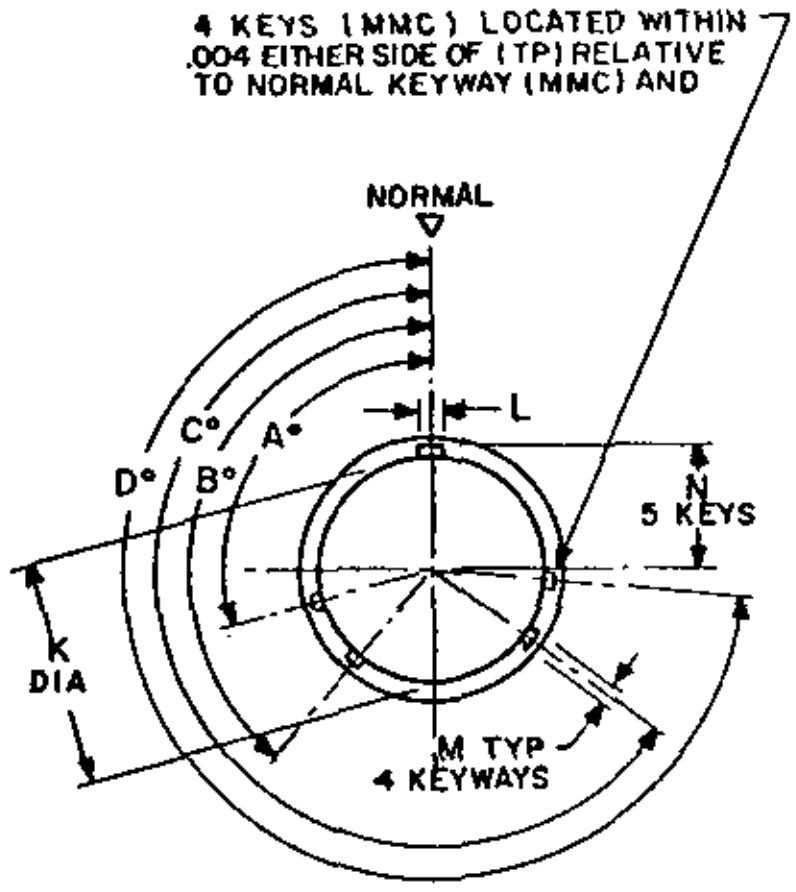
4 KEYS (MMC) LOCATED WITHIN
.004 EITHER SIDE OF (TP) RELATIVE
TO NORMAL KEYWAY (MMC) AND
NORMAL
L
C°
A°
D°
B°
N
5 KEYS
K
DIA
M TYP
4 KEYWAYS

RECEPTACLE SHELL
MATING FACE

ALTERNATE SHELL KEY POSITIONS FOR CONNECTORS													INSERT POSITION E°
POSITION	SIZE 8				SIZE 10				SIZES 12 THRU 24				
	A°	B°	C°	D°	A°	B°	C°	D°	A°	B°	C°	D°	
N-NORMAL	105	140	215	265	105	140	215	265	105	140	215	265	0
1	–	–	–	–	↑	↑	↑	↑	↑	↑	↑	↑	10
2	–	–	–	–									20
3	–	–	–	–									30
4	–	–	–	–	↓	↓	↓	↓	↓	↓	↓	↓	40
5	–	–	–	–	105	140	215	265	105	140	215	265	50
6	102	132	248	320	102	132	248	320	18	149	192	259	0
7	80	118	230	312	80	118	230	312	92	152	222	342	0
8	35	140	205	275	35	140	205	275	84	152	204	334	0
9	64	155	234	304	64	155	234	304	24	135	199	240	0
10					25	115	220	270	98	152	268	338	0

SHELL SIZE	F +.000 -.005	G ±.003	H ±.003	J +.000 -.003	K +.005 -.000	L ±.003	M +.005 -.000	N +.005 -.000
8	.424	.084	.042	.234	.428	.094	.063	.237
10	.526	.084	.052	.285	.530	.094	.072	.280
12	.696	.084	.052	.370	.700	.094	.072	.373
14	.765	.084	.052	.405	.769	.094	.072	.408
16	.892	.115	.052	.468	.896	.125	.072	.471
18	.998	.115	.052	.521	1.002	.125	.072	.524
20	1.123	.115	.052	.583	1.127	.125	.072	.586
22	1.248	.115	.052	.646	1.252	.125	.072	.649
24	1.373	.115	.052	.703	1.377	.125	.072	.711

NOTES:

1. DIMENSIONS IN INCHES. DIMENSIONING IN ACCORDANCE WITH ANSI Y14.5-1966.
2. DIMENSIONS LOCATING CONTACTS AND INSERTS ARE TRUE POSITION. FOLLOWING TOLERANCES APPLY TO INSERT INSTALLED IN SHELL.
   (A) FOR CRIMP CONTACT CONNECTORS, CENTER OF EACH HOLE IN INSERT SHALL BE LOCATED AT TRUE POSITION WITHIN .014 DIA. | ⌖ | .014 DIA. |
   (B) CENTER OF ENGAGING END OF EACH CONTACT SHALL BE LOCATED AT TRUE POSITION WITHIN .024 DIA. | ⌖ | .024 DIA |
3. UNLESS OTHERWISE INDICATED, DIMENSIONS ARE SYMMETRICAL ABOUT CENTERLINES.
4. EACH INSERT ARRANGEMENT IS SHOWN IN ITS NORMAL POSITION IN THE SHELL.
5. IN NORMAL POSITION THE INDEXING RADIUS COINCIDES WITH ℄ OF THE MASTER KEY OR KEYWAY OF SHELL.
6. POSITIONS 1 THRU 5 FOR REPLACEMENT PURPOSES ONLY.
7. FOR NEW DESIGN USE POSITIONS "N", 6 THRU 10.
8. CONTACT IDENTIFICATION: MARK IN CONTRASTING COLOR WITH PERMANENT HIGH TEMPERATURE MARKING.

CANCELED AFTER 20 Feb 78

USE MIL-STD-1554 Ⓐ

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER.

Ⓐ Denotes Changes

Reviewers: AF 99 Ⓐ

APPROVED 20 AUGUST 1971 REVISED Ⓐ 20 Feb 78

This … approved by the AFLC/LOLE
Department of … orce and is mandatory for use by
that activity. … military activities are required
to employ this standard where suitable.

P.A. AIR FORCE 85 Other Cust Ⓐ	TITLE INSERT ARRANGEMENTS MIL-C-83723 ELECTRICAL CONNECTOR	MILITARY STANDARD MS27748 (USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

5935-F089-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:15Z
Check the source to verify that this is the current version before use.