
FED. SUP CLASS
1670

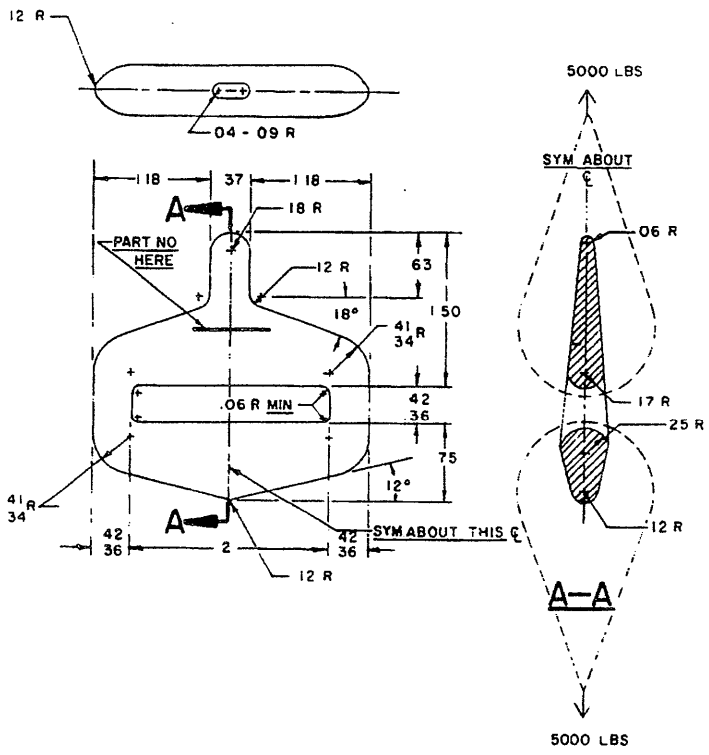

NOTES

1 MATERIAL ALUMINUM ALLOY FORGING, QQ A 367, ALLOY NO 2014 T6 GRAIN FLOW SHALL BE ORIENTED IN THE DIRECTION OF THE PROOF LOAD

2 SURFACE ROUGHNESS UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL BE 125 MAX IN ACCORDANCE WITH ANSI B46 1

3 FINISH ANODIZE, MIL A 8625 TYPE II CLASS 1

4 LINK SHALL BE SUBJECTED TO A 5000 POUND PROOFLOAD AS INDICATED BY ARROWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION

5 DIMENSIONS IN INCHES EXCEPT AS OTHERWISE SPECIFIED HEREIN TOLERANCES DECIMALS ± 03, ANGLES ± 2°

6 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

7 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(A) ENTIRE STANDARD REVISED

APPROVED 4 JAN 1971 REVISED (A) 9 AUG 1974

P.A. AIR FORCE – 82 Other Cust ARMY – GL NAVY – AS	TITLE LINK — CONNECTOR HARNESS AND PACK	MILITARY STANDARD MS27764
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG 58C6357	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Review activities: AIR FORCE - 82
ARMY - AV
NAVY

User activity:
MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:51Z
Check the source to verify that this is the current version before use.