INCH-POUND


MS28921C
w/AMENDMENT 2
14 January 2014
SUPERSEDING
w/AMENDMENT 1
26 July 2012

DETAIL SPECIFICATION SHEET

HOSE ASSEMBLY, RUBBER, HYDRAULIC, 3,000 PSI, STRAIGHT TO ELBOW 90°, FLARED TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8790.

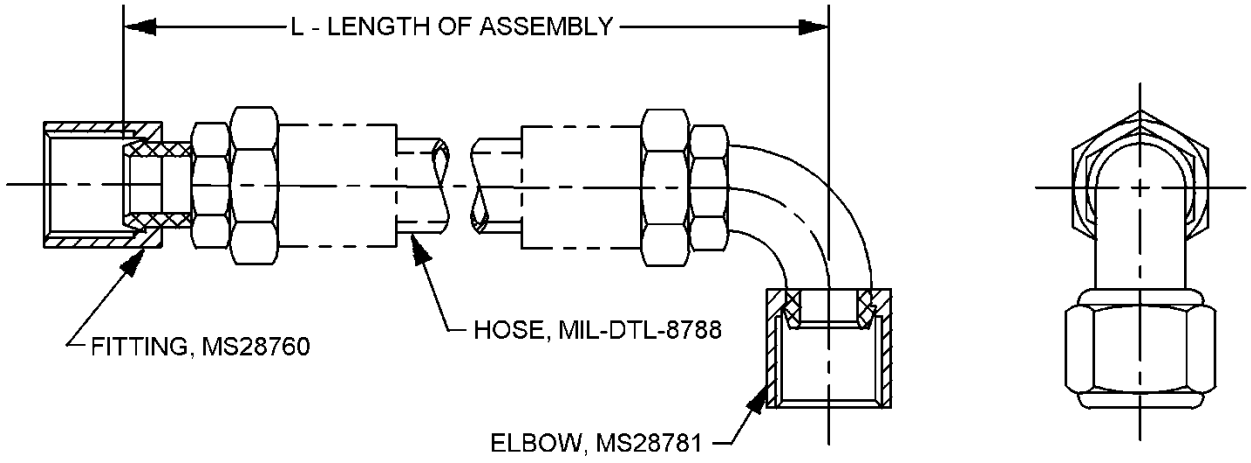

Dash size number (see note 4)	Tubing OD ref. inch (mm)	Hose ID ref. inch (mm)	End fittings PIN
-4	.25 (6.35)	.22 (5.59)	MS28760-4 and MS28781-4
-5	.31 (7.87)	.28 (7.11)	MS28760-5 and MS28781-5
-6	.38 (9.65)	.34 (8.64)	MS28760-6 and MS28781-6
-8	.50 (12.70)	.44 (11.18)	MS28760-8 and MS28781-8
-10	.63 (16.00)	.56 (14.22)	MS28760-10 and MS28781-10
-12	.75 (19.05)	.69 (17.53)	MS28760-12 and MS28781-12
-16	1.00 (25.40)	.88 (22.35)	MS28760-16 and MS28781-16

FIGURE 1. Hose assembly, flared tube dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for information only.
3. Hose assembly lengths (L) shall be as specified with the following tolerances:
   a. Under 18 inches (0.46 m) long (± .13 inch (3.3 mm)).
   b. Over 18 to 36 inches (0.46 to 0.91 m) long (± .25 inch (6.4 mm)).
   c. Over 36 to 50 inches long (0.91 to 1.27 m) (± .50 inch (12.7 mm)).
   d. Over 50 inches long (Tolerance ± 1%).
4. Dash size number refers to the nominal outside diameter of the tube in sixteenths (1/16) of an inch. A dash 8 (-8) has an outside diameter of one-half inch (8/16).


FIGURE 1. Hose assembly, flared tube dimensions and configuration - Continued.

REQUIREMENTS:

Hose assemblies shall be as specified on figure 1.

The hose assembly identification shall be marked in accordance with MIL-DTL-8790.

Part or Identifying Number (PIN) example:

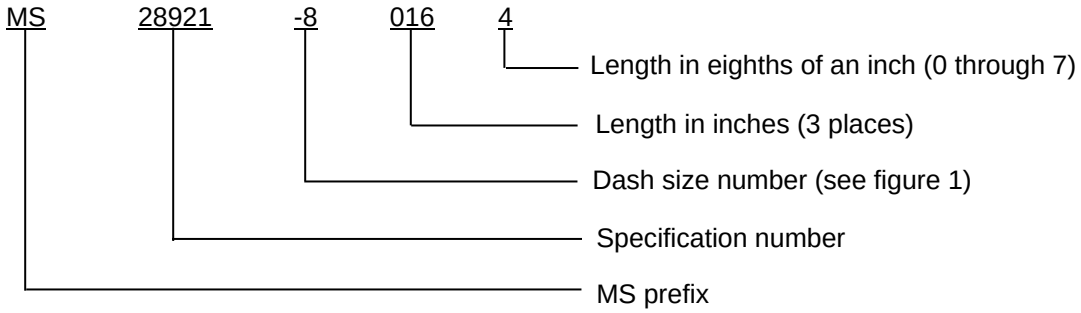

Example of a PIN: MS28921-80164, MS28921 hose assembly, .500 inch (1/2 inch) tube OD, 16.5 inches long.

For supersession data, see table I.

TABLE I. Supersession table.

Superseded PIN	Cancelled PIN
MS28921-4XXXX	MS28921EXXXX
MS28921-5XXXX	MS28921FXXXX
MS28921-6XXXX	MS28921GXXXX
MS28921-8XXXX	MS28921HXXXX
MS28921-10XXXX	MS28921JXXXX
MS28921-12XXXX	MS28921KXXXX
MS28921-16XXXX	MS28921MXXXX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-8790, this document references the following:

MIL-DTL-8788
MS28760
MS28781

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4720-2014-005)

Review activities:
Army - AV, MI
Navy - SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.