INCH-POUND

MS3127K
6 June 2003
SUPERSEDING
MS3127J
10 June 1993


DETAIL SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES 1, CRIMP TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-C-26482.

Inactive for new design as of 5 September 1975.
For new design, use MS3474 for classes E, F, and P

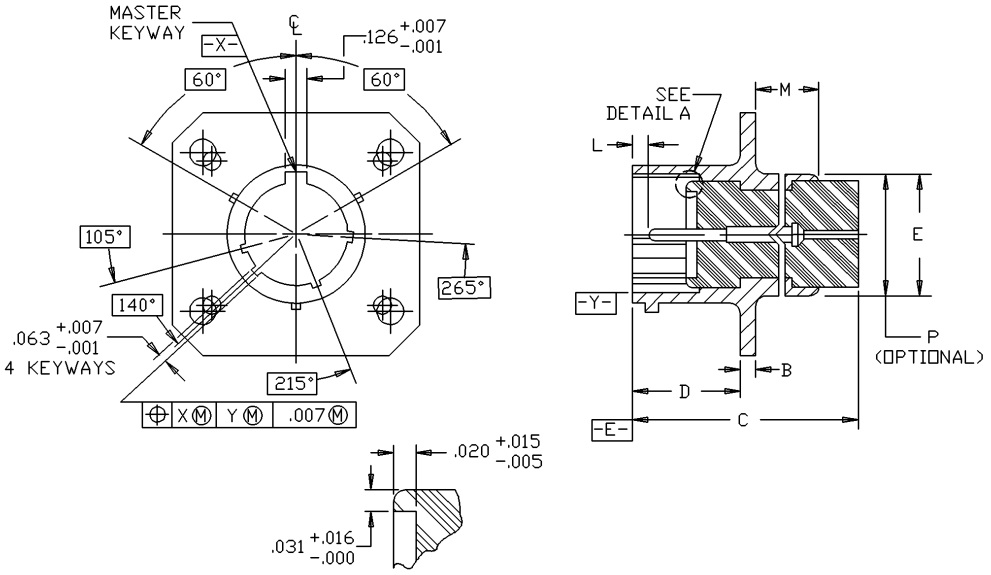


DETAIL A
STYLE P (PIN INSERT)

FIGURE 1. Dimension and configurations.


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

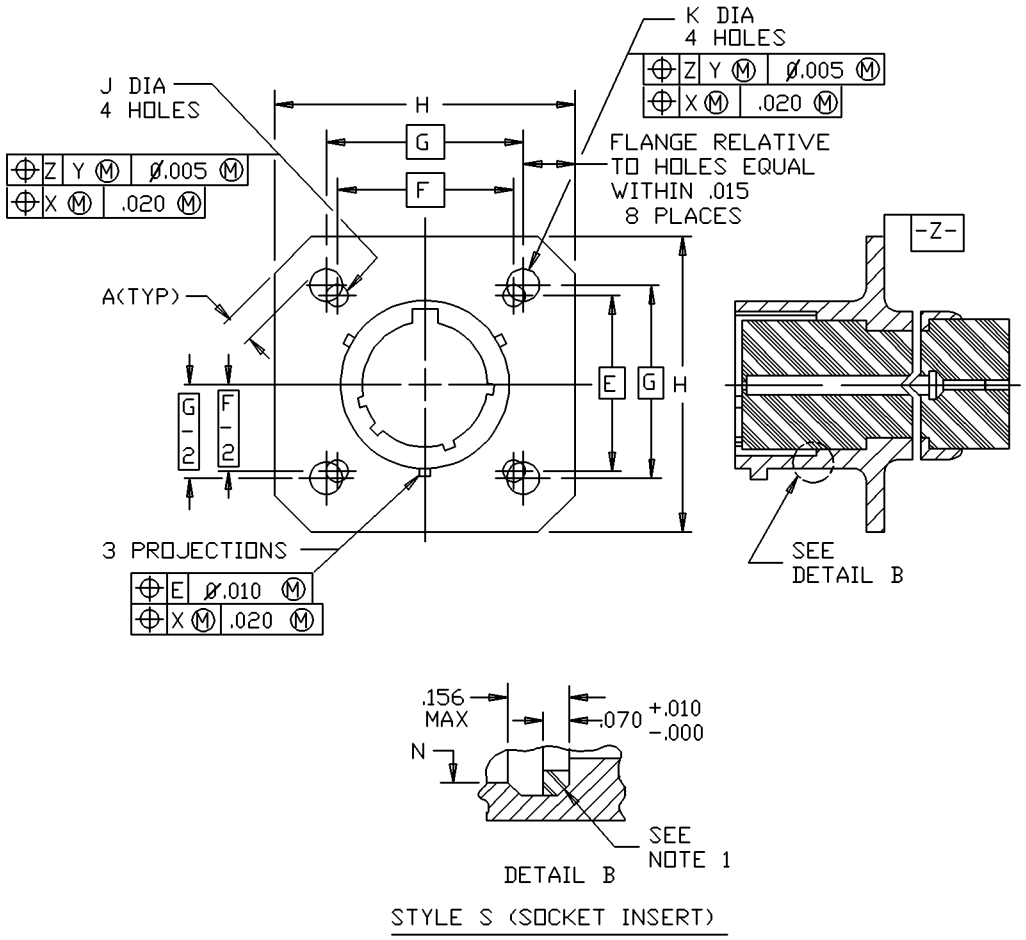



FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

| Shell Size | A min edge distance | B ± .016 thick mounting flange | C max overall length | D + .031 - .000 mounting flange location | E dia. + .031 - .024 od | F (TP) mounting holes | G (TP) mounting holes |
|---|---|---|---|---|---|---|---|
| 10 | 1.141 | .120 | .150 | .085 | .406 | .457 | .5625-24 |
| 12 | 1.266 | | | | | .564 | .6875-24 |
| 14 | 1.360 | | | | | .689 | .8125-20 |
| 16 | 1.453 | | | | | .814 | .9375-20 |
| 18 | 1.532 | | | | | .907 | 1.0625-18 |
| 20 | 1.688 | | | .147 | | 1.039 | 1.1875-18 |
| 22 | 1.766 | | | | | 1.164 | 1.3125-18 |
| 24 | 1.891 | .147 | | | | 1.289 | 1.4375-18 |

| Shell Size | H max length | J ±.005 dia mounting holes | K ±.005 dia mounting holes | L +.010 -.020 pin contact location | M max | N max ID gasket | P UNEF-2A hread (optional) |
|---|---|---|---|---|---|---|---|
| 10 | 1.141 | .120 | .150 | .085 | .406 | .457 | .5625-24 |
| 12 | 1.266 | | | | | .564 | .6875-24 |
| 14 | 1.360 | | | | | .689 | .8125-20 |
| 16 | 1.453 | | | | | .814 | .9375-20 |
| 18 | 1.532 | | | | | .907 | 1.0625-18 |
| 20 | 1.688 | | | .147 | | 1.039 | 1.1875-18 |
| 22 | 1.766 | | | | | 1.164 | 1.3125-18 |
| 24 | 1.891 | .147 | | | | 1.289 | 1.4375-18 |

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|
| .001 | 0.025 | .085 | 2.16 | .688 | 17.48 | 1.156 | 29.36 | 1.438 | 36.53 |
| .005 | 0.13 | .094 | 2.39 | .689 | 17.50 | 1.164 | 29.57 | 1.453 | 36.91 |
| .007 | 0.18 | .120 | 3.05 | .719 | 18.26 | 1.188 | 30.18 | 1.500 | 38.10 |
| .010 | 0.28 | .126 | 3.20 | .812 | 20.62 | 1.203 | 30.56 | 1.532 | 38.91 |
| .015 | 0.39 | .147 | 3.73 | .814 | 20.68 | 1.250 | 31.75 | 1.688 | 42.88 |
| .016 | 0.41 | .150 | 3.82 | .906 | 23.01 | 1.266 | 32.16 | 1.766 | 44.86 |
| .020 | 0.51 | .156 | 3.96 | .907 | 23.04 | 1.289 | 32.74 | 1.891 | 48.03 |
| .024 | 0.61 | .406 | 10.31 | .938 | 23.83 | 1.297 | 32.94 | | |
| .031 | 0.79 | .457 | 11.61 | .969 | 24.61 | 1.312 | 33.32 | | |
| .035 | 0.89 | .462 | 11.73 | 1.031 | 26.19 | 1.320 | 33.53 | | |
| .050 | 1.28 | .556 | 14.12 | 1.039 | 26.39 | 1.360 | 34.54 | | |
| .062 | 1.57 | .562 | 14.27 | 1.062 | 26.97 | 1.367 | 34.72 | | |
| .063 | 1.60 | .564 | 14.33 | 1.125 | 28.58 | 1.375 | 34.93 | | |
| .070 | 1.78 | .589 | 14.96 | 1.141 | 28.98 | 1.418 | 36.02 | | |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±1/2°.
4. True position (TP) tolerance specified are in accordance with ANSI Y14.5.
5. Intermatebility dimensions shall be in accordance with MIL-C-26482.

FIGURE 1. Dimensions and configurations - Continued.




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.
This connector mates with MS3121 and MS3126.
Insert arrangements shall be in accordance with MIL-STD-1669.
Connectors accessories: See MIL-C-85049.
Packing material shall meet the requirements of ASTM-D2000.

Part or Identifying Number (PIN) example:

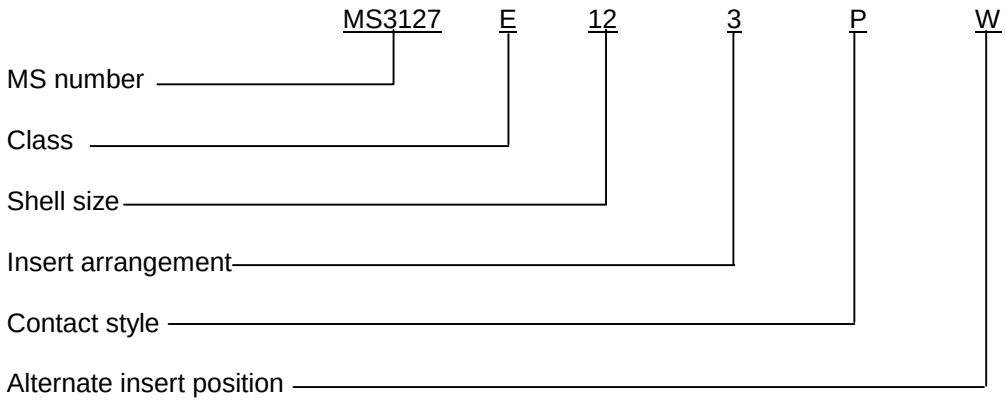


CONCLUDING MATERIAL

Custodian:
Army -CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4419-022)

Review activities:
Army - AV, MI
Navy - EC, SH
Air Force - 99



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

**INSTRUCTIONS**

1. **The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.**
2. **The submitter of this form must complete blocks 4, 5, 6, and 7, and send to preparing activity.**
3 **The preparing activity must provide a reply within 30 days from receipt of the form.**

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

| I RECOMMEND A CHANGE: | **1.** DOCUMENT NUMBER **MS3127K** | **2.** DOCUMENT DATE *(YYYYMMDD)* **2003/06/06** |
|---|---|---|

**3.** DOCUMENT TITLE
**CONNECTORS, RECEPTACLE, ELECTRICAL, SERIES 1, CRIMP TYPE, BOX MOUNTING, FLANGE, NO. 4/6 HOLES, BAYONET COUPLING**

**4.** NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

**5.** REASON FOR RECOMMENDATION

**6.** SUBMITTER

| a. NAME *(Last, First, Middle Initial)* | b. ORGANIZATION | |
|---|---|---|
| c. ADDRESS *(Include zip code)* | d. TELEPHONE *(Include Area Code)*<br>(1) Commercial<br>(2) DSN *(if applicable)* | **7.** DATE SUBMITTED *(YYYYMMDD)* |

**8. PREPARING ACTIVITY**

| a. NAME<br>Defense Logistics Agency<br>Defense Supply Center, Columbus | b. TELEPHONE *(Include Area Code)*<br>(1) Commercial **614-692-0565**<br>(2) DSN **850-0565** |
|---|---|
| c. ADDRESS *(Include Zip Code)*<br>DSCC-VAI<br>3990 E. Broad St.<br>Columbus, Ohio 43213 | IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:<br>Defense Standardization Program Office (DLSC-LM)<br>8725 John J. Kingman Road,Suite 2533<br>Fort Belvoir, Virginia 22060-6621<br>Telephone (703) 767-6888 DSN 427-6888 |

**DD Form 1426, FEB 1999 (EG)** PREVIOUS EDITION IS OBSOLETE. WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:59Z
Check the source to verify that this is the current version before use.