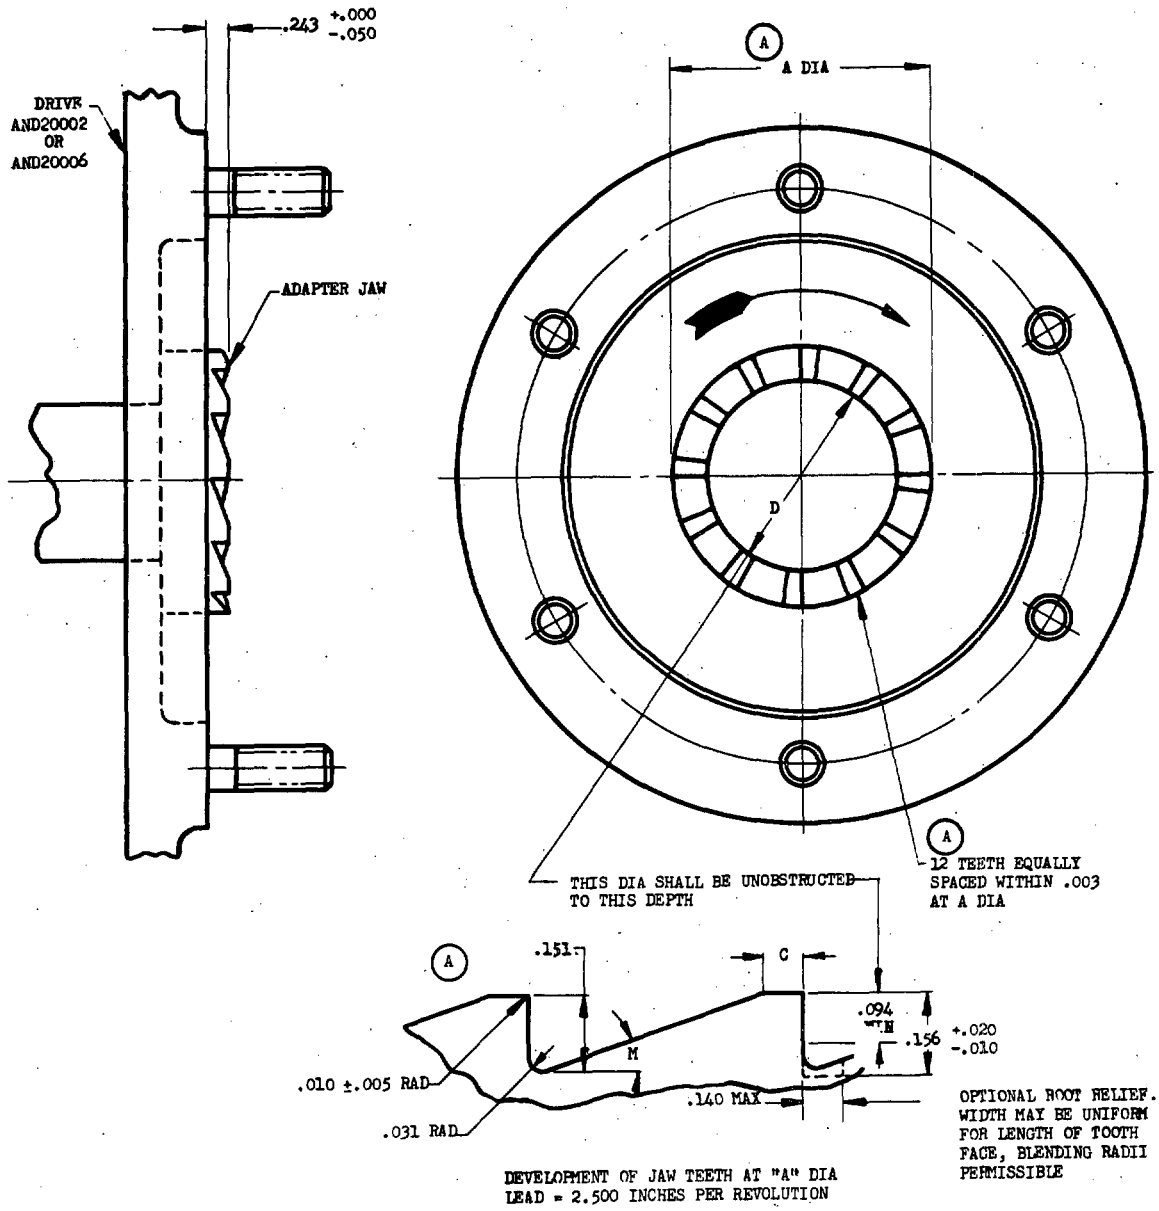


DEVELOPMENT OF JAW TEETH AT "A" DIA
LEAD = 2.500 INCHES PER REVOLUTION

(A)

FOR USE ON DRIVE	DRIVE SPLINE PD	JAW TYPE	A DIA	M ANGLE REF	C	D
XII-S	1.200	A	2.250	19° 28' 39"	.125	1.625
XII-T	1.625					
XVI-S	1.200	B	3.250	13° 45' 30"	.200	2.375
XVI-T	1.625					

METHOD OF ATTACHMENT OF STARTER JAW ADAPTER OPTIONAL.

ENGINE STARTER JAW TOOTH SURFACE HARDNESS SHALL BE ROCKWELL C58 MINIMUM.

MINIMUM DEPTH OF EFFECTIVE CASE SHALL BE .010.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER.

APPROVED 5 Mar 51 REVISED (A) 4 Mar 53

CUSTODIAN: Navy - BuAer; Air Force

PROCUREMENT SPECIFICATION: NONE

MILITARY STANDARD

ADAPTER INSTALLATION - TYPE XII OR XVI DRIVE STARTER JAW

MS33509

SHEET 1 OF 1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:03Z
Check the source to verify that this is the current version before use.