
FED. SUP CLASS 5305

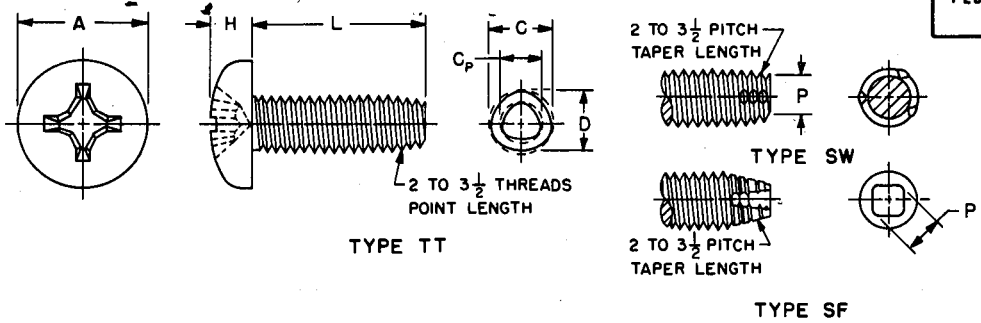

	NOMINAL SIZE		2(.086)	4(.112)	6(.138)	8(.164)	10(.190)	1/4(.250)
	THREADS PER INCH		56	40	32	32	24	20
A	HEAD DIA	MAX	.167	.219	.270	.322	.373	.492
		MIN	.155	.205	.256	.306	.357	.473
C	DIA OF CIRCLE	MAX	.0875	.1145	.1410	.1670	.1940	.2550
		MIN	.0835	.1105	.1350	.1610	.1880	.2490
C_P	DIA OF CIRCLE	MAX	.070	.090	.111	.137	.153	.206
D	ACROSS CENTER	MAX	.0840	.1095	.1350	.1610	.1850	.2460
		MIN	.0800	.1055	.1290	.1550	.1790	.2400
H	HEAD HEIGHT	MAX	.062	.080	.097	.115	.133	.175
		MIN	.053	.070	.087	.105	.122	.162
P	POINT DIA	MAX	.067	.086	.106	.132	.147	.198
		MIN	.061	.077	.095	.121	.133	.181

L LENGTH	TOL	DASH NUMBERS											
		CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL	CARBON STEEL	CRES STEEL
.250 .375 .500 .625 .750	+0 -.031	1 2 3 4	1C 2C 3C 4C	11 12 13 14 15	11C 12C 13C 14C 15C	21 22 23 24 25	21C 22C 23C 24C 25C	32 33 34 35	32C 33C 34C 35C	42 43 44 45	42C 43C 44C 45C	53 54 55	53C 54C 55C
.875 1.000 1.250 1.500	+0 -.047			16	16C	26 27	26C 27C	36 37 38 39	36C 37C 38C 39C	46 47 48 49	46C 47C 48C 49C	56 57 58 59	56C 57C 58C 59C
1.750 2.000 2.250	+0 -.062									50	50C	60 61 62	60C 61C 62C

NOTES:
1. MATERIAL: Carbon steel and corrosion-resisting steel in accordance with the procurement specification.
2. PROTECTIVE COATING: Carbon steel shall be cadmium plated and corrosion-resisting steel shall be passivated in accordance with the procurement specification.
3. THREADS: The threads shall be in accordance with the applicable requirements of the procurement specification.
4. RECESS: The recess shall be in accordance with MS9006.
5. DIMENSIONS: All dimensions are in inches.
6. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51863-1.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
9. Type TT tri-lobular section is maintained throughout the full length of the screw.

REVIEWER: AV, IS, MI, 82
USER: AS, MC, ME, MU

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 31 AUG 1970 REVISED

P.A. WC Other Cust SH 11	TITLE SCREW, TAPPING-HIGH PERFORMANCE, THREAD ROLLING, TYPES SF, SW AND TT, PAN HEAD, CROSS RECESSED	MILITARY STANDARD MS51863
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: BCXX1.1, BCXX3.4, BCXX5.4 and BQBX3	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:11Z
Check the source to verify that this is the current version before use.