

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

FED. SUP CLASS
2330

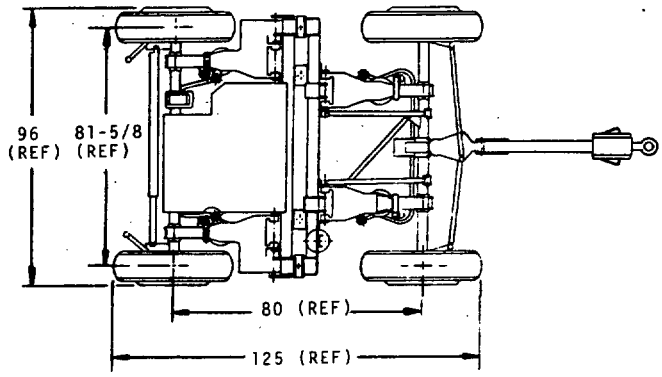

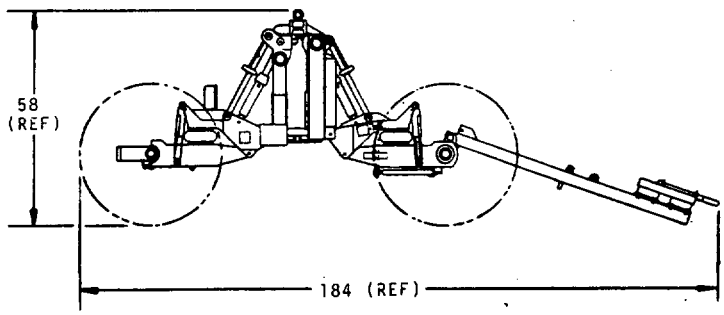

VEHICLE CHARACTERISTICS

PRIME MOVER: 2-1/2 AND 5 TON TRUCKS

DOLLY TRAILER: FRONT M833
REAR M834

CURBWEIGHT: 3,700 LBS.

WEIGHT DISTRIBUTION:
FRONT AXLE 5,565 LBS.
REAR AXLE 4,935 LBS.

GROSS WEIGHT: (DOLLY SET WITH PAYLOAD)
LOADED 14,200 LBS.

BODY DATA: (*TOWING BAR REMOVED)

OVERALL LENGTH	184 IN.
*REDUCIBLE TO	125 IN.
OVERALL WIDTH	96 IN.
OVERALL HEIGHT	81 IN.
*REDUCIBLE TO	58 IN.
MINIMUM GROUND CLEARANCE	17 IN.
DEPARTURE ANGLE	90 DEGREES

FORDING DEPTH: FULLY SUBMERGED

ELECTRICAL SYSTEM:	24 VOLT DC
COMPOSITE LIGHT ASSEMBLY	11614157
REFLECTORS: FRONT	MS35387-2
REAR	MS35387-1

AXLES: SINGLE, TUBULAR

SPRINGS: AIR	10947383
DIAMETER (INFLATED)	10.0 IN.
HEIGHT (REFERENCE)	4.25 IN.

TIRES: 9.00 x 20, CLASS A, MIL-T-12459
8-PLY MILITARY NON-DIRECTIONAL
CROSS-COUNTRY

TUBES: 9.00 x 20, GROUP 2 ZZ-I-550
RECOMMENDED PRESSURE WITH MAXIMUM LOAD:
HIGHWAY SERVICE 60 PSI
OFF-ROAD SERVICE AND AIR TRANSPORT 30 PSI

BRAKES:
SERVICE:

DRUM SIZE	15 IN.
AIR/HYDRAULIC ACTUATION	
EMERGENCY RELAY VALVE	MS53004-1
AIR RESERVOIR	10947428
SAE J10, 125 PSI	
APPROX. CAPACITY	1,080 CU. IN.

PARKING:
DRUM SIZE 15 IN.
MECHANICALLY-ACTIVATED HAND BRAKE
MOUNTED ON SERVICE BRAKES
EFFECTIVE FOR 15 PERCENT SLOPE

MAXIMUM TOWING SPEED:

CROSS COUNTRY	20 MPH
HIGHWAY	50 MPH

SHOCK ABSORBERS: HYDRAULIC 10947382

WHEELS: SINGLE, VENTILATED DISK 7389619
(FOR 20 IN. RIM)
RIM 20 x 7.5 MILITARY TYPE 7389492

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS52145-1	8736921

APPROVED 3 MAR 81 REVISED (A) 15 JAN 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE DOLLY SET, LIFT, TRANSPORTABLE SHELTER, 5-1/4 TON, M832	MILITARY STANDARD MS52145(AT)
PROCUREMENT SPECIFICATION MIL-D-62027(AT)	SUPERSEDES:		SHEET | OF |

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS ARE OBSOLETE AND NOT TO BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T10:21Z
Check to verify that this is the current version before use.