W-L-00111/63
April 12, 1976

INTERIM FEDERAL SPECIFICATION SHEET

LAMP INCANDESCENT SUB-MINIATURE
TRADE NO. 370, T-1 3/4 CLEAR BULB,
SINGLE CONTACT MIDGET FLANGED BASE, C-2F FILAMENT

(DETAIL SPECIFICATION)

The complete requirements for Lamp, Incandescent described herein shall consist of this document and W-L-C01110.

This Interim Federal Specification Sheet was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for change to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification Sheet as a valid exception to W-L-111C, dated June 23, 1966.

I. REQUIREMENTS:

Trade No.	Design volts	Design Current (Amperes)	Current tolerance %	Initial spherical candle-power (SCP)	Initial SCP tolerance %	Average life (hours)
370	18.0	.04	±10	.15	±25	10,000

A. Dimensions:


(SEE DRAWING ON REVERSE SIDE) (ALL DIMENSIONS ARE IN INCHES)

B. Electric and Photometric Test Voltage - 18.0 Volts DC.

C. Life Test Voltage - 18.0 Volts AC.

D. Acceptance Criteria Code - Code A.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:23Z
Check the source to verify that this is the current version before use.

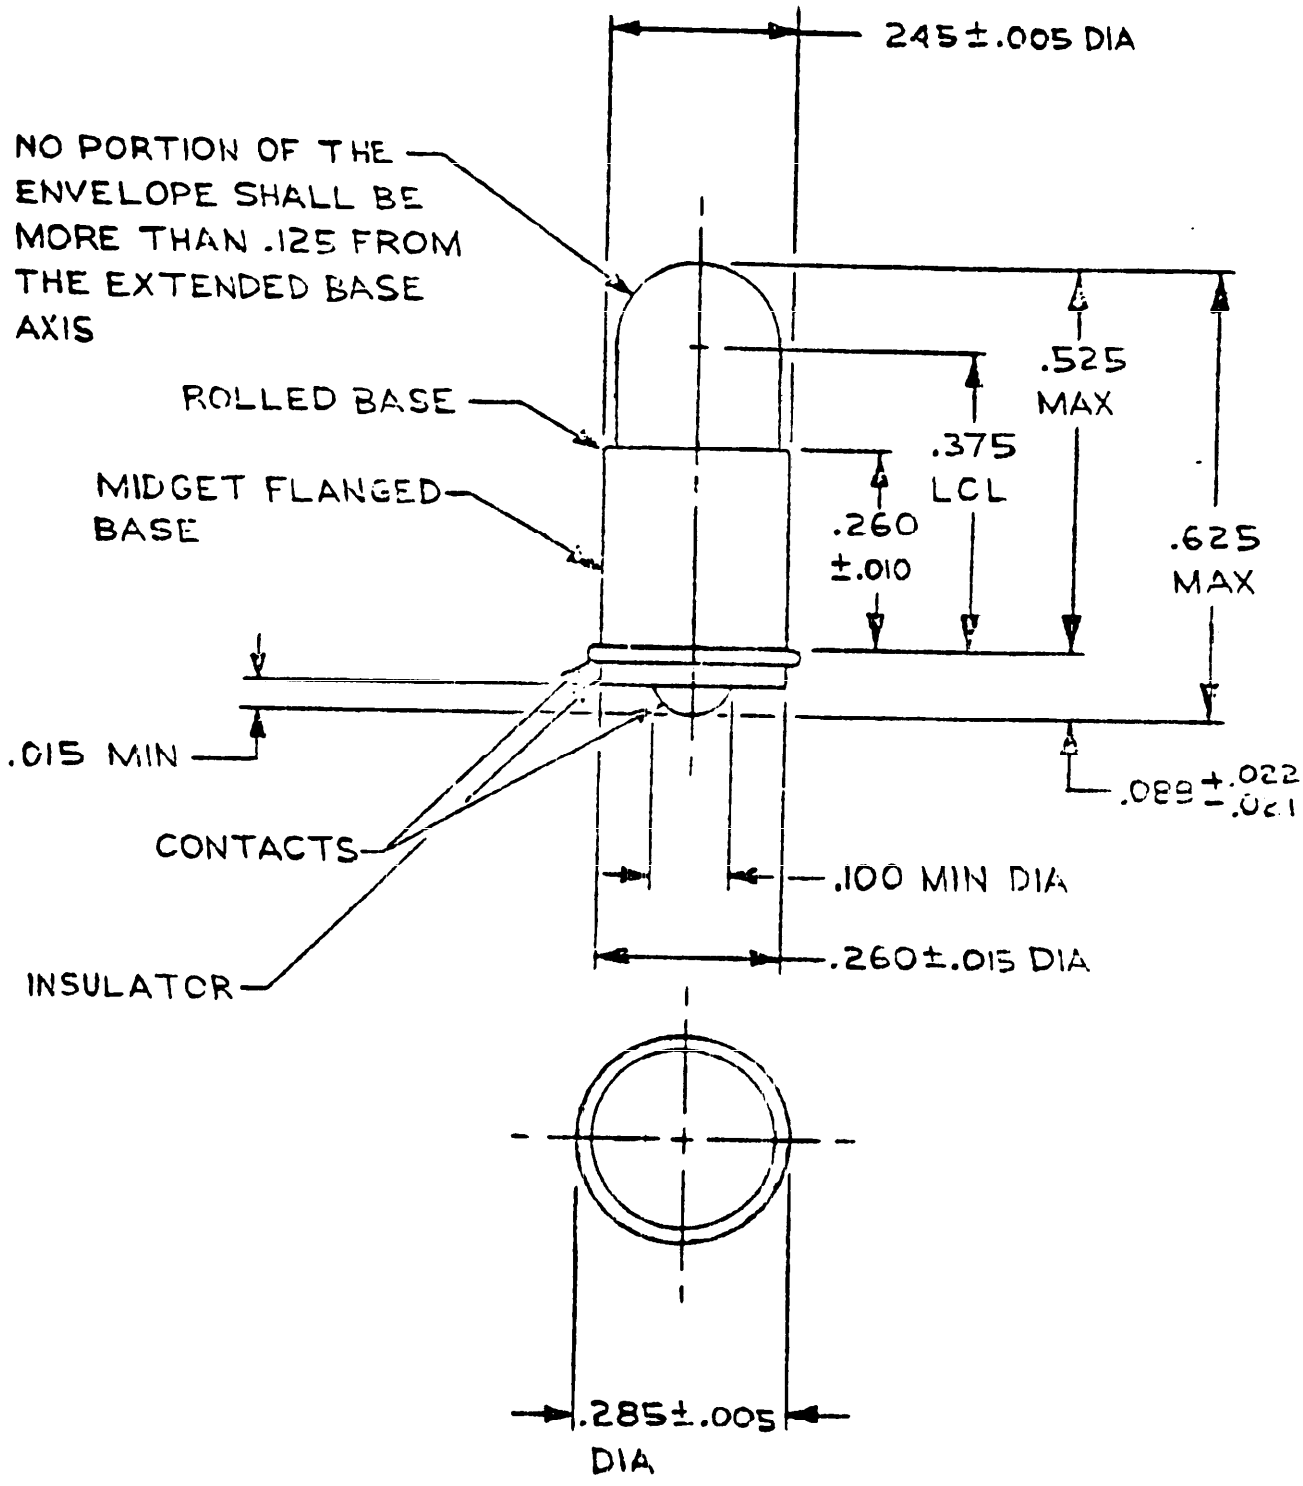

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:23Z
Check the source to verify that this is the current version before use.