W-L-00111/75
November 17, 1977

INTERIM FEDERAL SPECIFICATION SHEET

LAMP, INCANDESCENT, SUB-MINIATURE
TRADE NO. 715 AS15, T-1 CLEAR BULB, INTEGRAL
LIGHTING, WIRE TERMINAL, C-2R FILAMENT

The complete requirements for Lamp, Incandescent described herein shall consist of this document and the latest issue of W-L-00111/GEN.

This Interim Federal Specification Sheet was developed by the General Services Administration, Federal Supply Service, Mechanical and Electrical Division, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for change to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification Sheet as a valid exception to W-L-111C, dated February 11, 1958.

I. REQUIREMENTS:

Trade No.	Rated volts	Rated current (amperes)	Current tolerance percent	Initial spherical candle-power (SCP)	Initial SCP tolerance percent	Minimum required life (hours)	Design life (hours) */
715 AS15	5.0	.115	± 10	.15	± 15	4,000	40,000 +

A. Dimensions:

(See drawing on reverse side) (All dimensions are in inches).

B. Electrical and photometric test voltage: 5.0 volts DC.

C. Life test voltage: 5.0 volts AC or DC.

D. The maintained SCP at 1,000 hours for each individual lamp shall be not less than 90 percent of initial SCP.


E. Acceptance criteria code: Code B.

F. This lamp type is the same as Lamp Trade No. 715, specified in W-L-00111/33, with exception that initial SCP tolerance is ± 15 percent.

*/ For information only.

FSC 6240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:24Z
Check the source to verify that this is the current version before use.

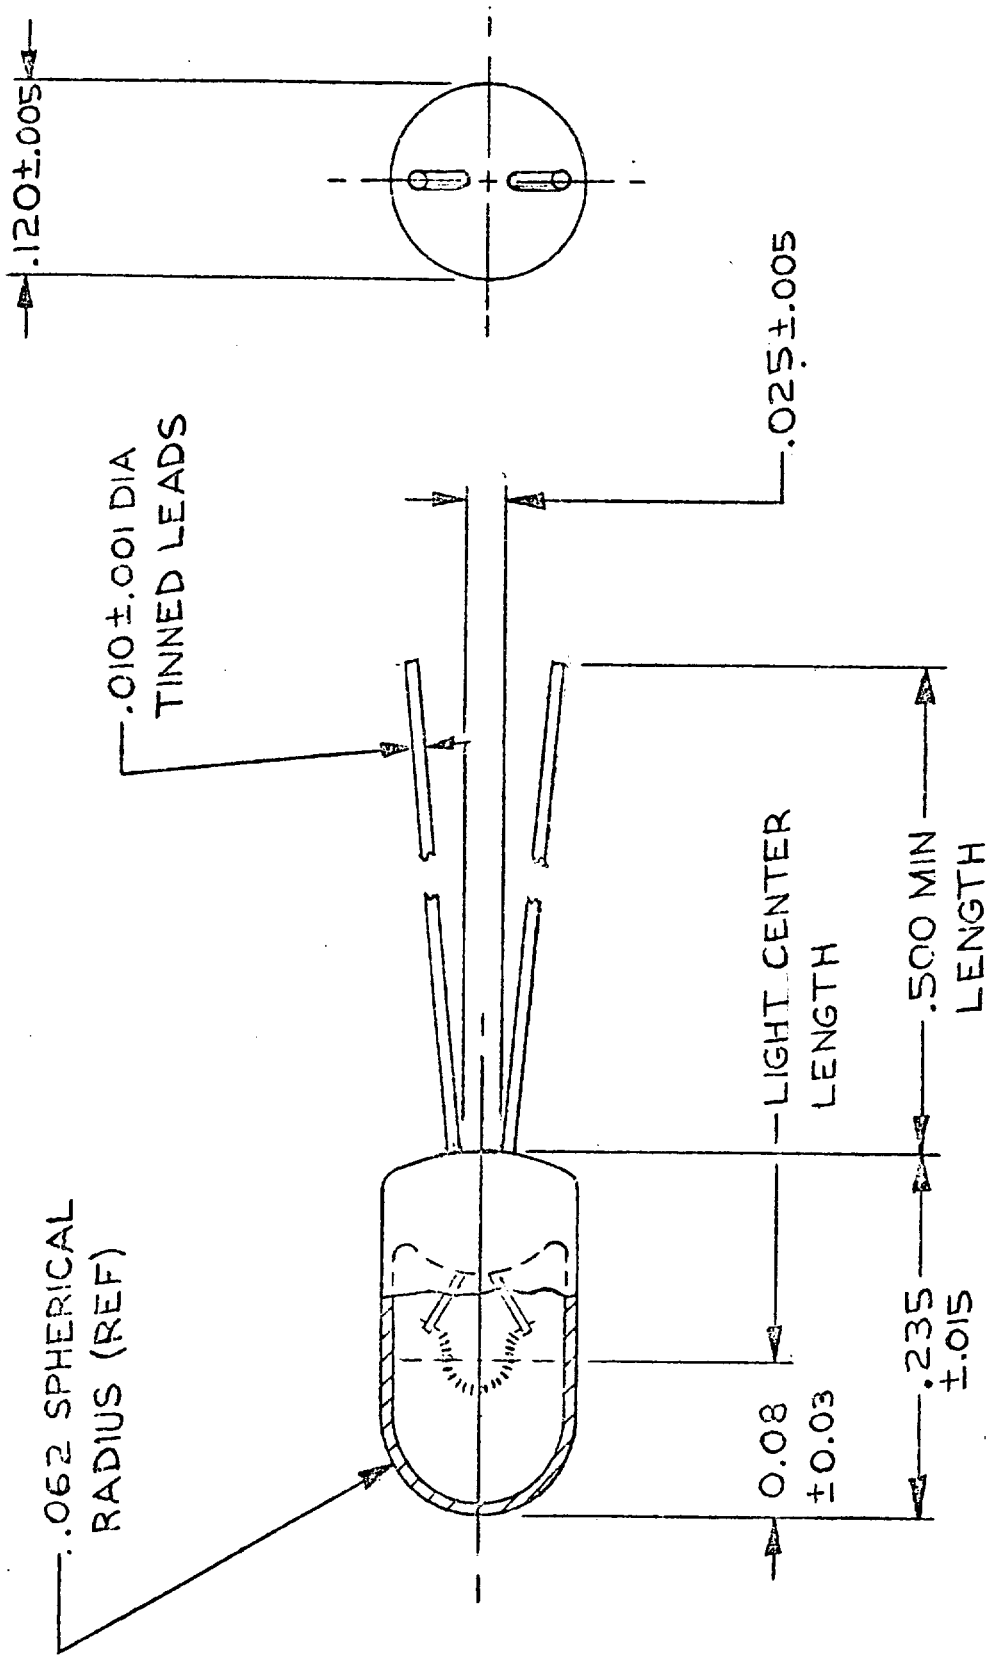

GSA-DC-78- 1279

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:24Z
Check the source to verify that this is the current version before use.