FED. SUP CLASS
1630

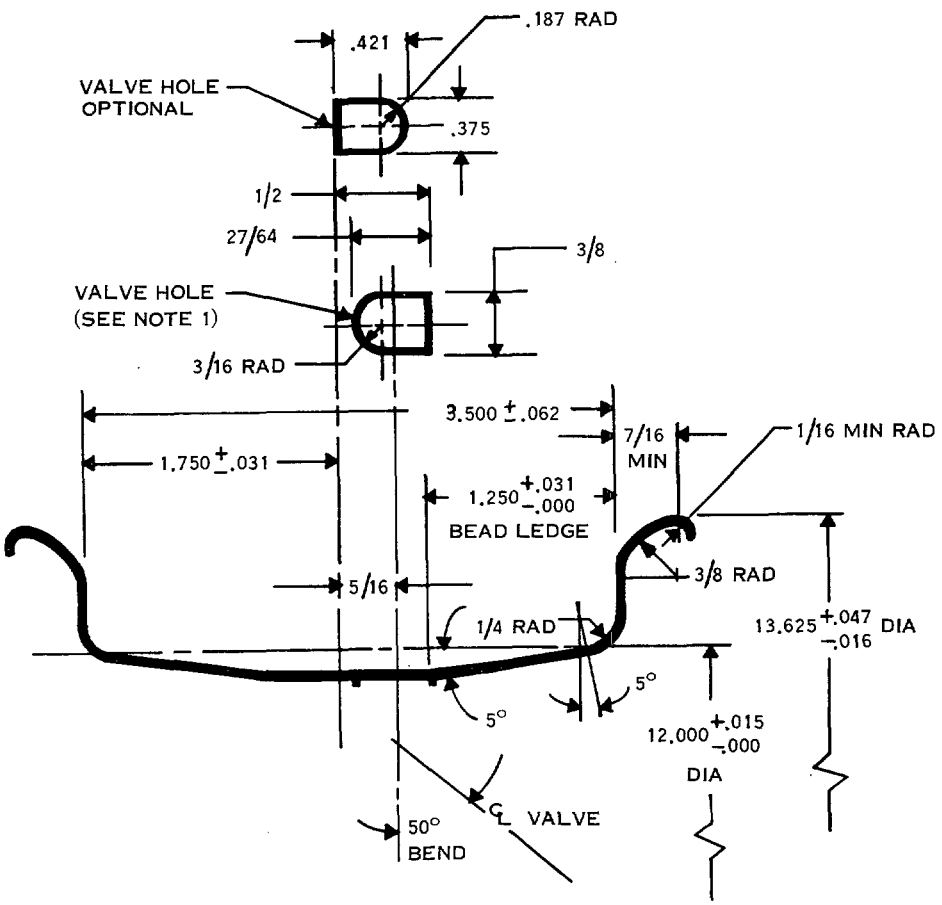

NOTES

© 1. VALVE HOLE REQUIRED ON TUBETYPE AND CONVERTIBLE WHEELS ONLY, AND SHALL BE CHAMFERRED PER AND 10593 TUBELESS WHEELS REQUIRE A MACHINED BOSS PER MS33649.

2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64, DECIMALS ± .005, ANGLES ± 1/2°

© 3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

P.A. USAF—70 Other Cust ARMY—AV NAVY—AS	TITLE RIM CONTOUR—20 X 4.4, TYPE VII, EXTRA HIGH PRESSURE, LANDING GEAR WHEEL	AIRFORCE—NAVY AERONAUTICAL DESIGN STANDARD **AND 10581**
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 16 SEP 49 — REVISED (A) 17 JAN 51 (B) 21 SEP 64 (C) 17 JUN 1969

User: Navy-MC

Reviewer: Army-AV Navy-AS

©

This AND standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.