MILITARY SPECIFICATION

HANDCUFFS AND LEG IRONS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type of metallic handcuffs and leg irons as specified (see 6.1 and 6.2).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

QQ-N-290	- Nickel Plating (Electrodeposited)
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water Displacing, Low Temperature)
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-L-10547	- Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible
MIL-C-13924	- Coating, Oxide, Black, for Ferrous Metals

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-130	- Identification Marking of U.S. Military Property
MIL-STD-147	- Palletized Unit Loads

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.3).

3.2 Materials. All parts of the leg irons, including keys, shall be fabricated of steel (see 6.4).

* 3.3 Design and construction. Design and construction of the handcuffs, leg irons, and keys shall be as shown on figure 1 and as specified herein. The handcuffs and leg irons shall be capable of withstanding a 500 pound static load, without distortion or fracture, when tested as specified in 4.4.6. Each pair of handcuffs and leg irons shall contain a right and left configuration as indicated in figure 1 (i.e., the cheek plates with the keyhole shall be on the same side of the assembled pair and the jaws shall rotate on the same side of the longitudinal center line).

3.3.1 Pins, bolt and key. Bolt pins and key pins shall have diameters a minimum of 0.002 inch larger than the required holes in the cheek plates. The interference fit fabrication shall not cause the bolt or key pin to shear out the plates or to malform the pins or the holes. The ends of all bolt and key pins shall not be below the exposed surfaces of the plates. At the option of the contractor, heading of the pins will be permitted as an alternative method of securing the pins, providing sharp edges do not result.

3.3.2 Locks. Each handcuff and leg iron shall be provided with a double-locking mechanism (i.e., a mechanism that shall be capable of locking automatically when the handcuff is applied to the wrist or the leg iron to the ankle and that is capable of securing the jaw of the handcuff or leg iron against travel in either direction). Locks shall be capable of being released by the use of the key without any undue force when examined as specified in 4.4.5. Locking mechanisms shall not unlock without the use of keys. Opening of the locks by tampering shall not be accomplished when the handcuff or leg iron is tested as specified in 4.4.6. In addition, the locking mechanism shall be capable of withstanding a static load of 500 pounds without fracture or distortion of the mechanism when tested as specified in 4.4.6.

3.3.3 Dimensions.

* 3.3.3.1 Handcuff. Each handcuff shall have a minimum opening of 2 inches for insertion of the wrist. The inside perimeter of the handcuff shall be a minimum of 8 inches when the jaw is engaged at the first notch entering the locking mechanism. The inside perimeter of the handcuff shall be a maximum of 6 1/2 inches when the jaw is engaged at the last notch entering the locking mechanism. The maximum overall length of the pair of handcuffs shall be 9 1/2 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

3.3.3.2 Leg iron. Each leg iron shall have a minimum opening of 2 3/4 inches for insertion of the ankle. The inside perimeter of the leg iron shall be a minimum of 10 1/4 inches when the jaw is engaged at the first notch entering the locking mechanism. The inside perimeter of the leg iron shall be a maximum of 9 inches when the jaw is engaged at the last notch entering the locking mechanism.

3.3.3.3 Chains. Each pair of handcuffs or leg irons shall be connected with a length of chain. Each link in the chain shall be welded. The end links shall connect with the swivel eyes which shall be attached to each handcuff or leg iron. The length of chain, including swivel eyes, between each pair of handcuffs shall be 1 1/2 inches to 2 1/2 inches. The length of chain, including swivel eyes, between each pair of leg irons shall be 14 inches to 16 inches.

* 3.3.4 Weights. Each pair of handcuffs shall weigh not more than 15.0 ounces. Each pair of leg irons shall weigh not more than 3 pounds when tested as specified in 4.4.6.

3.3.5 Keys. Two keys shall be furnished with each pair of handcuffs and leg irons. Keys shall be attached to each pair of handcuffs and leg irons so that they will remain together in shipment and storage.

3.3.6 Welding. All welds shall be sound and smooth and free from cracks, incomplete fusion, and deformation of material.

3.4 Finish. Unless otherwise specified (see 6.2), handcuffs and leg irons shall be given a nickel plating or black oxide finish. Keys shall be given a nickel plating.

3.4.1 Nickel plating. Nickel plating shall conform to class 1, grade F of QQ-N-290.

3.4.2 Black oxide. Black oxide finish shall conform to class 1 of MIL-C-13924. Alternatively, a black oxide finish obtained by other treatments (e.g., in a controlled high temperature atmosphere in the presence of charred bone or similar carbonaceous matter) is acceptable provided that application, coverage, color, and quality coating requirements of MIL-C-13924 are met.

* 3.5 Marking for identification. The finished handcuffs or leg irons shall be permanently marked with the manufacturer's name or trademark and part number or identifying number in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

3.6 Operating instructions. Each pair of handcuffs or leg irons shall be provided with operating instructions. Operating instruction data shall be legibly printed in indelible ink, either on the inside of the paperboard box or on a separate sheet of waterproof paper placed within each unit pack.

3.7 Lubrication. The handcuffs or leg irons, as applicable, shall be lubricated by completely submerging them in oil conforming to VV-L-800.

3.8 Workmanship. The handcuffs or leg irons shall be free of burrs, slivers, sharp edges, dents, tool marks, or corrosion. The finish shall not be scratched, damaged, or marred exposing base metal. Components shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3, 4.4.4, and 4.4.5 and tested as specified in 4.4.6. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Dimensional examination of bolt pins and key pins. Examination shall be made of the bolt pins and key pins, prior to assembly to the cheek plates, for compliance with the dimensional requirements as specified in 3.3.1. The lot shall be expressed in units of bolt pins or key pins, as applicable. The sample unit shall be one bolt pin or one key pin, as applicable. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

4.4.2 In-process examination. Inspection shall be made to determine that all parts of the locking mechanism are fabricated of steel and that all handcuffs or leg irons, as applicable, are lubricated by completely submerging them in lubricating oil. Whenever nonconformance is noted, correction shall be made to the affected items and the process.

* 4.4.3 End item visual examination. The end item shall be examined for the defects listed in table I. The lot size shall be expressed in units of handcuffs or leg irons, as applicable. The sample unit shall be one handcuff or leg iron, as applicable. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect
Finish	
General	Not finished, not as specified Scratched, damaged, or marred exposing base metal Foreign matter embedded Corroded area
Nickel plating (when applicable)	Not smooth or continuous; not adherent (i.e., blistered, peeled, or flaked); pitted; excessive buildup of plating on edge
Black oxide (when applicable)	Not uniformly black; spotted or otherwise discolored
Construction and workmanship	Any part missing, broken or malformed, loose or not in proper alignment, swivel eye binds when rotated Rivet or pin (when headed) insecurely peened or not peened neatly Any burr, sliver, sharp edge, dent, or tool mark Metal split or cracked End of pin set below exposed surface of plate Key not securely attached to handcuffs or leg irons, keys missing Cuff construction not correctly paired (i.e., not a right and left cuff, keyholes not on same side, or jaws do not rotate on the same side of the longitudinal center line as shown in figure 1)
Welding	Unsound, cracked, incomplete Not smooth Weld missing on chain link Metal burnt or deformed
Marking	Missing, illegible, incorrect, or not permanently marked

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

4.4.4 End item dimensional examination. The end item shall be examined for the dimensions specified in 3.3.3. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of handcuffs or leg irons, as applicable. The sample unit shall be one handcuff or leg iron, as applicable. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 End item operational examination. The end item shall be examined for defects listed in table II. The lot size shall be expressed in units of handcuffs or leg irons, as applicable. The sample unit shall be one handcuff or leg iron, as applicable. The inspection level shall be II and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE II. End item operational defects

Examine	Defect
Operation	Key cannot open locks or requires undue force to unlock handcuff or leg iron Handcuff or leg iron cannot be double-locked Handcuff or leg iron does not lock automatically Any malfunctioning in the opening and closing of the handcuffs or leg irons (e.g., jaw binds in locking to the position; jaw does not rotate freely)

4.4.6 End item testing. The completely fabricated handcuffs or leg irons shall be tested as specified in table III for the characteristics shown. The lot size shall be expressed in units of handcuffs or leg irons, as applicable. The sample unit shall be one pair of handcuffs or leg irons, as applicable which shall be subjected to all tests as specified in 4.5. The inspection level for each characteristic shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 2.5. The sample unit shall be tested in the following sequence as specified in 4.5.3, 4.5.2, and 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

TABLE III. End item testing

Characteristic	Requirement paragraph	Test method or paragraph	Number of determinations per sample unit
Proof load, handcuffs or leg irons	3.3	4.5.1	1
Proof load, locking mechanisms	3.3.2	4.5.2	2
Proof tampering, locking mechanisms	3.3.2	4.5.3	2
Weights	3.3.4	Commercial	1

4.4.7 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of unit packs is more or less than specified
Operating instruction data	Missing, illegible

4.4.8 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.5 Methods of inspection.

4.5.1 Proof load, handcuffs or leg irons. Handcuffs or leg irons, as applicable, shall be locked with the jaw engaged at the first notch entering the locking mechanism. A static load of 500 pounds shall be applied in the direction of the chain (longitudinal) from the outer edge of one handcuff or leg iron, to the outer edge of the other handcuff or leg iron as shown on figure 1.

4.5.2 Proof load, locking mechanism. Handcuffs or leg irons, as applicable, shall be locked with the jaw engaged at the first notch in the locking mechanism. A static load of 500 pounds shall be applied at right angles to the direction of the chain and from one side of the handcuff or leg iron to the other side of the handcuff or leg iron as shown on figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

4.5.3 Proof tampering, locking mechanism. Each handcuff or leg iron, as applicable, shall be locked with the jaw engaged at the seventh notch in the locking mechanism and double-locked. Using a flat narrow piece of metal, pry between the notched jaw and the locking mechanism in an attempt to open the handcuff or leg iron.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each pair of handcuffs or leg irons, with keys attached, shall be wrapped in greaseproof barrier-material conforming to type II, grade A, class 1 or 2 of MIL-B-121. Each pair of handcuffs or leg irons shall then be unit packed in the most compact manner in a snug-fitting paperboard box conforming to variety 1, style III, type G, class 1 of PPP-B-566; or type I, variety 1, class A, style 3 or 4 of PPP-B-676. Thumb holes may be waived. Each box, containing operating instructions as specified in 3.6, shall be closed in accordance with the applicable box document.

5.1.2 Commercial. Handcuffs or leg irons shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Fifty handcuffs or leg irons, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to PPP-B-621, style optional. Shipping containers shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Closure and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-621.

5.2.2 Level B. Fifty handcuffs or leg irons, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, variety optional, grade 275 of PPP-B-636, except that the weight limitation requirements shall not apply. Each fiberboard shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

5.2.3 Commercial packing. Handcuffs or leg irons, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), handcuffs or leg irons, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

6.1 Intended use. Handcuffs and leg irons are used to restrict the physical movement of an apprehended person.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. When handcuffs or leg irons are required (see 1.1).
c. When a first article is required (see 3.1, 4.3, and 6.3).
d. When other than black oxide finish or nickel plating is required (see 3.4).
e. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
f. When weather-resistant boxes are required for level B shipments (see 5.2.2.1).
g. When palletization is required (see 5.3).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

* 6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

* 6.5 Subject term (key word) listing.

Handcuff
Leg iron
Restrictions, physical

6.6 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 99

Review activity:

Air Force - 11, 82
DLA - CT

User activity:

Navy - MC
Air Force - 45

Preparing activity:

Army - GL

Project No. 8465-0939

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

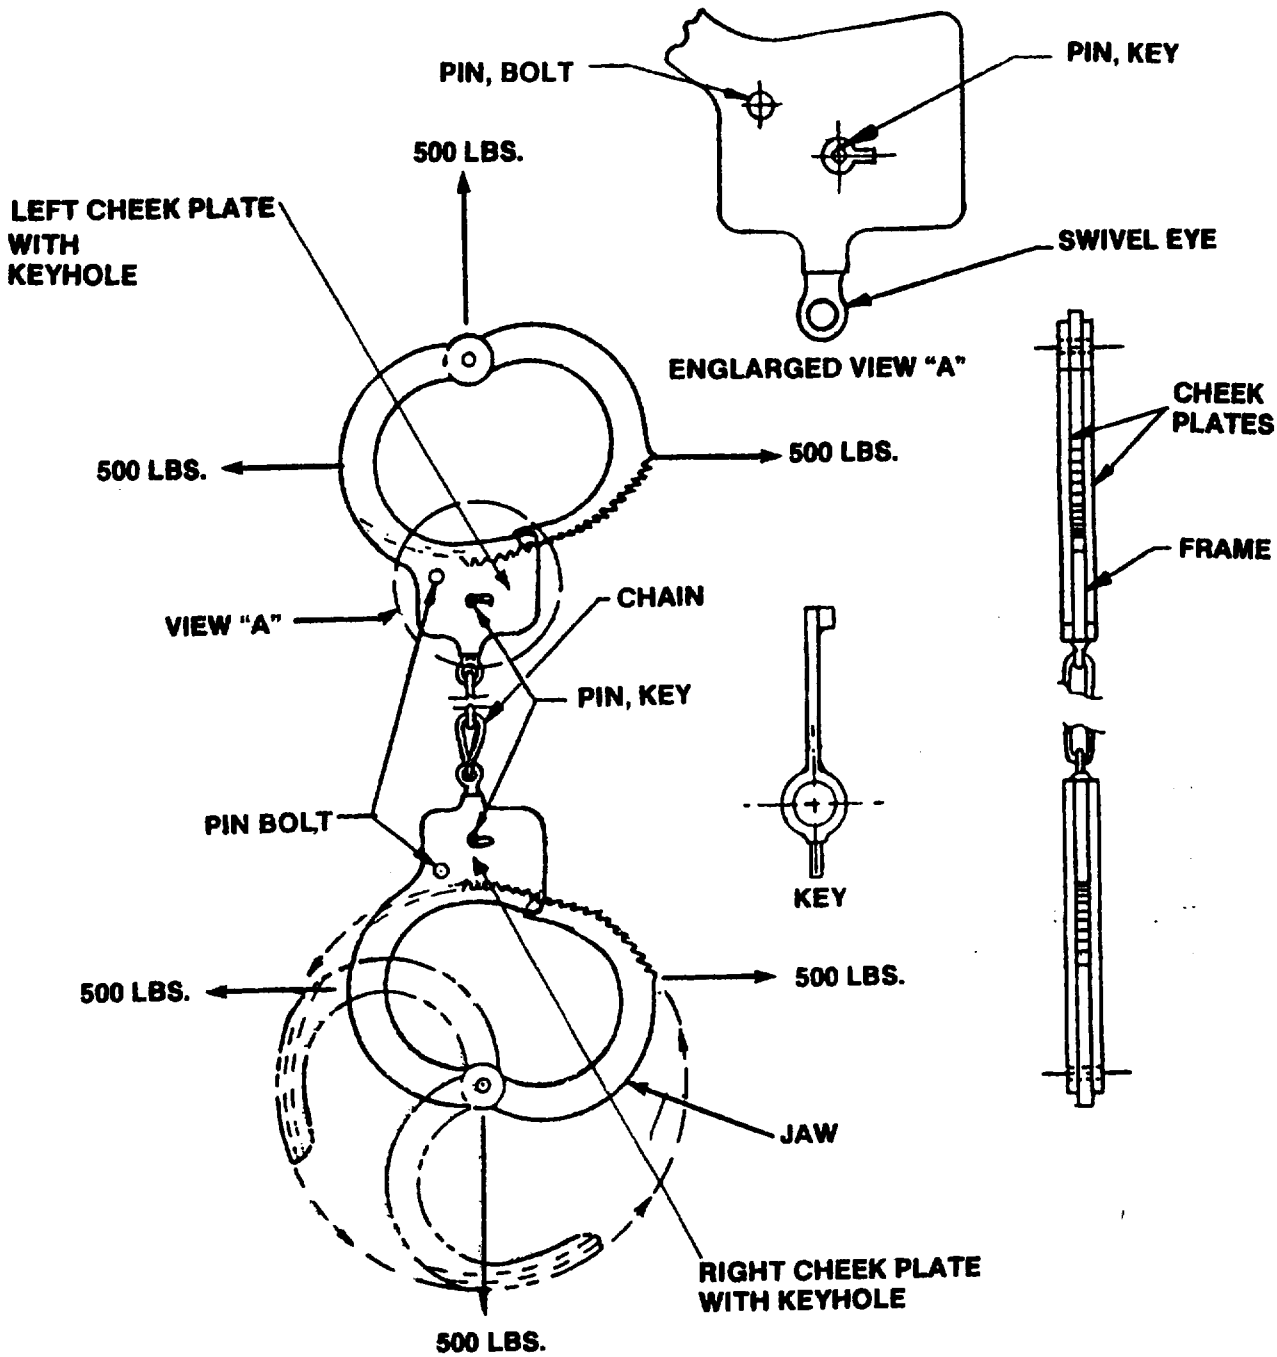


Figure 1. Handcuffs and Leg Irons

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-H-20050E	Handcuffs and Leg Irons

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP 1 Apr 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T07:15Z
Check the source to verify that this is the current version before use.