METRIC
MIL-PRF-29580C
17 September 1998
SUPERSEDING
MIL-S-29580B
16 December 1993

PERFORMANCE SPECIFICATION

SPECTACLES, AVIATOR'S, MULTIPLE WAVELENGTH LASER PROTECTIVE, EDU-5/P (WITH CASE)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification addresses the requirements for rotary and fixed wing aviator's spectacles with carrying case, designated EDU-5/P, which provide protection against multiple fixed laser wavelengths.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Air Warfare Center Aircraft Division, Code 414100B120-3, Highway 547, Lakehurst, NJ 08733-5100, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

2.2 Other Government publications. The following Government publication forms part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

NATIONAL INSTITUTE OF STANDARDS AND TECHNOLOGY (NIST)

NIST Circular 533	- Method for Determining the Resolving Power of Photographic Lenses
NIST Special Publication 374	- Method for Determining the Resolving Power of Photographic Lenses

(Application for copies should be addressed to the National Institute of Standards and Technology, Inquiries Office, Building 101, Room A903, Gaithersburg, MD 20899.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR QUALITY CONTROL (ASQC)

ASQC-Z1.4	-	Procedures, Sampling and Tables for Inspection by Attributes. (DoD adopted)

(Application for copies should be addressed to the American Society for Quality Control, 611 East Wisconsin Avenue, P.O. Box 3005, Milwaukee, WI 53201-3005.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM-D412	-	Vulcanized Rubber and Thermoplastic Rubbers and Thermoplastic Elastomers - Tension, Standard Test Methods for. (DoD adopted)
ASTM-D1003	-	Haze and Luminous Transmittance of Transparent Plastics, Standard Test Method for. (DoD adopted)
ASTM-D1415	-	Rubber Property - International Hardness, Standard Test Method for. (DoD adopted)
ASTM-D3935	-	Polycarbonate (PC) Unfilled and Reinforced Material, Standard Specification for. (DoD adopted)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), samples shall be subjected to first article inspection in accordance with 4.2.

3.2 Materials. The contractor shall select the materials, but the materials shall meet all the operational and environmental requirements specified herein.

3.2.1 Lens material. The polycarbonate material used for the spectacle lenses shall be in accordance with ASTM-D3935.

3.3 Design. The spectacles shall provide protection for aircrew against multiple fixed laser wavelengths. They shall be compatible with all helmets, visors, and other head attached hardware that Navy and Army rotary and fixed wing aircrew use. They shall not require external power or apparatus. All cockpit displays, lights, and phosphors shall be visible when the spectacles are worn.

3.3.1 Lenses. The lenses shall meet the protection requirements of this specification. Lenses shall have scratch resistant surfaces. Markings on the lenses shall be in accordance with 3.6.1.

3.3.2 Frame. The frame shall be corrosion and heat resistant. The color of the frame shall be black. It shall be compatible with the Chemical Biological Radiological (CBR) Protective Assembly, Type Designator A/P22P-9(V). If various frame sizes are required to meet the protective requirements, these sizes shall be marked on the frame and shall be in accordance with 3.6.1.

3.3.3 Carrying case. A black carrying case shall be provided with each pair of spectacles. It shall have a means of closure. A specified force applied to the lens area of the closed case, in accordance with 4.5.6, shall not damage the spectacles. The inside surface shall be sufficiently smooth to prevent lens scratches. Marking shall be in accordance with 3.6.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

3.3.4. Lens overlay template. A lens overlay template shall be included with the carrying case if the spectacles use an eye centered design. The lens overlay template shall locate the optical center of the lenses and allow this location to be temporarily marked on the lens.

3.4 Performance characteristics.

3.4.1 Visual and dimensional examination. When visually and dimensionally examined, the spectacles and carrying case shall meet the requirements specified herein. Table I shall be used to identify the defects.

3.4.2 Optical requirements.

3.4.2.1 Matching. When tested as specified in 4.5.1.1, the design eyepoint of the right and left lenses of the spectacles shall match in location and shall match at the design eyepoint of each lens in sign, prism, and power to the requirements of 3.4.2.2.1, 3.4.2.2.2, and 3.4.2.3.

3.4.2.2 Prismatic deviation (optical power).

3.4.2.2.1 Vertical prismatic deviation. When measured at the design eyepoint of the right and left lens as specified in 4.5.1.2.1, the prismatic power shall not:

a. Exceed a prism imbalance of 0.125 diopter for prism of the same or opposite base (base up – base up ≤ 0.125 or base down – base down ≤ 0.125 or base up – base down ≤ 0.125).

b. Exceed 0.25 diopter of base up/base down or exceed a total of 0.5 prism diopter of the same base (base up + base up ≤ 0.5).

3.4.2.2.2 Horizontal prismatic deviation. When measured at the design eyepoint of the right and left lens as specified in 4.5.1.2.2, the prismatic power shall not:

a. Exceed a prism imbalance of 0.125 diopter base in (base in – base in ≤ 0.125) or 0.25 diopter base out (base out – base out ≤ 0.25).

b. Exceed 0.25 diopter for base in/base out or exceed a total of 0.5 prism diopter of the same base (base out + base out ≤ 0.5).

3.4.2.3 Spherical and cylindrical power. When measured as specified in 4.5.1.3, the spherical and cylindrical power of the plano lenses shall not exceed ±0.125 diopter at any point on the lens or differ in sign at left and right design eyepoint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

3.4.2.4 Lens defects. When inspected as specified in 4.5.1.4, the spectacle lenses shall be free from irregularities affecting optical qualities.

3.4.2.5 Lens fit. When inspected as specified in 4.5.1.5, the spectacles shall show no evidence of visible space between the frame and lens.

3.4.2.6 Curvature. When measured as specified in 4.5.1.6, the curvature of the lenses shall be not less than 5 diopters, nor greater than 15.5 diopters.

3.4.3 Spectral transmittance requirements.

3.4.3.1 Optical density and angular protection. When tested as specified in 4.5.2.1, the spectacles shall have the required optical density and prevent passage of threat wavelengths or laser radiation regardless of the threat incidence angle (see 6.2).

3.4.3.2 Transmittance. When computed as specified in 4.5.2.2, the scotopic transmittance shall be not less than 20 percent. Photopic and scotopic transmittance shall not differ by more than 10 percent of the measured value between lenses or over the surface of the lens.

3.4.3.3 Near-infrared transmittance. When computed as specified in 4.5.2.3, the average near-infrared transmittance shall be less than 15 percent.

3.4.3.4 Erythermal ultraviolet transmittance. When computed as specified in 4.5.2.4, the erythermal ultraviolet transmittance shall be not greater than 0.2 percent.

3.4.3.5 Haze. The haze value of the lenses shall be minimized and when determined as specified in 4.5.2.5, shall be not greater than 4 percent.

3.4.3.6 Abrasion resistance. After being subjected to the abrasion test specified in 4.5.2.6, haze shall be not greater than 6 percent and the transmittance shall not decrease by more than 4 percent. For example, an initial value of 20 percent transmittance shall not decrease to less than 16 percent.

3.4.4 Environmental requirements.

3.4.4.1 Radiation-induced damage resistance. When the lenses are tested as specified in 4.5.3.2 and 4.5.3.3, transitory or permanent radiation-induced changes in the optical density or transmittance shall not occur at power levels up to 100 millijoules (mj).

3.4.4.2 High temperature. When tested as specified in 4.5.3.4, the spectacles shall withstand high temperature stresses, with no delamination at lenses or coatings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

3.4.4.3 Low temperature. When tested as specified in 4.5.3.5, the spectacles shall withstand low temperature stresses, with no delamination of lenses or coatings.

3.4.4.4 Temperature shock. When tested as specified in 4.5.3.6, the spectacles shall withstand the effects of rapid changes in ambient temperature, with no delamination of lenses or coatings.

3.4.4.5 Rain. When tested as specified in 4.5.3.7, the spectacles shall withstand the effects of prolonged exposure to blowing rain, with no delamination of lenses or coatings.

3.4.4.6 Humidity. When tested as specified in 4.5.3.8, the spectacles shall be capable of operation under wide temperature and humidity extremes, with no delamination of lenses or coatings.

3.4.4.6.1 Adhesion of coating. When tested as specified in 4.5.3.8.1, there shall not be any delamination of the lenses or coatings. Delamination, removal, or loosening of the coating shall be cause for rejection.

3.4.4.7 Salt fog resistance. When tested as specified in 4.5.3.9, the spectacles shall withstand the effects of prolonged environmental salt fog, with no delamination of lenses or coatings.

3.4.5 Impact resistance. When tested as specified in 4.5.4, the lens shall not fracture through its entire thickness and across a complete diameter into two or more separate pieces.

3.4.6 Frame.

3.4.6.1 Corrosion resistance. When tested as specified in 4.5.5.1, there shall be no evidence of corrosion on any of the surfaces in contact with the wearer.

3.4.6.2 Heat resistance. When tested as specified in 4.5.5.2, there shall be no visible signs of blistering, discoloration, or visible white or crystalline film.

3.4.6.3 Ductility. When tested as specified in 4.5.5.3, there shall be no visible cracks passing completely across the frame or temple arms.

3.4.6.4 Adhesion of plating. When tested as specified in 4.5.5.4, adhesion of any plating and underplating shall be such that the coating and undercoating shall not separate from each other or from the base material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

3.5 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. The drawing number requirements shall govern changes in the manufacturer's part numbers.

3.6 Identification of product.

3.6.1 Spectacles. Markings on the spectacles shall not cause them to be classified. The spectacles shall include the following additional markings:

a. Each lens shall be identified and controlled from the time of final assembly. The lot number, lens number (or an equivalent method of identifying each lens), and the word "multi-laser" shall be grit blasted, or an equivalent method that shall be permanent and not damage the lenses, in 2 mm high characters on the upper, outside corner of each lens. The identification markings shall not interfere with the optical quality of the lens.

b. If an eye centered design is used, the interpupillary distance (see 6.4.2) shall be indicated on the nose bridge. The side temple arm assemblies shall be marked.

3.6.2 Carrying case. The front flap of the carrying case shall display the following information:

SPECTACLES, AVIATOR'S,
MULTIPLE WAVELENGTH LASER PROTECTIVE, EDU-5/P
MIL-PRF-29580
BALLISTIC RESISTANT - NOT SAFETY GLASSES
MANUFACTURER'S IDENTIFICATION
CONTRACT OR ORDER NUMBER

3.6.3 Caution notice. The following notice shall be printed on white paper and placed in the carrying case with each pair of spectacles.

CAUTION NOTICE

These laser protective spectacles are a hazard/threat countermeasure device. They are designed to protect your eyes from the harmful effects of exposure to multiple laser wavelengths. You can obtain the classified wavelengths and optical density information from:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

Naval Air Warfare Center Aircraft Division
South Engineering Center/Crew Systems
Attn: Vision Laboratory Code 4.6
Bldg., 2187, Suite 1280
48110 Shaw Road, Unit 5
Patuxent River, MD 20670-1906

In order to provide the desired protection, the spectacles must be cared for and used properly. Always keep the spectacles in their case when not being used. To clean the lenses, first remove all dust and dirt with a soft, dry cloth, then clean with a moist cloth or by steaming with breath. Dry lenses with a soft, clean, unimpregnated facial tissue or lint-free cloth. If the spectacles are damaged, do not use them.

Each pair of spectacles is a controlled item and should be disposed of in accordance with designated maintenance manual procedures.

IMPORTANT FOR YOUR SAFETY

THESE SPECTACLES DO NOT PROTECT AGAINST ALL LASERS.

THESE SPECTACLES ARE NOT INTENDED FOR MAINTENANCE PERSONNEL OR PERSONNEL USING MAGNIFYING OPTICS SUCH AS BINOCULARS OR TELESCOPES.

THESE SPECTACLES ARE NOT SUNGLASSES.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).

b. Conformance inspection (see 4.3).

c. Conformance verification inspection (see 4.4).

4.2 First article inspection. First article inspection shall consist of performing tests specified in table II performed on production representative samples after contract award to determine that the production item meets the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

4.2.1 First article samples. Twelve complete pairs of spectacles, two spare frames, and two sets of lens overlay templates shall be provided. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. Approval of the first article samples or the waiving of first article inspection (see 6.2) does not preclude the requirements for performing conformance inspection. First article samples shall be furnished to the Government as directed by the contracting officer (see 6.2).

4.3 Conformance inspection. Conformance inspection shall consist of the tests specified in table III performed on individual products or lots to determine conformance with the requirements of this specification. Nonconformance with any specification requirement shall be cause for rejection of the lot represented by the sample.

4.3.1 Lot formation. An inspection lot size shall be expressed in sample units of spectacles made essentially under the same conditions and from the same materials as the production units. The sample unit shall be one pair of spectacles with carrying case.

4.3.2 Sampling. The sample size and acceptance criteria for the examinations and tests for the spectacles with carrying case shall be as specified in table III.

4.4 Conformance verification inspection. Conformance verification inspection shall consist of performing the tests, specified in table IV in the order listed, on selected products from the lot at a Government approved test facility.

4.4.1 Sampling. Upon successful completion of the conformance inspection (see 4.3), a random sample shall be selected from each lot of spectacles in accordance with Inspection Level S-3 of ASQC-Z1.4. The sample size shall be based only on the applicable sample size code letter corresponding to Inspection Level S-3. Each pair of spectacles selected as a sample unit shall be identified as assigned (see 3.6). The number of sample units selected from the lot shall be furnished to the Government test facility. Nonconformance with any specification requirement shall be cause for rejection of the lot represented by the sample.

4.5 Methods of inspection.

4.5.1 Optical inspection.

4.5.1.1 Matching. Matching of spectacle lenses within their frames, for location of the design eyepoint, prism, and power shall be determined with a telescope, vertometer, lensometer, projection lantern, or any other instrument that can perform this test. The instrument shall include a target which can be brought into sharp focus, as observed through an eyepiece or projected on a screen, and an aperture not greater than 1 cm in diameter, fixed at a definite position along the axis of the optical system. The design of the system shall be such that refractive power in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

principle meridian of the lens placed across the test aperture can be determined to within 0.06 diopter. The spectacle lenses shall meet the requirements specified in 3.4.2.1.

4.5.1.2 Prismatic deviation (optical power).

4.5.1.2.1 Vertical prismatic deviation. The spectacles shall be tested for vertical prismatic deviation using the test method described in 4.5.1.1. Base up prism shall be designated positive (+) and base down prism shall be designated negative (−). The vertical prismatic deviation shall be calculated by determining the algebraic sum and difference between the amount of prism at the design eyepoint of the right lens and the amount of prism at the design eyepoint of the left lens and shall meet the requirements specified in 3.4.2.2.1.

4.5.1.2.2 Horizontal prismatic deviation. The spectacles shall be tested for horizontal prismatic deviation using the method described in 4.5.1.1. Base out prism shall be designated positive (+) and base in prism shall be designated negative (−). The horizontal prismatic deviation shall be calculated by determining the algebraic sum and difference between the amount of prism at the design eyepoint of the right lens and the amount of prism at the design eyepoint of the left lens and shall meet the requirements specified in 3.4.2.2.2.

4.5.1.3 Spherical and cylindrical power. The spectacles shall be tested for spherical and cylindrical power using the method described in 4.5.1.1 and shall meet the requirements specified in 3.4.2.3.

4.5.1.4 Lens defects. The spectacle lenses shall be inspected for irregularities and material defects affecting optical qualities by examining each lens against the NIST Special Publication 374 or NIST Circular 533 high contrast chart or equivalent. The lenses shall meet the requirements specified in 3.4.2.4.

4.5.1.5 Lens fit. The contact area between the frame and lens of the spectacles shall be inspected with a strong, neutral, non-glaring light behind the spectacles. Any visible light between the frame and lens indicates a space exists between the frame and the lens. The spectacles shall meet the requirements specified in 3.4.2.5.

4.5.1.6 Curvature. The outside curvature of the spectacle lenses shall be measured using a Geneva lens measure or equivalent. Three measurements shall be made on each lens to the nearest 0.125 diopter. The outside curvature of the lenses shall meet the requirements specified in 3.4.2.6.

4.5.2 Spectral transmittance inspections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

4.5.2.1 Optical density and angular protection. The optical densities shall be measured at all angles at which incident laser radiation in the specified threat wavelength bands may enter the eye. The calculation for angular protection shall be for an eye with an 8 mm diameter pupil rotated ± 35° with respect to the user's line of sight through the lens. The eye relief (see 6.4.1) shall be not greater than 24 mm. The measurements shall be made with a spectrophotometer, a photometer, lasers of the appropriate wavelengths, or any equivalent method. The densities shall meet the requirements specified in 3.4.3.1.

4.5.2.2 Transmittance. The photopic and scotopic transmittance of the spectacle lenses shall be computed as shown in table V or an equivalent method. The spectacle lenses shall meet the requirements specified in 3.4.3.2.

4.5.2.3 Near-infrared transmittance. The near-infrared transmittance of the spectacle lenses shall be computed as the average of the spectral transmittances at 50 nm steps in the spectral region of 800 to 1200 nm. The spectacle lenses shall meet the requirements specified in 3.4.3.3.

4.5.2.4 Erythermal ultraviolet transmittance. The erythermal ultraviolet transmittance of the spectacle lenses shall be computed by averaging the transmittances at wavelengths of 290, 300, 310, and 320 nm. The spectacle lenses shall meet the requirements specified in 3.4.3.4.

4.5.2.5 Haze. The haze shall be determined in accordance with ASTM-D1003, Procedure A. The spectacle lenses shall meet the requirements specified in 3.4.3.5.

4.5.2.6 Abrasion resistance. The transmittance and haze of the lenses shall be determined, as specified in ASTM-D1003, before and after the abrasion test. The surface abrasion test shall be performed by rubbing with a specially standardized eraser mounted as illustrated on figure 1, and held approximately normal to the lens. The eraser shall be rubbed across the surface of the lens from one point to another, over the same path, for 20 complete cycles with a force of 4.4 to 5.5 kg continuously applied. Wherever possible, rubs of about 25 mm length are preferred. After the rubbing has been completed, the lens shall be thoroughly cleaned to remove dirt, film, fingermarks, and grease marks using a mild detergent and water, followed by drying with a soft cloth or lens tissue. The lens shall meet the requirements specified in 3.4.3.6.

4.5.3 Environmental test.

4.5.3.1 General test performance procedure. Before performing the environmental tests, all the spectacles shall be measured and meet the requirements for lens defects (see 3.4.2.4), optical density (see 3.4.3.1) and transmittance (see 3.4.3.2). Spectacles shall be placed in an environmental chamber to allow adequate circulation around the item. The spectacles shall be placed in the test chamber so that the entire front surface can be photographed from the viewing port without disturbing the sample. A white light source shall be positioned behind the spectacles

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

so that the illumination is uniform throughout. Interruptions during which the prescribed test tolerances are not exceeded shall be considered as part of the total test duration. Videotape records may be substituted wherever photographs are required in the test procedures.

4.5.3.2 Solar radiation. The spectacles shall be placed in a solar simulator (Weatherometer or equivalent). The total incident flux shall be monitored and recorded throughout the exposure. At the completion of each exposure cycle, optical density and angular protection (see 4.5.2.1) and transmittance (see 4.5.2.2) shall be recorded. The exposure test cycle shall be repeated until either the spectacles fail or the equivalent of 312 days of exposure is reached (estimate based on a two-year service life with an average of three missions per week). At test completion, the spectacles shall meet the requirements of lens defects (see 3.4.2.4), optical density and angular protection (see 3.4.3.1), transmittance (see 3.4.3.2), abrasion resistance (see 3.4.3.6), and impact resistance (see 3.4.5).

4.5.3.3 Laser saturation. The spectacle lenses shall be spectrally scanned before and after the laser saturation tests and the results recorded. The lenses shall be exposed to laser energies at the protective wavelengths starting at an intensity below which any bleaching or damage will occur. The intensity shall be increased until reversible saturation (temporary bleaching) or damage to the lenses occurs. The results shall be stated in terms of wavelength and energy density at which bleaching or damage occurs.

4.5.3.4 High temperature. The test sequence as specified below shall be followed:

Step 1 - Prepare the sample in accordance with 4.5.3.1.

Step 2 - Raise the internal chamber temperature to 38 °C (100 °F). Photograph the sample after temperature stabilization.

Step 3 - Maintain the internal temperature at 38 °C (100 °F) for 6 hours. Photograph the sample at the end of 2 hours and at the end of 6 hours.

Step 4 - Raise the internal temperature to 66 °C (151 °F) over a 1 hour time period and maintain that temperature for an additional 4 hours.

a. Photograph the sample after temperature stabilization.

b. Photograph the sample at the end of 2 hours and at the end of 4 hours.

Step 5 - Lower the internal temperature to 38 °C (100 °F) within a 1 hour time period. Photograph the sample after temperature stabilization.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

Step 6 - Repeat steps 3, 4, and 5 two additional times.

Following the high temperature test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

4.5.3.5 Low temperature. The test sequence as specified below shall be followed:

Step 1 - Prepare the sample in accordance with paragraph 4.5.3.1.

Step 2 - Lower the internal chamber temperature to the storage temperature of –51 °C (–60 °F) and maintain that temperature for a period of 24 hours after stabilization.

a. Photograph the sample after temperature stabilization.

b. Photograph the sample at 2 hour intervals for the remainder of the 24 hour period.

Step 3 - Return the sample to standard ambient conditions and stabilize. Photograph the sample after temperature stabilization.

Following the low temperature test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

4.5.3.6 Temperature shock. The test sequence as specified below shall be followed:

Step 1 - Prepare the sample in accordance with 4.5.3.1.

Step 2 - Raise the internal chamber temperature to 66 °C (151 °F). Maintain that temperature for a period of not less than 4 hours.

a. Photograph the sample after temperature stabilization.

b. Photograph the sample at the end of 2 hours and at the end of 4 hours.

Step 3 - Transfer the sample within 5 minutes to a cold chamber with an internal temperature of –51 °C (–60 °F). Expose the sample to this temperature for a period of not less than 4 hours.

a. Photograph the sample within 5 minutes of placement in the cold chamber.

b. Photograph the sample at the end of 2 hours and at the end of 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

Step 4 - Return the sample within 5 minutes to the high temperature chamber. The sample shall be exposed to this temperature for a period of 4 hours.

a. Photograph the sample as soon as it defrosts.

b. Photograph the sample at the end of 2 hours and at the end of 4 hours.

Step 5 - Repeat step 3.

Step 6 - Repeat step 4.

Step 7 - Return the sample to standard ambient conditions and stabilize. Photograph the sample after temperature stabilization.

Following the temperature shock test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

4.5.3.7 Rain. The test sequence as specified below shall be followed:

Step 1 - Prepare the sample in accordance with 4.5.3.1.

Step 2 - The water temperature shall be 25 ±10 °C (77 ±18 °F).

Step 3 - The spectacles shall be preheated to 10 °C (17 °F) higher than the water temperature.

Step 4 - The chamber temperature shall be uncontrolled except as regulated by the water temperature.

Step 5 - Photograph the sample prior to rain exposure.

Step 6 - The entire outer surface of the lenses shall be exposed to the rain.

Step 7 - Expose the sample for 2 hours of blowing rain.

Step 8 - Photograph the sample at the half-way point of the exposure time.

Step 9 - Photograph the sample at the end of the test after the droplets have evaporated from the surface of the sample.

Following the rain test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

4.5.3.8 Humidity. Ensure that the wiper on the viewing port clears the surface to enable the quality of pictures required. The modified hot humid cycle listed in table VI shall be used for testing with a test duration of 10 days (non-hazardous items). The relationship of temperature to relative humidity is shown on figure 2. Temperatures may vary ± 25 °C (± 5 °F). The points at which the sample shall be photographed are indicated on the temperature function with a vertical line from the x-axis. There are a total of seven photographs per 24 hour period at key transition points. This schedule of photographs shall result in a total of 70 pictures over the 10-day test period. The test sequence as specified below shall be followed:

Step 1 - Prepare the sample in accordance with 4.5.3.1.

Step 2 - Place the sample in the chamber and stabilize the chamber to the first condition in table VI. Photograph the sample after temperature/humidity stabilization.

Step 3 - Following table VI, the test shall be performed for 10 days. Photograph the sample at the points indicated on the temperature function on figure 2 (1 through 7).

Following the humidity test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

4.5.3.8.1 Adhesion of coating. Immediately upon completion of the humidity test and removal from the humidity chamber, the lenses shall be dried with a cotton cloth and then subjected to the adhesion test. A test tape, with an adhesion rating of 1.1 kg per 25 mm of width (40 ounces per inch of width) shall be firmly applied to the front surface of the lens. The area covered shall be 25 by 12.5 mm (1 inch by 0.5 inch). The tape shall then be removed using a snapping motion applied at 90° to the surface of the lens. Two trials at separate locations shall be made using this method. The following 3M tapes are acceptable: 670 (preferred), 202, 218, and 232. The tested areas shall be closely examined. The spectacles shall meet the requirements specified in 3.4.4.6.1. Suggested sources of tapes is located in 6.5.2.

4.5.3.9 Salt fog resistance. The spectacles shall be tested in accordance with 4.5.3.1 and the procedure outlined below. The salt used for this test shall be sodium chloride containing (on a dry basis) not more then 0.1 percent sodium iodide and not more than 0.5 percent total impurities. A 5 ± 1 percent solution shall be prepared by dissolving 5 parts by weight of salt in 95 parts by weight of water. The solution shall be adjusted to, and maintained at a specific gravity (see figure 3) by using the measured temperature and density of the salt solution. Sodium tetraborate (Borax) may be added to the salt solution as a pH stabilization agent in a ratio not to exceed 0.7g sodium tetraborate to 75 liters of salt solution. The pH of the salt solution as collected as fallout in the exposure chamber shall be maintained between 6.5 and 7.2 with the solution temperature at +35 °C (+95 °F). Only diluted chemically pure hydrochloric acid or chemically pure sodium hydroxide shall be used to adjust the pH. The pH measurement shall be made electrometrically or colorimetrically.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

Step 1 - Prepare the spectacles in accordance with 4.5.3.1.

Step 2 - Adjust the test chamber temperature to 35 °C (95 °F).
Photograph the spectacles.

Step 3 - After the introduction of salt fog, the spectacles shall remain in the chamber for 48 hours.

Step 4 - Remove the spectacles from the chambers.
Wash and photograph the spectacles.

Step 5 - The spectacles shall be stored at ambient temperature for 48 hours.
Photograph the spectacles at the end of this period.

Following the salt fog resistance test, the spectacles shall meet the requirements of 3.4.2 and 3.4.3.

4.5.4 Impact resistance. A 16-mm steel ball weighing approximately 16 grams shall be dropped from a height of 1270 mm on the upper horizontal surface of the lens. The steel ball shall strike within the geometric center of the lens. The lens itself shall be supported by a rigid acrylic plastic or steel tube 25 ±3 mm on the inside diameter, 32 ±3 mm on the outside diameter, and approximately 25 mm in height. The lens support tube shall be affixed to a rigid iron or steel base plate. Total weight of the base plate and fixtures shall be not less than 12.2 kg. The top edge of the tube shall have a securely bonded 3 by 3 mm neoprene gasket having a hardness of 40 ±5 as specified in ASTM-D1415 and a minimum tensile strength of 8.3 MPa as specified in ASTM-D412, with a minimum ultimate elongation of 400 percent as specified in ASTM-D412. The diameter of the lens support may be modified so that the neoprene gasket may support the lens at its periphery. The ball may be guided in its free fall by being dropped through a tube, extending to within 100 mm of the lens. The lens shall meet the requirements specified in 3.4.5.

4.5.5 Frame.

4.5.5.1 Corrosion resistance. When the spectacles are subjected to the salt fog resistance test of 4.5.3.9, the frame shall meet the requirements specified in 3.4.6.1.

4.5.5.2 Heat resistance. When the spectacles are subjected to the temperature shock test of 4.5.3.6, the frame shall meet the requirements specified in 3.4.6.2.

4.5.5.3 Ductility. The temple of the spectacles shall be bent 45° (once) over a 6 mm (0.25 inch) mandrel. The temple shall meet the requirements specified in 3.4.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

4.5.5.4 Adhesion of plating. Adhesion of test articles shall be performed at room temperature by means of the following bend test. Plated temples shall be bent repeatedly through an angle of 180° on a diameter equal to the thickness of the temple until fracture of the base material occurs. No detachment of the coating shall be possible by probing with a sharp instrument. Cracks in the base metal or plating shall not be considered failure unless accompanied by flaking, peeling, or blistering. The temple shall meet the requirements specified in 3.4.6.4.

4.5.6 Crush resistance of carrying case. The carrying case with the spectacles inside, in the closed position, shall be placed on a flat surface. A force of 13.3 kg (29 pounds) shall then be applied over a circular area of 160 mm^2 (6 square inches) on the face of the closed case over the center of each lens. The carrying case shall meet the requirements specified in 3.3.3.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The spectacles are for use by aircrew members for eye protection against exposure to multiple laser wavelengths, generated by military weapons systems.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of the specification.

b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2 and 2.3).

c. The applicable wavelengths and the required optical densities may be obtained upon submission of a request accompanied by a secret clearance (see 3.4.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

d. The number of first article samples required are to be included (see 4.2.1).

e. Whether first article inspection is required (see 4.2.1).

f. Name and address of the first article inspection test facility to which first article samples are to be forwarded (see 4.2.1) and the name and address of the Government activity responsible for conducting the first article inspection program (see 6.3).

g. Name and address of the conformance verification inspection test facility to which conformance verification samples are to be forwarded (see 4.4.1) and the name and address of the Government activity responsible for conducting the conformance verification inspection program.

h. Packaging requirements (see 5.1).

6.3 First article. When first article inspection is required, the spectacles should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first article samples. Invitations for bids should state that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.4 Definitions.

6.4.1 Eye relief. The distance from the rear surface of the spectacle lens to the cornea.

6.4.2 Interpupillary distance. For spectacles is the distance between the center of the user's pupils measured in millimeters (mm).

6.5 Suggested sources.

6.5.1 Eraser abrasion tester assembly and eraser plug.

Summers Lab Inc.
P.O. Box 162
Fort Washington, PA 19034

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

6.5.2 Adhesion test tapes.

3M Industrial Tape and Specialties Division
Bldg., 230-1E-04
3M Center
St. Paul, MN 55144-1000

6.6 Subject term (key word) listing.

Eye protection
Laser eye protection (LEP)
Laser radiation
Lenses
Optical
Optical density

6.7 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

6.8 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE I. Defects for visual and dimensional examination of the spectacles with carrying case.

ITEM	DEFECT
Lens	Any material imperfections that adversely affect the level of protection or the visual properties.
Frame	Identification or size information missing, if required.
Construction and workmanship	Component missing or damaged. Any burr or sharp edge that may cause injury. Visible space between the lens and frame.
Carrying case	Case missing. Any component missing or damaged that would diminish protection to contents.
Markings	
Lens	Missing, misspelled, illegible, or incorrect.
Frame	Missing, misspelled, illegible, or incorrect.
Carrying case	Missing, misspelled, illegible, or incorrect.
Caution notice	Missing - not included in carrying case. Not worded as specified in paragraph 3.6.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE II. First article inspection.

Inspection	Requirement Paragraph	Test Paragraph
Visual and dimensional examination	3.4.1	
Matching	3.4.2.1	4.5.1.1
Vertical prismatic deviation	3.4.2.2.1	4.5.1.2.1
Horizontal prismatic deviation	3.4.2.2.2	4.5.1.2.2
Spherical and cylindrical power	3.4.2.3	4.5.1.3
Lens defects	3.4.2.4	4.5.1.4
Lens fit	3.4.2.5	4.5.1.5
Curvature	3.4.2.6	4.5.1.6
Optical density and angular protection	3.4.3.1	4.5.2.1
Transmittance	3.4.3.2	4.5.2.2
Near-infrared transmittance	3.4.3.3	4.5.2.3
Erythermal ultraviolet transmittance	3.4.3.4	4.5.2.4
Haze	3.4.3.5	4.5.2.5
Abrasion resistance	3.4.3.6	4.5.2.6
Solar radiation	3.4.4.1	4.5.3.2
Laser saturation	3.4.4.1	4.5.3.3
High temperature	3.4.4.2	4.5.3.4
Low temperature	3.4.4.3	4.5.3.5
Temperature shock	3.4.4.4	4.5.3.6
Rain	3.4.4.5	4.5.3.7
Humidity	3.4.4.6	4.5.3.8
Adhesion of coating	3.4.4.6.1	4.5.3.8.1
Salt fog resistance	3.4.4.7	4.5.3.9
Impact resistance	3.4.5	4.5.4
Corrosion resistance (frame)	3.4.6.1	4.5.5.1
Heat resistance (frame)	3.4.6.2	4.5.5.2
Ductility (frame)	3.4.6.3	4.5.5.3
Adhesion of plating (frame)	3.4.6.4	4.5.5.4
Crush resistance of carrying case	3.3.3	4.5.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE III. Conformance inspection.

Inspection	Test Paragraph	Sample Size	Acceptance Criteria
Visual and dimensional examination		a. Every pair of spectacles for critical defects. b. Inspection Level II for minor defects.	No defects
Matching	4.5.1.1	Inspection Level III 1/	No defects
Vertical prismatic deviation	4.5.1.2.1	Inspection Level III 1/	No defects
Horizontal prismatic deviation	4.5.1.2.2	Inspection Level III 1/	No defects
Spherical and cylindrical power	4.5.1.3	Inspection Level III 1/	No defects
Lens defects	4.5.1.4	Inspection Level III 1/	No defects
Lens fit	4.5.1.5	Inspection Level III 1/	No defects
Curvature	4.5.1.6	Inspection Level III 1/	No defects
Optical density and angular protection	4.5.2.1	Inspection Level III 1/	No defects
Transmittance	4.5.2.2	Inspection Level III 1/	No defects
Near-infrared transmittance	4.5.2.3	Inspection Level III 1/	No defects
Erythermal ultraviolet transmittance	4.5.2.4	Inspection Level III 1/	No defects
Haze	4.5.2.5	Inspection Level III 1/	No defects

1/ The sample size shall be based only on the applicable sample size code letter corresponding to the specified inspection level of ASQC-Z1.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE IV. Conformance verification inspection.

Inspection	Requirement Paragraph	Test Paragraph
Visual and dimensional examination	3.4.1	
Prismatic deviation (optical power)	3.4.2.2	4.5.1.2
Optical density and angular protection	3.4.3.1	4.5.2.1
Transmittance	3.4.3.2	4.5.2.2
Erythermal ultraviolet transmittance	3.4.3.4	4.5.2.4
Haze	3.4.3.5	4.5.2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE V. Calculating photopic and scotopic transmittance.

Wavelength	Vλ	Vλ´	**T**	Vλ×T	Vλ´×T
380	.0000	.00059	**.0000**	.0000	.0000
385	.0001	.00111	**.0000**	.0000	.0000
390	.0001	.00221	**.0000**	.0000	.0000
395	.0002	.00453	**.0000**	.0000	.0000
400	.0004	.00929	**.0000**	.0000	.0000
405	.0006	.01850	**.0000**	.0000	.0000
410	.0012	.03484	**.0000**	.0000	.0000
415	.0022	.06040	**.0000**	.0000	.0000
420	.0040	.09660	**.0000**	.0000	.0000
425	.0073	.14360	**.0000**	.0000	.0000
430	.0116	.19980	**.0000**	.0000	.0000
435	.0168	.26250	**.0000**	.0000	.0000
440	.0230	.32810	**.0000**	.0000	.0000
445	.0298	.39310	**.0000**	.0000	.0000
450	.0380	.45500	**.0000**	.0000	.0000
455	.0480	.51290	**.0000**	.0000	.0000
460	.0600	.56720	**.0000**	.0000	.0000
465	.0739	.62050	**.0000**	.0000	.0000
470	.0910	.67560	**.0000**	.0000	.0000
475	.1126	.73370	**.0000**	.0000	.0000
480	.1390	.79300	**.0000**	.0000	.0000
485	.1693	.85090	**.0001**	.0000	.0001
490	.2080	.90430	**.0000**	.0000	.0000
495	.2586	.94910	**.0000**	.0000	.0000
500	.3230	.98170	**.0000**	.0000	.0000
505	.4073	.99840	**.0000**	.0000	.0000
510	.5030	.99660	**.0000**	.0000	.0000
515	.6082	.97500	**.0000**	.0000	.0000
520	.7100	.93520	**.0000**	.0000	.0000
525	.7932	.87960	**.0000**	.0000	.0000
530	.8620	.81100	**.0000**	.0000	.0000
535	.9149	.73320	**.0004**	.0004	.0003
540	.9540	.64970	**.0037**	.0035	.0024
545	.9803	.56440	**.0221**	.0217	.0125
550	.9950	.48080	**.0710**	.0706	.0341
555	1.0002	.40150	**.1437**	.1437	.0577
560	.9950	.32880	**.2129**	.2118	.0700
565	.9786	.26390	**.2608**	.2552	.0688
570	.9520	.20760	**.2889**	.2750	.0600
575	.9154	.16020	**.3014**	.2759	.0483

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE V. Calculating photopic and scotopic transmittance - Continued.

Wavelength	Vλ	Vλ´	**T**	Vλ×T	Vλ´×T
580	.8700	.12120	**.3016**	.2624	.0366
585	.8163	.08990	**.2915**	.2380	.0262
590	.7570	.06550	**.2763**	.2092	.0181
595	.6949	.04690	**.2596**	.1804	.0122
600	.6310	.03325	**.2384**	.1504	.0079
605	.5668	.02312	**.2118**	.1200	.0049
610	.5030	.01593	**.1775**	.0893	.0028
615	.4412	.01088	**.1394**	.0615	.0015
620	.3810	.00737	**.1055**	.0402	.0008
625	.3210	.00497	**.0822**	.0264	.0004
630	.2650	.00334	**.0677**	.0179	.0002
635	.2170	.00224	**.0577**	.0125	.0001
640	.1750	.00150	**.0492**	.0086	.0001
645	.1382	.00101	**.0416**	.0057	.0000
650	.1070	.00068	**.0347**	.0037	.0000
655	.0816	.00046	**.0278**	.0023	.0000
660	.0610	.00031	**.0207**	.0013	.0000
665	0446	.00021	**.0141**	.0006	.0000
670	.0320	.00015	**.0083**	.0003	.0000
675	.0232	.00010	**.0039**	.0001	.0000
680	.0170	.00007	**.0015**	.0000	.0000
685	.0119	.00005	**.0005**	.0000	.0000
690	.0082	.00004	**.0002**	.0000	.0000
695	.0057	.00003	**.0001**	.0000	.0000
700	.0041	.00002	**.0000**	.0000	.0000
705	.0029	.00001	**.0000**	.0000	.0000
710	.0021	.00000	**.0000**	.0000	.0000
715	.0015	.00000	**.0000**	.0000	.0000
720	.0010	.00000	**.0000**	.0000	.0000
725	.0007	.00000	**.0000**	.0000	.0000
730	.0005	.00000	**.0000**	.0000	.0000
735	.0004	.00000	**.0000**	.0000	.0000
740	.0003	.00000	**.0000**	.0000	.0000
745	.0002	.00000	**.0000**	.0000	.0000
750	.0001	.00000	**.0001**	.0000	.0000
755	.0001	.00000	**.0000**	.0000	.0000
760	.0001	.00000	**.0001**	.0000	.0000
TOTALS	21.3714	19.41420		2.6886	.4659

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE V. Calculating photopic and Scotopic transmittance - Continued.

NOTES:

1. The numbers in bold type shall be replaced by measurements made on the device under test.

2. The following example is for a multiple-wavelength laser protection.

Symbols:

V_λ = Photopic relative luminosity (CIE 1924 standard)
V_λ' = Scotopic relative luminosity (CIE 1924 standard)
T = Transmittance of device under test (bold type)
T_p = Percent photopic transmittance
T_s = Percent scotopic transmittance

Example:

1. Multiply V_λ by T at each wavelength.

2. Multiply V_λ' by T at each wavelength.

3. Obtain separate totals for the numbers in $V_\lambda \times T$, V_λ, $V_\lambda' \times T$, and V_λ' columns.

4. Sum of $V_\lambda \times T$ divided by sum of V_λ is the photopic transmittance. Multiply this by 100 to get percent: $T_p = 2.69/21.3 \times 100 = 12.6\%$.


5. Sum of $V_\lambda' \times T$ divided by V_λ' is the scotopic transmittance. Multiply this by 100 to get percent: $T_s = .466/19.41 \times 100 = 2.4\%$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

TABLE VI. Modified hot humid cycle.

Time	Temperature (°F)	Temperature (°C)	Relative Humidity (%)
0000	88	31	100
0100	88	31	100
0200	88	31	100
0300	88	31	100
0400	88	31	100
0500	88	31	100
0600	90	32	100
0700	93	34	94
0800	96	36	88
0900	98	37	82
1000	100	38	79
1100	102	39	77
1200	104	40	75
1300	105	41	74
1400	105	41	74
1500	105	41	74
1600	105	41	76
1700	102	39	79
1800	99	37	82
1900	97	36	86
2000	94	34	91
2100	91	33	95
2200	90	32	96
2300	89	32	100
2400	88	31	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

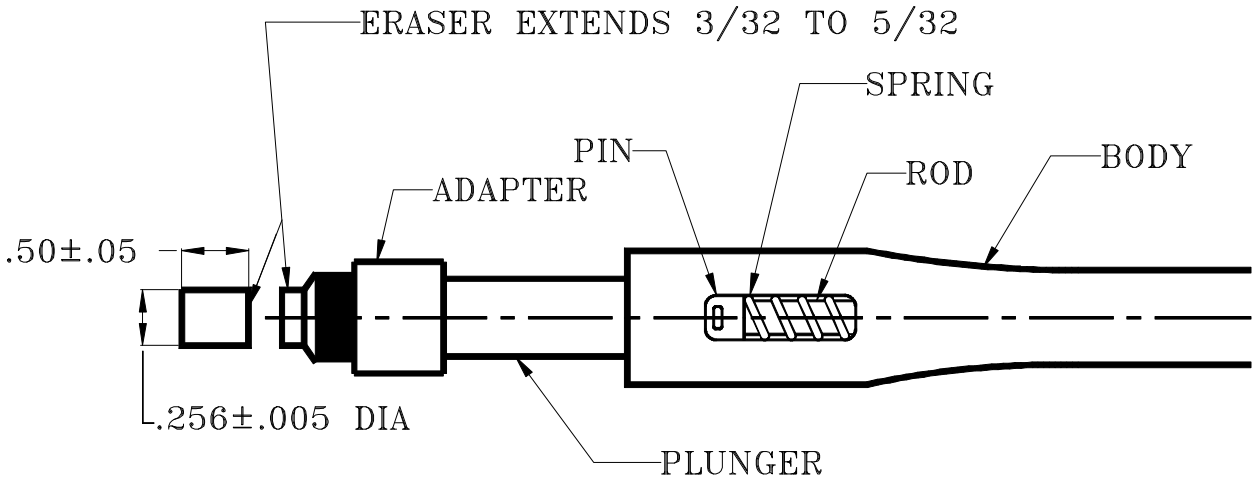

NOTES:

1. Dimensions are in inches.

FIGURE 1. Eraser abrasion tester assembly and eraser plug.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

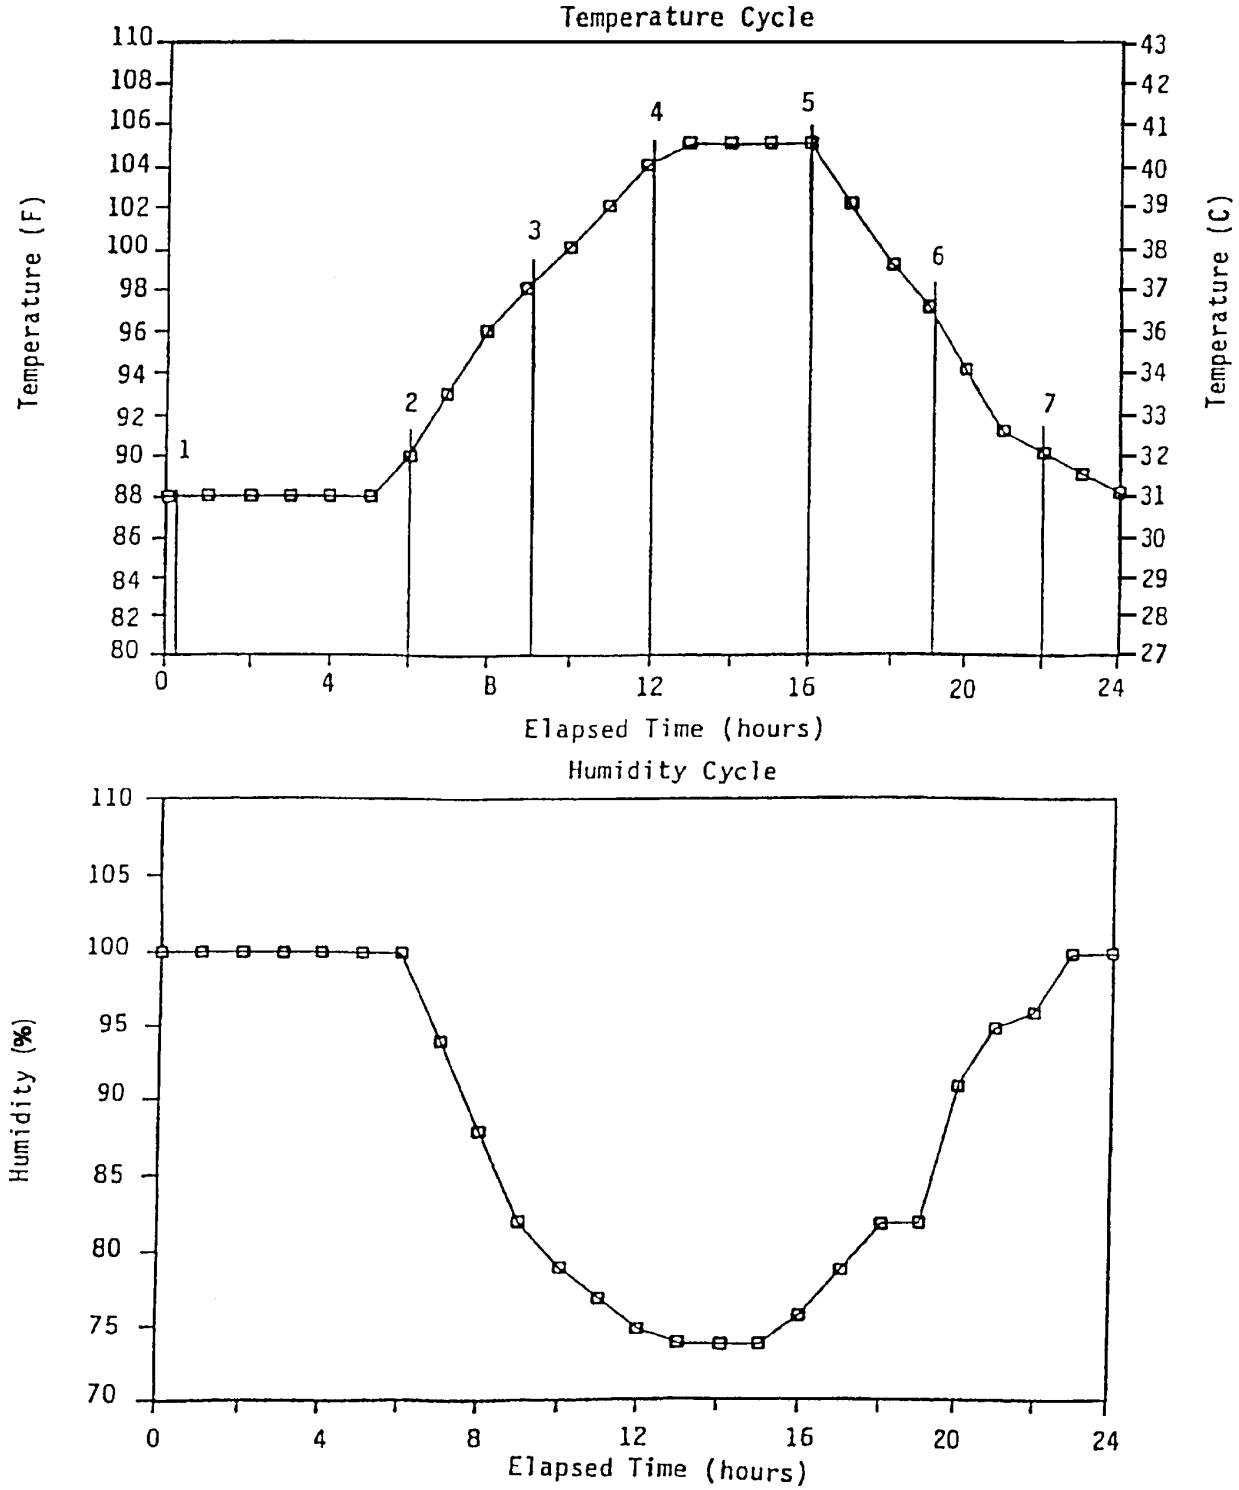


FIGURE 2. Modified hot humid cycle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

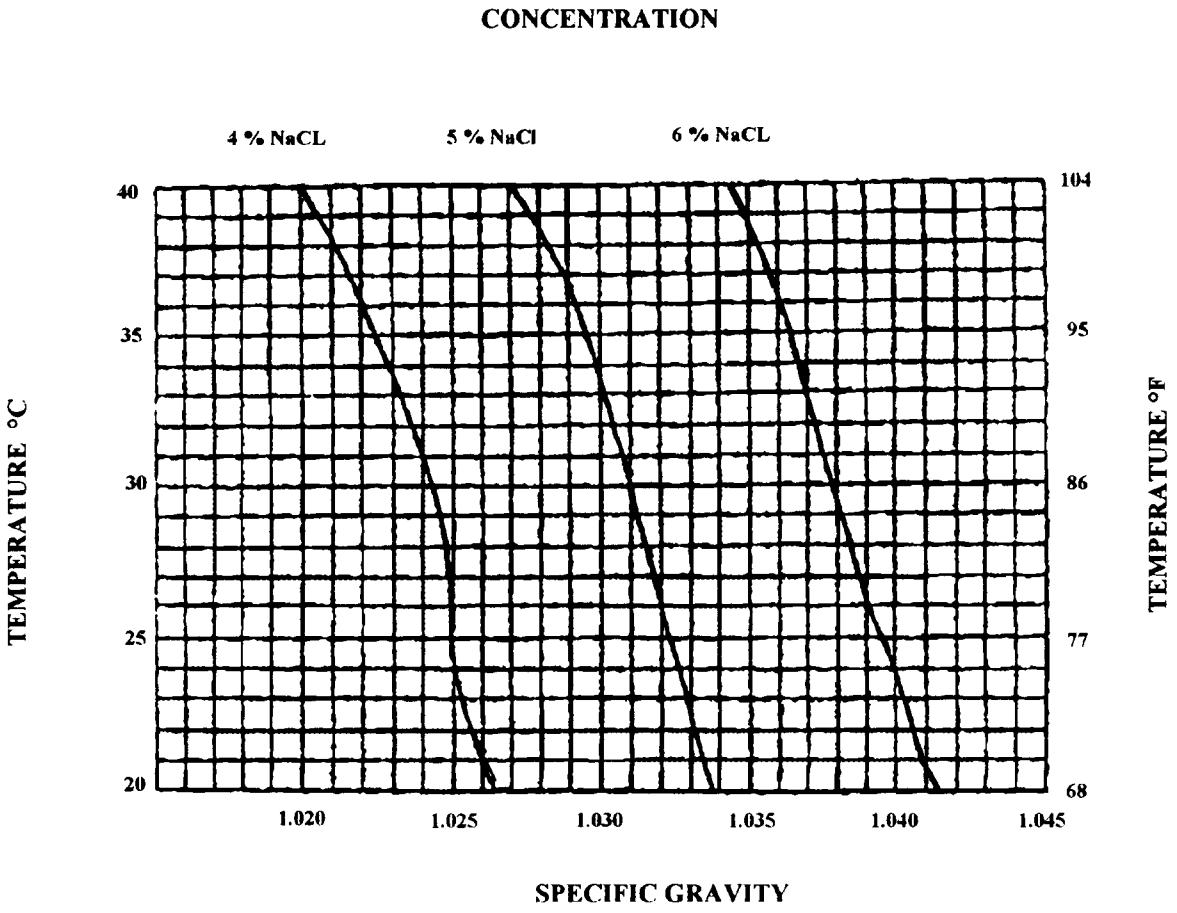


Figure 3. Variations of specific gravity of salt (NaCl) solution with temperature.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - GL
Navy - AS

Preparing activity:
Navy - AS
(Project 8465-0254)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.
   NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-29580C	2. DOCUMENT DATE (*YYMMDD*) 980917

3. DOCUMENT TITLE
SPECTACLES, AVIATOR'S, MULTIPLE WAVELENGTH LASER PROTECTIVE, EDU-5/P (WITH CASE)

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial: (2) DSN: (*If Applicable*)	7. DATE SUBMITTED (*YYMMDD*)

8. PREPARING ACTIVITY

a. NAME COMMANDER NAVAL AIR WARFARE CENTER AIRCRAFT DIVISION	b. TELEPHONE NUMBER (*Include Area Code*) (1) Commercial: (732) 323-2947 (2) DSN: 624-2947
c. ADDRESS (*Include Zip Code*) CODE 414100B120-3 HIGHWAY 547 LAKEHURST, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Logistics Agency (DLSC-LM), Attn: Carla Jenkins/John Tascher 8725 John J. Kingman Road, Ste 2533 Fort Belvoir, VA 22060-6221 Telephone (703) 767-6874

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:09Z
Check the source to verify that this is the current version before use.