|INCH-POUND|
MIL-R-29565A(AS)
30 November 1990
SUPERSEDING
MIL-R-29565(AS)
6 October 1988

MILITARY SPECIFICATION

ROCKET MOTOR, MK 125 MOD 1

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the minimum requirements for the manufacture, test, and acceptance of the Mk 125 Mod 1 Rocket Motor.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks, form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specification and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-T-60	Tape, Packaging, Waterproof
PPP-C-1120	Cushioning Material, Uncompressed Bound Fiber for Packaging

MILITARY

MIL-P-116	Preservation, Methods of
MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidication
MIL-B-81705	Barrier Materials, Flexible, Electrostatic-Free, Heat Sealable

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD) Code 53, Lakehurst, NJ 08733-5100, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1340

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-414	Sampling Procedures and Tables for Inspection by Variables for Percent Defective
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1167	Ammunition Data Card
MIL-STD-1168	Ammunition Lot Numbering
MIL-STD-45662	Calibration Systems Requirements
MS20995	Wire, Safety or Lock
MS24347	Drums, Metal, Reusable Shipping ang Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

NAVAL AIR SYSTEMS COMMAND

1777AS200	Motor, Rocket MK 125 MOD 1

(Unless otherwise indicated, copies are available from the Commanding Officer Naval Ordnance Station (Code 3720), Indian Head MD 20640-5000.)

PUBLICATIONS

CODE OF FEDERAL REGULATIONS

14 CFR 49	Aeronautics and Space
46 CFR 146	Shipping
49 CFR 100-199	Transportation

(Copies are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS (see 6.3)

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.3.

3.2 Conformance to documents. The rocket motor shall conform to the requirements of this specification and all the requirements of Drawing 1777AS200 (see 4.4.)

3.3 Finish. All components shall be free from burrs and contamination which could result in malfunction of the equipment or be a safety hazard (see 4.5.1).

3.4 Rocket motor chamber. The rocket motor chamber shall not leak or exhibit permanent deformation as a result of rocket motor operation (see 4.5.2).

3.5 Propellant grain. No propellant grain cracks, separations (propellant-to-liner or liner-to-case), or fissures are permitted. A maximum of three voids having any dimension up to and including 1/8 inch are permitted if separated from each other by a minimum of 1 inch. Smaller voids are permitted if the distance from similar voids are greater than four times the larger void diameter (see 4.5.3).

3.6 Leakage. Rocket motor assemblies shall not leak at a rate of more than 6.102×10^{-5} in^3/s of helium (see 4.5.4).

3.7 Circuit resistance. The rocket motor ignition circuit resistance shall be between 0.45 and 0.60 ohms (see 4.5.5).

3.8 Environmental resistance requirements. The Mk 125 Rocket Motor shall meet the performance requirements of 3.9 after exposure to the environmental tests of 4.5.6.

3.9 Performance requirements. All first article rocket motors subjected to ballistic test shall meet the performance requirements specified in table I. All conformance test rocket motors subjected to ballistic test shall be statistically analyzed using the requirements specified in 4.4.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

TABLE I. Performance requirements.

Parameter	Test temperature (°F)	
	-40	140
Total impulse (lbf-s) minimum	1740	1770
Burn time (s)		
maximum	2.5	2.1
minimum	2.1	1.6
Ignition delay (s)		
maximum	0.020	0.020
Thruster delay (s)		
maximum	2.1	2.1
minimum	0.7	0.7
Thruster force (lbf)		
maximum	750	750
minimum	650	650
Maximum thrust (lbf)	950	1360
Thrust angle (degrees)		
maximum	27	27
minimum	24	24
Thrust angle change (degrees)	2	2

3.9.1 Test instrumentation. Test instrumentation capability shall be as specified below. Calibration records of all test equipment shall be made available to the acquiring activity upon request (see 4.6.3).

Parameter	Accuracy
a. Thrust	±5.0%
b. Time	±0.001 second
c. Temperature	±5°F
d. Minimum frequency response	680 Hz
e. Pressure	±1.0%

3.9.2 Test firing. The rocket motor shall meet the following criteria during the test firing (see 4.6.4):

a. No component shall be ejected
b. No component subject to loading shall yield or fail
c. No burn through or high degree of asymmetric nozzle erosion
d. No hot spot on motor case or head cap shall occur

3.10 Production lot designation. The lot number shall identify the following (see 4.4.1):

a. Manufacturer's CAGE Code
b. The month and year the oldest batch of propellant in the rocket motor lot was cast
c. Lot sequence number

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

3.11 Workmanship. Workmanship shall be that required by the best industrial practices governing the quality production of interchangeable parts for maintaining the dimensions, finishes, tolerances, and quality specified herein and on the applicable drawings (see 4.3 and 4.4).

4. QUALITY ASSURANCE PROVISIONS (see 6.3)

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless dissapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)
b. Quality conformance inspection (see 4.4)

4.3 First article inspection. First article inspection shall be performed by the contractor after award of contract or major change in process or facilities and prior to production, at a location acceptable to the acquiring activity. First article inspection shall be performed on units which have been produced with equipment and procedures intended for use in production (see 6.3). The acquiring activity reserves the right to monitor first article inspection.

4.3.1 Sample size. Twelve rocket motors shall be subjected to the first article inspection.

4.3.2 Inspection routine. The rocket motors shall undergo the inspections and tests specified in table II. The rocket motors shall be subjected to the environmental resistance tests in the sequence shown in table III. The rocket motors shall be leak tested and radiographically inspected before the first environmental treatment and after each subsequent environmental treatment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

TABLE II. First ariticle test.

Inspection or test	Requirement	Test
Visual inspection	3.3	4.5.1
Hydrostatic proof	3.4	4.5.2
Radiographic inspection	3.5	4.5.3
Leak test	3.6	4.5.4
Circuit resistance test	3.7	4.5.5
Environmental test	3.8	4.5.6
Ballistic test	3.9	4.6

TABLE III. Environmental test matrix. 1/

Treatment or test	1	2	3	4	5	6	7	8	9	10	11	12
High temperature			A	A	A	A			A	A		
Thermal shock					B	B	A	A			A	A
Salt fog					C	C						
Vibration												
at -40°F					D				B		B	
at 140°F						D				B		B
Drop												
at -40°F, head end					E							
at 140°F, nozzle end						E						
Ballistic test												
at -40°F	A		B		F		B		C		C	
at 140°F		A		B		F		B		C		C

1/ Letters denote sequence.

4.3.3 Failures. Failure of any rocket motor shall be cause for first article rejection.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the tests and inspection listed in table IV (see 6.3).

TABLE IV. Quality conformance tests.

Inspection or test	Requirement	Test
Visual inspection	3.3	4.5.1
Hydrostatic proof	3.4	4.5.2
Radiographic inspection	3.5	4.5.3
Circuit resistance test	3.7	4.5.5
Ballistic performance	3.9	4.6

4.4.1 Serialization. Each rocket motor shall be identified by a lot number and a unique serial number in accordance with MIL-STD-1168 (see 6.2).

4.4.2 Nondestructive inspection and test sample. Unless otherwise specified in the applicable test method, sampling for nondestructive tests shall be 100%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

4.4.3 Ballistic test sample. Ballistic test samples shall be selected by the Government acquiring activity for test firing after completion of the production lot. The ballistic test sample shall be as equally divided as possible among propellant batches.

4.4.3.1 Ballistic test sample evaluation. The ballistic test sample size for individual lots shall be in accordance with MIL-STD-414, reduced sampling plan, inspection level II, for each temperature tested except that as many batches as possible must be represented at each temperature extreme. The ballistic data shall be evaluated and accepted in accordance with MIL-STD-414, standard deviation method, single or double specification limit (as applicable), variability unknown with an AQL of 1.0%.

4.5 Nondestructive test methods (see 6.3).

4.5.1 Visual inspection. Each rocket motor component and assembly shall be visually inspected for conformance to drawings and workmanship.

4.5.2 Hydrostatic proof test. Each rocket motor chamber shall be hydrostatically tested to 2630 ± 100 lb/in^2. A high pressure pump capable of filling the chamber with an incompressible fluid to 2630 ± 100 lb/in^2 shall be used to perform the test.

4.5.3 Radiographic inspection. Each propellant grain shall be radiographically inspected for defects in accordance with MIL-STD-453, quality level II. Unless otherwise specified herein, the units shall be radiographed in two views 90° apart. The 0° reference plane shall be perpendicular to the rocket motor thruster.

4.5.4 Leak test. Twelve rocket motor assemblies for first article inspection shall be inspected for evidence of leakage using one of the methods described below.

4.5.4.1 Vacuum bomb. The rocket motor shall be placed in a closed bomb. The bomb shall be evacuated to -5 ± 1.0 psig for 25 minutes. The bomb shall then be pressurized to 14.7 ± 1.0 psig with helium gas for 10 minutes. The bomb pressure shall be reduced to ambient and the rocket motor removed to inspect for leakage. The rocket motor shall be placed in a leak detector capable of inspecting for leaks at 0.0 ± 1.0 psig.

4.5.4.2 Internal pressurization. The interior of the rocket motor shall be pressurized to 14.7 ± 1.0 psig with helium and be inspected for evidence of leakage in a leak detector capable of inspecting for leaks at 0.0 ± 1.0 psig.

4.5.5 Circuit resistance. Each rocket motor circuit shall be tested with a low current ohmmeter (10 milliamperes maximum) typical of ordnance operations.

4.5.6 Environmental resistance.

4.5.6.1 High temperature storage. Six rocket motors, in their storage configuration (see 6.5.6), shall be placed in a conditioning chamber at 140°F for 42 days in accordance with MIL-STD-810, Method 501.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

4.5.6.2 Thermal shock. Six rocket motors, in their storage configuration (see 6.5.6), shall be conditioned to 140°F for not less than 5 hours. After this period, the rocket motor shall be transferred to a chamber conditioned to -40°F for 5 hours. Maximum transfer time is 5 minutes. The forementioned series of temperature conditioning is one thermal shock cycle. The contractor shall perform three complete thermal shock cycles on the rocket motor as shown on figure 1.

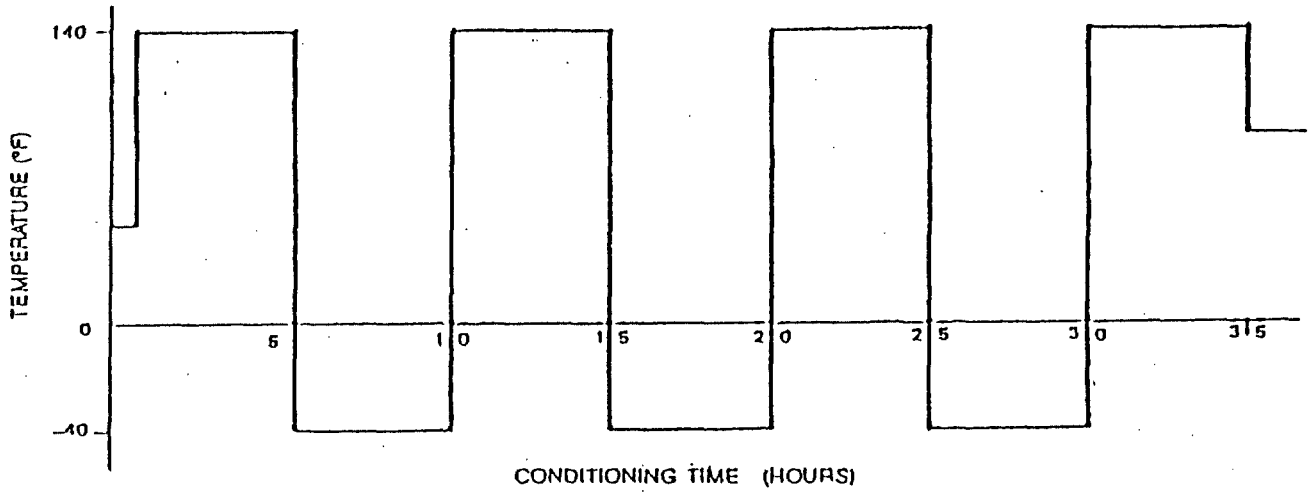


FIGURE 1. Thermal shock cycle.

4.5.6.3 Salt fog. Two rocket motors, in their operational ready configuration (see 6.5.7), shall be subjected to an aqueous salt atmosphere in accordance with MIL-STD-810, Method 509.3. Test duration shall be 48 hours. After exposure, the test items shall be allowed to dry for 48 hours under ambient conditions.

4.5.6.4 Vibration. Six rocket motors, in their shipping configuration (see 6.5.5) and palletized, shall be subjected to category 1, Basic Transportation Vibration, Method 514.4 schedules defined by figures 514.4-1 through 514.4-3 of MIL-STD-810. Rocket motors shall be maintained at the temperature specified in table III.

4.5.6.5 Drop test. Two rocket motors, in their operational ready configuration (see 6.5.7), shall be dropped from a height of 2 feet measured from the lowest point of the rocket motor to the impact surface. One motor shall be dropped on its nozzle end, and one motor shall be dropped on its forward end, with the motor in a vertical position. The impact surface shall be a steel plate (not less than 1-inch thick) embedded in reinforced concrete. The rocket motor shall be thermally conditioned to the temperature specified in table III.

4.6 Ballistic test.

4.6.1 Temperature conditioning. Rocket motors scheduled for static firing shall be thermally conditioned for a minimum of 5 hours to the temperatures in accordance with table III for first article inspection.

4.6.2 Static firing. The rocket motors shall be fired within 10 minutes of removal from the conditioning chamber. If the time limit is exceeded, the motor shall be reconditioned 2 minutes for each minute that it was out of the conditioning chamber for a maximum of the original conditioning time of 5 hours. Units shall be fired by energizing the igniter circuit with a 28 volt, 7 ± 0.5 ampere current.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

4.6.3 Test equipment. A suitable test fixture, with not less than 2 degrees of freedom, equipped with a recording oscillograph and instrumentation for measuring thrust and time, shall be used for firing the rocket motors. Calibration records, in accordance with MIL-STD-45662, shall be made available to the acquiring activity upon request.

4.6.4 Marginality of success evaluation. The contractor shall disassemble all fired rocket motors to inspect for indication of exhaust gas leaks or burn throughs, discoloration of the rocket motor exterior, evidence of propellant ejection, and deformation or failure of the components. A check-off sheet, acceptable to the acquiring activity, shall be utilized for this purpose. This sheet shall be included with the static firing test data (see 6.3).

4.7 Propellant mechanical property. When specified in the contract or purchase order, the propellant mechanical property shall be tested (see 6.3).

5. PACKAGING (see 6.3)

5.1 Preservation and packaging.

5.1.1 Level A. In addition to the following, Level A packaging shall be in accordance with 46 CFR 146 or 49 CFR 171-179, as applicable.

5.1.2 Unit packaging. Rocket motors shall be unit packaged for shipment in a container consisting of the following components:

a. MS24347-28 body, type I modified to 30.00-inch length
b. MS24347-53 cover, style D
c. MS24347-83 gasket
d. MS24347-63S, locking ring
e. 1/4-20 x 1 1/2 inches long bolt and nut
f. Rubberized hair per PPP-C-1120, grade 1 molded to fit MS24347-28 body type I modified to 30 inches
g. Pink antistatic tubing per MIL-B-81705
h. Desiccant bag per MIL-D-3464
i. Lockwire per MS20995C32
j. Packaging tape per PPP-T-60

5.2 Packing.

5.2.1 Level A. Rocket motors, packaged as specified in 5.1, shall be packed in accordance with 14 CFR 49, 46 CFR 146, or 49 CFR 171-179, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order (see 6.2), unit packages and shipping containers shall be marked in accordance with MIL-STD-129. All information appearing on the rocket motor package shall be stenciled or otherwise marked on the exterior of the rocket motor package.

5.4 Ammunition data cards. Ammunition data cards, in accordance with MIL-STD-1167, shall be completed for each production lot of rocket motors (see 6.3).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The rocket motor is used to provide auxilliary thrust to the Pioneer Short Range Remotely Piloted Vehicle during zero length take-offs.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification

b. Mark and Mod designation of the rocket motor

c. If first article is required, and, if so, location of the test facility designated to evaluate the sample

d. Disposition of the completed ammunition data card and first article inspection and test report

e. Quantity

f. Marking and serialization, if other than as specified (see 4.4.1, 5.3)

g. That the safety precaution requirements of the "Contractor's Safety Manual for Ammunition, Explosives, and Related Dangerous Material", DoD 4145.26M are applicable. NOTE: When this specification is used as part of the description of work to be accomplished by a government activity, the safety precaution requirements of "Ammunition and Explosives Ashore," OP 5 are applicable.

h. Inspection conditions if other than specified (see 4.3, 4.4)

i. Location of the test facility designated to evaluate the ballistic test sample.

j. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

6.3 Consideraton of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

Refrence Paragraph	DID Number	DID Title	Suggested Tailoring
4.3	DI-NDTI-80566	Test plan	---
4.3	DI-T-2072	Report, test	---
4.4	DI-NDTI-80566	Test plan	---
4.4, 4.5	DI-T-2072	Report, test	---
4.6.4	DI-ADMN-80424	Photographic records of equipment	---
Sections 3, 4, & 5	DI-T-2180	Propulsion unit lot acceptance data	---
4.7	DI-NDTI-80604	Test report	---
Sections 3, 4, & 5	DI-CMAN-80639	Engineering change proposal	---
Sections 3, 4, & 5	DI-CMAN-80640	Request for deviation	---
Sections 3, 4, & 5	DI-CMAN-80641	Request for waiver	---
5.4	DI-MISC-80043	Ammunition data card	---

The above DID's were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4 First article. When a first article inspection is required, it should consist of 12 rocket motors. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the government reserves the right to waive the requirements for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Rocket motor lot. A lot of rocket motor assemblies shall consist of units loaded from the same propellant and igniter lots and shall be submitted for inspection and test at the same time.

6.5.2 Propellant lot. A propellant lot may consist of more than one batch of propellant as long as each propellant ingredient used to manufacture the propellant lot is from one raw material lot to ensure homogeneity. As far as possible, all propellant ingredients needed for the entire lot of rocket motors should be premixed at one time. Ideally, only the curative should be added just prior to the final mix cycle.

6.5.3 Propellant batch. A batch of propellant is a mix of all ingredients including curative(s) manufactured at one time in one mixer/bucket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

6.5.4 Thrust time curve. All definitions apply to the thrust time curve for Mk 125 Mod 1 Rocket Motor (see figure 2).

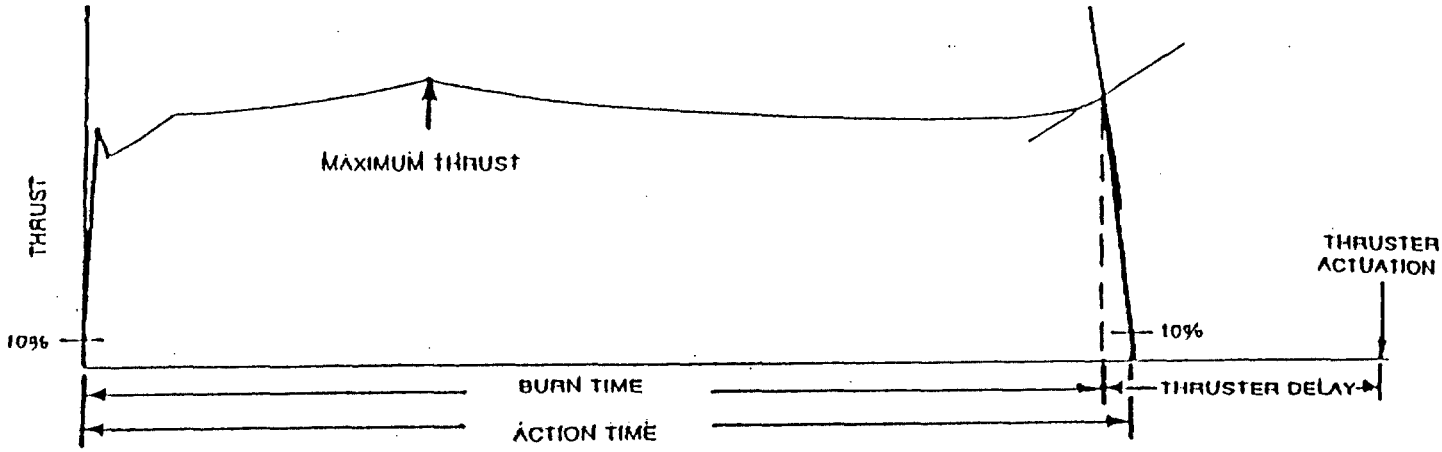


FIGURE 2. Thrust time curve for the MK 125 MOD 1 Rocket Motor.

6.5.4.1 Burn time. Burn time shall be measured on the time axis from 10% of peak thrust on the rising portion to web burn-out as determined from the tangent bisector method at the maximum rate of curvature.

6.5.4.2 Total Impulse. Total impulse is the integral of the thrust time curve over the action time of the rocket motor.

6.5.4.3 Action time. Action time shall be measured on the time axis from 10% of peak thrust on the rising portion to 10% of peak thrust on the decreasing portion.

6.5.4.4 Maximum thrust. Maximum thrust is the highest thrust reading obtained during the burn time.

6.5.4.5 Thrust angle. The thrust angle is the angle of the thrust of the rocket motor with respect to the rocket motor longitudinal axis. Thrust angle shall be measured over the rocket motor action time.

6.5.4.6 Thrust angle change. The thrust angle change is the change that the angle of the thrust experiences during the rocket motor action time.

6.5.4.7 Ignition delay. Ignition delay is the time from the application of current until 10% of peak thrust on the rising portion.

6.5.4.8 Thruster delay. Thruster delay is the time from the end of the burn time to the time that the ejection thruster actuates.

6.5.5 Shipping configuration. The rocket motor shall be packaged in its shipping container, without initiator installed.

6.5.6 Storage configuration. The rocket motor shall be out of its shipping container, without initiator installed.

6.5.7 Operational ready configuration. The rocket motor shall be out of its shipping container with initiator installed, and generally ready for surface launch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

6.6 Data techniques. If the contractor intends to use digital data processing techniques, he should include a description of these techniques in his proposal.

6.7 Relationship of requirements to quality assurance provisions. A cross-reference between the requirements of section 3 and the quality assurance provisions of section 4 is presented in table V.

TABLE V. Relationship of requirements to quality assurance provisions.

Requirement	Qaulity assurance provision(s)	
	Inspection	Test
3.1 First article	4.3	4.3
3.2 Conformance	4.4	4.4
3.3 Finish	4.5.1	
3.4 Hydrostatic proof		4.5.2
3.5 Radiographic inspection	4.5.3	
3.6 Leakage		4.5.4
3.7 Circuit resistance		4.5.5
3.8 Environmental resistance		4.5.6
3.9 Performance requirements		4.6.1, 4.6.2
3.9.1 Test instrumentation	4.6.3	
3.9.2 Marginality of success	4.6.4	
3.10 Production lot designation	4.4.1	
3.11 Workmanship	4.3, 4.4	

6.8 Subject term (keyword) listing.

Ballistic test
JATO
Propellant grain
RATO
Static firing
Thrust angle

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity
Navy (AS)
(Project 1340-N850)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-R-29565A(AS)	30 November 1990

3. DOCUMENT TITLE: ROCKET MOTOR, MK 125 MOD 1

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Commanding Officer NAEC (SESD) Code 53	(1) Commercial (908) 323-1116	(2) AUTOVON 624-1116
c. ADDRESS (Include Zip Code) Lakehurst, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:02Z
Check the source to verify that this is the current version before use.