MILITARY SPECIFICATION

SOCKS, FLYER'S ANTI-EXPOSURE, CWU-75/P

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of flyer's anti-exposure sock designated as CWU-75/P.

1.2 Classification.

1.2.1 Sizes. The socks shall be furnished in whole sizes 4 through 13, as specified (see 6.2.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and Standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (6.2).

SPECIFICATIONS

FEDERAL

PPP-B-601	Boxes, Wood Cleated Plywood
PPP-B-636	Boxes, Shipping Fiberboard
PPP-B-640	Box, Fiberboard Corrugated, Triple-Wall
PPP-T-60	Tape, Packaging, Waterproof

MILITARY

MIL-B-117	Bags, Sleeves and Tubing
MIL-C-29567	Cloth, Laminated, Stretchable, Water and Moisture Vapor Permeable
MIL-C-44187	Cloth, Laminated, Waterproof and Moisture Vapor Permeable
MIL-S-85634	Sealer, Heat, Seam Tape and Patch, Anti-Exposure Coverall

STANDARDS

"Beneficial comments (recommendations, additions, deletions) and any pertinent data that may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Systems Engineering and Standardization Department (SESD) Code 53, Lakehurst, NJ 08733-5100, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

FED

FED-STD-751 Stitches, Seams and Stitchings

MILITARY

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 Marking for Shipping and Storage
MIL-STD-831 Test Reports, Preparation of

2.1.2 Government drawings. The following Government drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

NAVAL AIR SYSTEMS COMMAND

1725AS100 Sock, Assembly, CWU-75P

1725AS180 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 4

1725AS181 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 5

1725AS182 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 6

1725AS183 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 7

1725AS184 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 8

1725AS185 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 9

1725AS186 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 10

1725AS187 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 11

1725AS188 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 12

1725AS189 Sock's, Pattern, Anti-Exposure, CWU-75/P Size 13

1370AS502 Seam Tape and Patches, Heat Sealable, Anti-Exposure Coverall, CWU-62A/P and CWU-74/P

(Copies of specifications, standards, and government drawings required by contractors in connection with specific acquisition functions should be obtained from the acquisition activity or as directed by the contracting officer.)

2.1.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, (except for related associated detail specifications, specification sheets or MS standards) the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order (see 6.2 and 6.3) samples shall be subjected to first article inspection in accordance with 4.3.

3.2 Materials and components. The materials and components shall conform to applicable specifications, standards and drawings as required herein (see 6.2.1).

3.3 Design. The socks shall conform to Drawing 1725AS100, and shall be fabricated from laminated cloth. The anti-exposure socks are individually sized and attached to the CWU-62A/P anti-exposure coverall by maintenance personnel.

3.4 Construction. The socks shall be constructed in accordance with Drawing 1725AS100 using sewn seams covered on the innerside of the sock by heat sealed tapes. The contractor should use caution and every effort should be exerted to assure that the manufacturing area is free of sharp or rough edges, burrs, protrusions, and any other kind of object which will cut, tear, snag, impair, damage or injure the assembled socks or the component parts during the cutting and joining operations.

3.4.1 Cutting. The socks shall be cut in strict accordance with Drawings 1725AS180 through 1725AS189, as applicable, (see 6.4), which provides for seam allowance; directional lines for cutting; and match markings for proper assembling of all parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns.

3.4.1.1 Stretch component material. The material for the stretch components of the sock shall be in accordance with MIL-C-29567. -color.

3.4.1.2 Non-stretch component material. The material for the non-stretch components of the sock shall be in accordance with MIL-C-44187 except as noted in Table I. The color of the non-stretch components shall be Sage Green No. 1590 and all references to color in MIL-C-44187 shall be changed to Sage Green.

3.4.2 Shade size and marking. The component parts of the socks shall be marked or ticketed by any commercial method, including bundling, to insure a uniform shade throughout the sock and for the proper assembly of the socks. No metal fastening device or sewn-on ticket shall be used. The shade and size markings may be accomplished by the use of an ink pad numbering machine or rubber stamp, provided the markings do not show through the outerside of the socks and are not deleterious to the cloth. The markings placed on the seam allowance shall not be visible on the outerside of the socks. The adhesive type shade and size marking tickets may be used for the shade and size markings (see 3.4.2.1). The assembled socks shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component. Drill holes may be used to mark the lay outside of the pattern area.

3.4.2.1 Adhesive shade tickets. The adhesive shade tickets shall be fabricated from paper with a thermoactivated adhesive on one side. The adhesive shall not discolor the cloth and the adhesive mass shall not adhere to the cloth upon removal of the ticket. The heat used to attach the thermoactivated adhesive tickets shall not stiffen, harden, sear or damage the cloth in any manner.

3.4.3 Stitches, seams and stitching. Use stitch type 301 of FED-STD-751 having 9 to 11 stitches per inch. A size 11 needle with a round point shall be used in the construction of the sock. Each row of stitching shall be straight and parallel to the seam edge. The thread tensions shall be maintained so that there shall be no loose or tight stitching

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

and the thread lock shall be imbedded in the center of the materials being sewn together. Thread breaks, skips and run-offs shall be overstitched no less than 1/2 inch. The ends of the stitching not caught in other seams or stitchings shall be backstitched not less than 1/2 inch. No loose thread (end of stitching) may protrude more than 1/16 inch beyond the stitch line.

3.4.4 Heat Sealing. All sewn seams and stitching shall be covered on the innerside of the socks and sealed with seam tape conforming to Drawing 1370AS502. A minimum of 5/16" of heat seal tape shall be on either side of seam. The entire width of the seam tape shall be hot air sealed over the seams and stitching with the "Gore Hot Air Machine" (see 6.5), or equivalent. The machine is designed to waterproof sewn seams and stitching. No thread ends shall protrude beyond the edge of the seam tape. Tape crossover areas and ends left unsealed by the seam sealing machine shall be sealed by the MIL-S-85634 sealer or equivalent. All seam tapes shall be applied to the sock seams without tension. At no point shall the tape lift from the seam. Splicings and tape ends shall overlap not less than 3/4 inch. The sealing conditions shall be set so that the sock meets the sock leakage test as specified in 4.7.2. There shall not be more than 3 layers of seam tape at any point on the sock.

3.4.5 Patching. The sock may contain a maximum of 1 patch. Patching of fabrication defects shall be permitted by a 2 inch length of seam tape on the innerside of the sock. Patches should be applied using the MIL-S-85634 sealer at a temperature of approximately 350oF for approximately 20 seconds. When patching is used, the leakage of the patched area shall conform to 3.5.1. Major defects listed in Table II shall not be patched.

3.5 Performance characteristic.

3.5.1 Sock leakage. All socks, when inspected as specified in 4.7.2, shall not leak and there shall not be any evidence of constructional or material failure in any respect.

3.6 Visual Examination.

3.6.1 Socks. When visually inspected as specified in 4.7.1.1, the socks shall conform to the requirements of this specification and applicable drawings. Table II, Classification of Defects for Visual Examination, shall be used to classify and enumerate the defects.

3.7 Markings.

3.7.1 Identification. Each sock shall contain identification markings conforming to drawing 1725AS100.

3.7.2 Serial numbers. The socks shall be identified by individual serial numbers which shall be assigned by the manufacturer. Serialization shall be by a block of consecutive numbers to cover the entire acquisition document quantity.

3.8 Workmanship. The socks shall be uniform in quality and shall be free from irregularities or any defects that could adversely affect performance, reliability, or durability. Because of the emergency and life support use of the socks, the importance of providing a product of uniformly excellent quality cannot be overemphasized. The socks shall conform to the quality and grade of product established by this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examination and test) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection. The first article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification (see 4.3).

b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on the individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.4).

c. Quality conformance verification inspection. Quality conformance verification inspection consists of test and examinations performed on individual units from production lots to verify conformance of the lots with the requirements set forth in this specification (see 4.5).

4.3 First article.

4.3.1 First article inspection. The first article inspection of the socks shall consist of the examinations and tests listed in Table IV.

4.3.2 First article samples. Unless otherwise specified in the contract, as soon as practicable after award of the contract or purchase order, the manufacturer shall submit samples consisting of the following:

a. One pair of socks for each size ordered in the contract.

b. Two additional pairs of socks of any size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

The samples shall be representative of the construction, workmanship, components and materials to be used during production. When a contractor is in continuous production of these socks from contract to contract, submission of further first article inspection samples, on the new contract, may be waived at discretion of the acquiring activity (see 6.2.1f). Approval of the first article inspection samples or the waiving of the first article inspection does not waive the requirements for performing the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2.1g).

4.3.3 First article report. Upon completion of the first article inspection program, the Government activity responsible for conducting the inspection program (see 6.2.1g) shall report to the contracting officer the results of the inspection program, with appropriate recommendations.

4.3.4 Disposition of first article samples. Upon completion of the first article inspection program, sample disposition shall be as follows:

a. The approved sock samples of each size (see 4.3.2a) will be returned to the contractor for reference in monitoring production.

b. One of the two additional approved sock samples of any size (see 4.3.2b) will be retained by the Quality Conformance Verification Inspection laboratory for reference, and will be returned to the manufacturer with the samples from the final production lot.

c. The remaining sock sample of any size (see 4.3.2b) will be consumed or destroyed during testing and will not be considered as part of the quantity to be delivered under the contract or purchase order.

4.4 Quality conformance inspection. The quality conformance inspection shall consist of the examinations and tests listed in Table V.

4.4.1 Sampling.

4.4.1.1 Inspection lot.

4.4.1.1.1 Socks. The inspection lot size shall be expressed in units of one pair made essentially under the same conditions and from the same materials and components. The sample unit shall be one pair.

4.4.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing socks of one size, fully prepared for delivery from essentially the same materials and components. The sample unit shall be one shipping container, containing socks of one size, fully prepared for delivery with the exception that it need not be sealed.

4.4.1.2 Sampling for tests and examinations of the socks and packaging. The sampling size, acceptable quality level, tests and examinations required for the socks and packaging shall be as specified in Table V.

4.5 Quality conformance verification inspection.

4.5.1 Quality conformance verification inspection at a laboratory. Upon successful completion of the tests and examinations specified in Table V, a random sample shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

selected from each lot in accordance with MIL-STD-105, Inspection Level S-3. The sample size shall be based only on the applicable sample size code letter corresponding to Inspection Level S-3. Selection of the samples shall be made by the cognizant Government quality assurance representative/specialist. Each pair of socks selected as a sample unit shall be identifiable by its assigned serial number (see 3.7.2). Additionally, the serial number of all the units in the lot represented by the samples shall be furnished with the submitted samples. The samples shall be forwarded to the inspection laboratory specified in the acquisition document (see 6.2.1h), for the following tests and examinations (listed sequence mandatory):

TESTS AND EXAMINATIONS

Visual examination	4.7.1
Sock leakage	4.7.2

The Government activity responsible for conducting the inspection program (see 6.2.1h) shall report the results of the tests and examinations to the designated inspection and acceptance office specified in the acquisition document. Final acceptance of the lot from which the samples were selected shall be based upon successful completion of the inspection program by the cognizant Government quality assurance representative/specialist. Sample units from a rejected lot shall not be resubmitted for test and examinations without approval of the contracting officer.

4.6 Inspection conditions.

4.6.1 Inspection/testing area and equipment. The area in which the socks are inspected or tested shall be adequately protected to preclude damage to the units. The area and inspection equipment shall be free of sharp or rough edges, burrs, protrusions, and any other kind of object which will cut, tear, impair, snag, damage or injure the garments or the components. The test area shall be well lit, with the lighting being even throughout the area so as not to cast shadows on the

sock being inspected or tested. The lighting in the leakage test area shall be sufficient to observe minute air bubbles. The position of the leak tester shall be slightly below eye level but above the waist to accommodate ease of testing.

4.7 Inspection methods.

4.7.1 Visual examination.

4.7.1.1 Socks. Each sock shall be visually examined for conformance to the requirements of 3.6.1.

4.7.1.2 Packaging. The preservation, packing, and markings shall be inspected to verify conformance to the requirements of 5.4.

4.7.2 Sock leakage. Each of the assembled socks shall be tested for conformance to the requirements of 3.5.1. The completed sock shall be tested for waterproofness as follows:

a. In a well lit area (see 4.6.1), turn sock to be tested inside out. Care should be taken to avoid excessive stretching which may damage the laminate material. Wet the outer taped surface with soap solution (one liter of water to two drops of mild liquid soap, such as Ivory liquid) being careful not to wet the inner untaped surface of sock (face side of fabric).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

b. Clamp wet sock on "Gore Sock Tester" (see 6.5), or equivalent (as shown in figure 1). Inflate and maintain 0.5 psig air pressure.

c. To inspect for leakage, sock must be visually divided into 4 to 6 sections. Focusing on one small section of sock, thoroughly wet outer taped surface of that section, and allow seven to ten seconds to elapse while looking for formation of soap bubbles on surface of sock. Pay particular attention to edges of tape. Note location of bubbles, respray, and as before allow seven to ten seconds to elapse while observing. Reappearance of soap bubbles at same location indicates a leak. Mark area of leakage with a china marker. Do not use ball point pen. If bubble formation is questionable, respray same area again waiting seven to ten seconds for bubbles to form. Do not repeat this procedure more than three times. If leakage is still questionable after three checks, dry sock completely before repeating these steps. Repeat this procedure on all other sock sections assuring that entire sock surface has been observed for leaks, ie. sides, back and sole.

d. Remove sock from tester. Dry sock thoroughly. Reseal leaking areas in accordance with paragraph 3.4.4 or patch in accordance with paragraph 3.4.5, as applicable. Sock must be dry before using heat sealer. Do not heat seal when wet. Do not dry sock by applying heat with heat sealer. Damage which exceeds patching limits shall be cause for rejection of the sock.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Industrial, as specified (see 6.2.1j).

5.1.1 Level A. Each pair of socks shall be neatly folded, in accordance with the commercial practice, to an appropriate size to fit in a bag conforming to MIL- B-117, Type II, Class C, Style I, inside dimension 8"X12". Closure shall be by heat sealing. Six pair of bagged socks shall be placed into a close fitting, one piece folded corrugated fiberboard box conforming to PPP-B-636, Class Weather- Resistant, Style OPF. Container closure shall be accomplished with PPP-T-60 tape of two inch width across each opening/seam. Closures shall not be effected by adhesive bonding or stapling.

5.1.1.1 Intermediate packaging. Twenty-four pairs of socks of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class weather-resistant, style RSC of PPP-B-636. The container shall be closed and reinforced in accordance with the appendix of the container specification. Closure of the container shall be accomplished by adhesive bonding or tape-sealing (no staples permitted) in accordance with procedures given in the appendix to PPP-B-636. If the quantity of socks of the same size is less than the quantity of socks required per container, mixed sizes (see 5.3.1) may be packed within the same shipping container.

5.1.2 Industrial. The socks shall be preserved and packaged to afford adequate protection against deterioration and physical damage during shipment from supply source to the first receiving activity. This level of packaging may conform to the supplier's commercial practice provided the latter meets the requirements of this level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

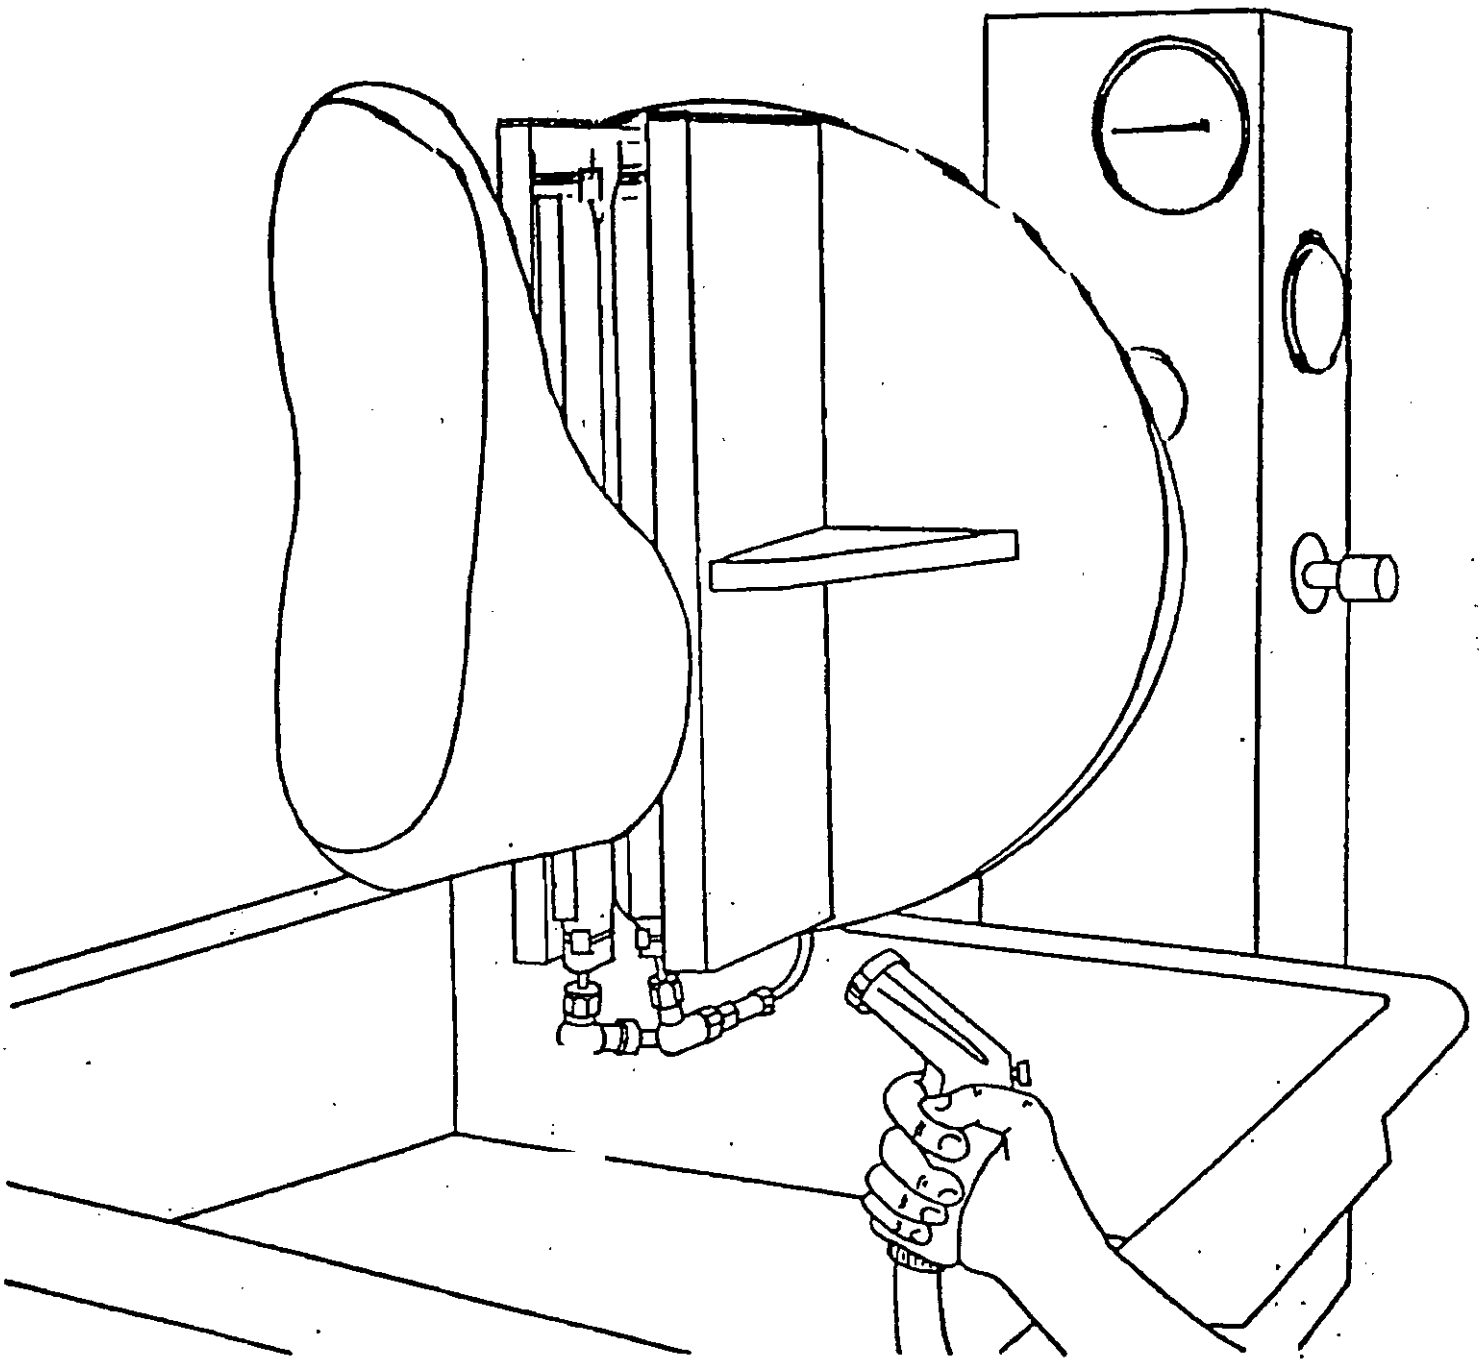


FIGURE 1. Sock tester

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be Level A, B, or Industrial, as specified (see 6.2.1j).

5.2.1 Level A. Twenty-eight pairs of socks, packaged as specified shall be packed in an overseas type cleated-plywood box conforming to PPP-B-601. Container closure shall be accomplished with screws or spring wire closures; nailing is not permitted for container closure. Strapping shall be in accordance with PPP-B-601 appendix requirements.

5.2.2 Level B. Level B packing shall be accomplished by insertion of intermediate packages into corrugated fiberboard boxes of the weather-resistant class in accordance with PPP-B-636 (minimum grade 275) or PPP-B-640. Closure of the container shall be in accordance with the appendix of PPP-B-636, except that stapling or wire stitching is not permitted. Banding/strapping used shall be of a non-metallic variety.

5.2.3 Industrial. The socks shall be packed to afford adequate protection, at the lowest rate, against damage during direct shipment from the supply source to the first receiving activity. The containers shall conform to the rules and regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special markings required by contract or purchase order (see 6.2.1k), interior and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Mixed sizes. Each shipping container that is packed with mixed sizes (see 5.2.1) shall have securely attached to the end and side, directly under the printing and stenciling, a white paper label 5 by 4 inches with the words "mixed sizes" plainly stamped or printed thereon. Under these words shall be legibly stamped or printed the quantities and sizes of the socks therein.

5.4 Packaging. When visually inspected as specified in 4.7.1.2, the fully prepared shipping containers, containing socks, shall conform to the applicable packaging, packing and marking requirements of Section 5 Table III, List of Defects for Packaging, shall be used to enumerate the defects.

6. NOTES

(This section contains information at a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The socks covered by this specification are intended for use with a continuous wear coverall worn during overwater flights to protect the aircrewmember from hypothermia in the event of immersion in cold water. The socks will be fitted on an individual basis and attached to the coverall by maintenance personnel.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification, including any amendments.

b. Government part numbers.

c. National stock numbers.

d. Applicable Government drawings, including revisions.

e. Sizes and Quantities desired.

f. Whether first article inspection is waived (see 4.3.2).

g. Name and address of the first article inspection laboratory (see 4.3.2) and the name and address of the Government activity responsible for

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

conducting the First [illegible] inspection program (see 4.3.3).

h. Name and address of [illegible]ity conformance verification inspection laboratory (see 4.5.[illegible] and the name and address of the Government activity responsible [illegible] conducting the quality conformance verification inspection program (see 4.5.1).

i. Certificate of compliance to be provided by the contractor for materials and components to applicable specifications, standards, and drawings (see 3.2).

j. Selection of applicable levels of preservation (see 5.1) and packing (see 5.2).

k. Whether any special markings are required (see 5.3).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
4.3	DI-NDTI-80604	Test Report	Use contractor format

The above DID's where those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.4 First article. When a first article inspection is required, the items should be a first article sample. The first article sample shall be as specified in 4.3.2. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first article test results and disposition of first article. Invitation for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Patterns. The patterns for the socks will be furnished by the contracting officer to the contractor for use in cutting work patterns (see 3.4.1).

6.6 Hot air sealing apparatus and sock tester. Information on the "Gore Hot Air Machine" described in 3.4.4, and the "Gore Sock Tester" described in 4.7.2, may be obtained from W.L. Gore & Associates, Inc., P.O. Box 1130, Elkton, MD 21921.

6.7 Subject term (keyword) listing.
Anti-exposure socks
Anti-exposure coveralls
PTFE laminate stretch material
Sealing Machine, Heat

Preparing Activity
Navy- AS
(Project 8475-N218)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE I. General exceptions to MIL-C-44187

Paragraph Number	Section
2.1	Drawing 2-1-15168
3.4.4	Pattern execution
3.4.5	Spectral reflectance
Table I	Spectral reflectance limits
Table V	Spectral reflectance Abrasion
4.5.1	Infrared reflectance test
6.1	Intended use

Source: https://assist.dla.mil Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual examination of the assembled socks.

Defect	Major	Minor
General		
Any hole, scissor or knife cut, tear, mend burn, needle chew or abraded area	X	
Any evidence of fabric delamination	X	
Any spot or stain (compound, oil or dirt) over 1 inch in length in any direction clearly visible 1/		X
Color of any component not as specified or contains any thread scraps not removed		X
Any thread end not trimmed to 1/16 inch	X	
Any damaged tape edges greater than 1/16 inch from the outside edge		X
More than one two-inch patch per sock	X	
Failure to trim tape to contour of sock top greater than 1/16 inch from top		X
Components and Assembly		
Any defective component or defect that will seriously affect the life saving characteristics of the assembly	X	
Any component part not as specified or required operation improperly performed which is not herein classified	X	
Any component part not cut in accordance with the patterns	X	
Hot Air Sealing		
Any seam tape not located as specified	X	
Any stitching not covered by seam tape	X	
Scorching less than 1 inch long		X
Scorching more than 1 inch long	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual examination of the assembled socks - Continued.

Defect	Major	Minor
Seams and Stitching		
Any seam that is pleated, puckered or caught in any unrelated operation or stitching that is not properly forced out or contained in a fold more than 1/8 inch 2/.	X	
End of stitching not securely backstitched for at least 1/2 inch when not caught in other seams or stitching		X
Thread breaks, skips and run-offs not securely overstitched for at least 1 inch.		X
Any stitching, irregular or unevenly gaged (to be scored only when condition exists on the major portion of the seam)		X
Not specified seam or stitch type	X	
Loose tension resulting in a loose seam or tight tension resulting in breaking of stitches when normal pull is applied. 2/	X	
Stitches per inch one or two more or less than specified (to be scored only when condition exists on the major portion of the seam)		X
Stitches per inch more than two stitches more or less than specified (to be scored only when condition exists on the major portion of the seam)	X	
Any open seam 3/	X	
Identification Markings		
Identification missing	X	
Size marking missing, incorrect or illegible	X	
Other than size information, markings are incorrect, incomplete or illegible		X
Misplaced by more than 1 inch		X

Source: https://assist.dla.mil - Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual examination of the assembled socks - Continued.

1/ Clearly visible shall be interpreted as meaning clearly visible at an examination distance of approximately 3 feet under an overhead illumination. Spots and stains which appear only while water testing socks for leakage shall not be classified as defects. Only stains and spots which are visible when socks are dry shall be classified.

2/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as a seaming defect.

3/ A seam shall be considered open whether one side or both sides are open.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE III. List of defects for packaging. (see 4.7.1.2)

Item	Defect
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; of improper size, location, sequence or method of application; size shown on any interior or exterior container not the same.
Materials	Any nonconforming component; any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components, such as incomplete closure of any unit container or container flap, loose strapping, bulging or distortion of the container, or any waterproof bag damaged.
Exterior and interior weight or content	Gross or net weight exceeds the requirements; number per container more or less than specified; more than one size sock in the same exterior container; any sock not individually packaged; any deformed, distorted or bent or any portion of any sock caught in any heat sealed seam.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.

TABLE IV. First article examinations and tests (see 4.3.1).

Item	Paragraph	
	Requirement	Test
Visual examination	3.6.1	4.7.1.1
Sock leakage	3.5.1	4.7.2

TABLE V. Inspection sample size and acceptance criteria for socks, components and packaging. (see 4.4)

Inspection	Method Paragraph	Requirement Paragraph	Sample Size	Acceptance Criteria
Visual Examination	4.7.1.1	3.6.1.	Every sock	Reject all socks with any major defects and any sock with more than 2 minor defects
Sock leakage	4.7.2	3.5.1	Every sock	Reject all defective socks
Packaging	4.7.1.2	5.4	Inspection level S-2 1/	An acceptable quality level of 2.5 defects per 100 units 1/

1/ The sample size and acceptance criteria shall be in accordance with MIL-S-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:00:52
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-S-29566(AS)	2. DOCUMENT DATE (YYMMDD) 19 October 1990

3. DOCUMENT TITLE
SOCKS, FLYER'S ANTI-EXPOSURE, CWU-75/P

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Commanding Officer NAEC (SESD) Code 53	b. TELEPHONE (Include Area Code) (1) Commercial (908) 323-7457 (2) AUTOVON 624-7457
c. ADDRESS (Include Zip Code) Lakehurst, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete. 196790

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T00:03Z
Check the source to verify that this is the current version before use.