MILITARY SPECIFICATION

PACKAGING OF TELESCOPE, B. C., M65

1. SCOPE

1.1 This specification covers the packaging, packing and marking for domestic shipment and storage, overseas shipment and interplant shipment of Telescope, B. C., M65, with or without equipment.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS.

2.1 The following specifications and standard of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

Federal

NN-B-601	-	Boxes, Wood-Cleated-Plywood, For Domestic Shipment.
NN-B-621	-	Boxes, Wood, Nailed and Lock Corner.
UU-T-111	-	Tape; Paper, Gummed (Kraft).
UU-C-843	-	Cushioning Materials, Cellulosic.
UU-P-313	-	Paper, Lens Tissue.
LLL-B-631	-	Boxes; Fiber, Corrugated (For Domestic Shipment).
LLL-B-636	-	Boxes; Fiber, Solid (For Domestic Shipment).
LLL-F-291	-	Fiberboard, Corrugated, Single Face (Flexible).

Military

JAN-P-101	-	Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-105	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Cleated, Plywood.
JAN-P-106	-	Packaging and Packing for Overseas Shipment - Boxes, Wood, Nailed.
JAN-P-108	-	Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board) Exterior and Interior.
MIL-P-116	-	Preservation, Methods of.
JAN-B-121	-	Barrier-Materials, Greaseproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

Military (Contd.)

JAN-P-125	-	Packaging and Packing for Overseas Shipment - Barrier Materials, Waterproof, Flexible.
JAN-P-127	-	Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure Sensitive, Water-Resistant.
MIL-B-131	-	Barrier Materials; Water-Vaporproof, Flexible.
JAN-B-139	-	Packaging and Packing for Overseas Shipment - Plywood, Container Grade.
MIL-C-7769	-	Cushioning Material, Bound Fiber.
MIL-D-3464	-	Desiccants (Activated) In Bags; For Static Dehumidification and Packaging.
MIL-C-11796	-	Compound, Corrosion Preventive, Petrolatum Type, Hot Application.

U. S. Army

19-10	-	Fillers, Interior Packing, Fiberboard, Corrugated, Single and Double Faced.

Ordnance Department Tentative

AXS-1472	-	Adhesive, Label (Water-Resistant).

STANDARD

Military

MIL-STD-129	-	Marking of Shipments.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Materials - The following shall apply where packaging materials are referred to in this specification by name only:

Reference	Full identification
Cellulosic cushioning material	Type II or III, any class, at least 1/4" thick of Specification UU-C-843
Double faced corrugated fiberboard	Specification 19-10
Flexible single face corrugated fiberboard	Type I of Specification LLL-F-291
Greaseproof barrier material	Any type, grade C, class 1 of Specification JAN-B-121
Preservative compound	Class 3 of Specification MIL-C-11796
Pressure sensitive tape	Any type and grade of Specification JAN-P-127

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

3.2 Cleaning

3.2.1 Warning - The optics on each instrument have been cleaned and covered with neutral lens tissue paper, which conforms to type II of Specification UU-P-313, and the plugs placed in the objective ends of the telescope before being sent to the packaging section. If the plugs have been removed or the tissue on the eyelenses has become inadvertently unwrapped or damaged, the instrument shall be subjected to further inspection and the optics covered by competent optical personnel.

3.2.2 The exterior surfaces of the telescope and the equipment shall be cleaned so as to be free from dirt, smudges, fingerprints and foreign substances in accordance with method C-1 of Specification MIL-P-116.

3.3 Packaging - Packaging the telescope is illustrated in figures 1, 2 and 4.

3.3.1 Prepackaging the telescope without equipment

3.3.1.1 The tissue paper over the eyelenses shall be secured in place with pressure sensitive tape. Cellulosic cushioning material shall be placed over the tissue covered eyelenses. The cushioning material shall be secured in place with pressure sensitive tape.

3.3.1.2 Both ends of the telescope shall be wrapped with at least two thicknesses or layers of flexible single face corrugated fiberboard. The wrap shall be secured with gummed tape conforming to class 2 of Specification UU-T-111.

3.3.1.3 The required units of desiccant conforming to class 2 of Specification MIL-D-3464 shall be secured to the telescope with pressure sensitive tape. The required units of desiccant shall be determined in accordance with Formula I of Specification MIL-P-116.

3.3.1.4 A humidity indicator, specified in Specification MIL-P-116, shall be secured to the end of the telescope with pressure sensitive tape in such a manner that when the telescope is placed in the water-vaporproof bag (specified in 3.3.1.5), the indicator will be at the opening of the bag where it can be readily seen when the bag is opened.

3.3.1.5 The telescope shall be placed in a water-vaporproof bag fabricated from barrier material conforming to class A of Specification MIL-B-131. Sufficient barrier material shall be provided at the opening of the bag to make two additional seals. The opening of the bag shall be heat sealed in such a manner that the bag can be opened and resealed at least twice as specified in Specification MIL-P-116. The bag shall be heat sealed exhausting entrapped air prior to final closure.

3.3.2 Prepackaging the telescope with equipment

3.3.2.1 Telescope with instrument light

3.3.2.1.1 The telescope with the instrument light positioned and secured to it as shown in figure 1 shall be prepackaged as specified in 3.3.1, except that the knob and other projections on the light shall be covered with at least two thicknesses of

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

flexible single face corrugated fiberboard, which shall be secured with pressure sensitive tape; also, the bags of desiccant shall be secured to the ends of the telescope with pressure sensitive tape as illustrated in figure 1. Dry cell batteries shall not be inserted in the instrument light.

3.3.2.1.2 The bagged telescope with instrument light shall be positioned in Packing Chest M39A1 in such a manner that the barrier material will not be damaged when the lid is closed (see Figure 2). The two brushes shall be wrapped with kraft paper and placed inside the chest prior to closing the lid.

3.3.2.2 Telescope mount, telescope adapter, Tripod M10 and wrench

3.3.2.2.1 The mount shall be assembled to the adapter, and the level assembly on the mount shall be covered with cellulosic cushioning material. The cushioning material shall be secured in place with pressure sensitive tape. Preservative compound shall be applied on the spindle. The assembled mount and adapter shall be wrapped with greaseproof barrier material. The wrapped unit package shall then be placed in its respective position in Carrying Case M45.

3.3.2.2.2 The tripod legs shall be removed from the head. Preservative compound shall be applied on unprotected surfaces. Each tripod leg and the head shall be wrapped with greaseproof barrier material. The wrench shall be placed on the bottom of Carrying Case M45 in its respective position. The wrapped tripod head and legs shall be placed in their respective places in the carrying case.

3.3.2.3 Tripod M17 and cover assembly

3.3.2.3.1 The tripod legs shall be pushed back to their retracted position and clamped. The tripod legs shall then be strapped together with the straps provided on the tripod.

3.3.2.3.2 The cover assembly does not require any prepackaging.

3.3.3 Unit packaging the telescope without equipment

3.3.3.1 Method of immobilizing the prepackaged telescope in the unit container - Each telescope prepackaged as specified in 3.3.1 shall be cushioned and immobilized in a fiberboard box, conforming to the box specified in 3.3.3.2, which has the inside surfaces lined with either rubberized curled hair or rubberized shredded fibers conforming to type IV (at least 2 inches thick) of Specification MIL-C-7769. When the prepackaged telescope is placed in the box, the cushioning material shall be compressed to the required amount to hold the prepackaged telescope snugly in the box when the box is closed.

3.3.3.2 Unit container for the telescope without equipment - The fiberboard unit container shall conform to any compliance symbol, except W6, and any style, except FTC, of Specification JAN-P-108. Each box shall be closed by applying water-resistant adhesive over all areas of contact on the flaps and covering all seams, including the manufacturer's joint, with pressure sensitive tape. The adhesive shall conform to Specification

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

JAN-P-101 and the tape shall conform to type II or III, grade A or B (at least 2 inches wide) of Specification JAN-P-127.

3.3.4 Unit packaging for the prepackaged telescope with equipment

3.3.4.1 Packing Chest M39A1 and Carrying Case M45

3.3.4.1.1 After the items have been prepackaged and placed in the chest and in the case as specified in 3.3.2.1 and 3.3.2.2, the lids shall be closed and secured.

3.3.4.1.2 Each chest and each case shall then be placed in individual fiberboard boxes. Each side of the chest and case that contains a handle, trunk bolts or hinges shall have a strip of double faced corrugated fiberboard placed between the hardware and the inside surface of the fiberboard box. The length and width of each fiberboard strip shall be approximately equal to the length and width of the side of the chest or case on which the hardware is located.

3.3.4.1.3 The fiberboard boxes shall be as specified in 3.3.3.2 and closed in the same manner.

3.3.4.2 Tripod M17

3.3.4.2.1 The tripod shall be placed in a fiberboard box. At least two strips of double faced corrugated fiberboard shall be placed between the pointed feet on the tripod and the end of the box. The length and width of the fiberboard strips shall be approximately equal to the inside length and width of the end of the box.

3.3.4.2.2 The fiberboard box and closure of the box shall be as specified in 3.3.3.2.

3.3.4.3 Cover assembly - The cover assembly shall be placed in a fiberboard box. The fiberboard box shall be as specified in 3.3.3.2, except that a box under compliance symbol W6c or W6s is acceptable. Closure of the box shall be as specified in 3.3.3.2.

3.4 Packing

3.4.1 Telescope without equipment

3.4.1.1 For domestic shipment and storage

3.4.1.1.1 The shipping container shall conform to either of the following specifications:

NN-B-601, style A or B, type B or C
NN-B-621, style 2 or 4

3.4.1.1.2 The shipping container shall contain not more than six telescopes without equipment.

3.4.1.1.3 The nailed wood box shall be strapped with steel straps as required in Specification NN-B-601. The plywood box shall be strapped with steel straps in accordance with Specification JAN-P-105. Straps shall not be stapled.

3.4.1.2 For overseas shipment

3.4.1.2.1 The shipping container shall conform to either of the following specifications, utilizing group I or II lumber

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

and flat steel straps:

JAN-P-105, Style A or B. Plywood shall conform to type A or B, condition I of Specification JAN-P-139
JAN-P-106, Style 2 or 4. Minimum thickness of lumber for sides, top and bottom shall be 11/16 inch, when shipment is to be made by an ocean going vessel

3.4.1.2.2 Quantity of telescopes packed in the shipping container - One unit packaged telescope shall be packed in the overseas shipping container.

3.4.1.2.3 Size and weight of packed shipping container - The following inside dimensions, cubage and gross weight are approximate for one unit packaged telescope packed in a nailed wood box:

Inside dimensions - 24." long x 9-1/2" wide x 14-1/2" deep
Cubage - 2.8 cubic feet
Gross weight - 47. pounds

3.4.2 Telescope with equipment

3.4.2.1 For domestic shipment and storage or for overseas shipment - One packaged telescope and equipment shall be packed in a container conforming to one of the containers specified in 3.4.1.2.1 for domestic shipment and storage or for overseas shipment.

3.4.2.1.1 Size and weight of packed shipping container - The following inside dimensions, cubage and gross weight are approximate for one packaged telescope and equipment packed in a nailed wood box:

Inside dimensions - 46." long x 21" wide x 11-1/2" deep
Cubage - 8.4 cubic feet
Gross weight - 158 pounds

3.5 Immobilizing - The contents of each carrying case, fiberboard container and shipping container shall be immobilized in such a manner that they cannot move about after the container is closed. Figure 3 illustrates the method in which the packaged telescope and equipment shall be immobilized in the shipping container.

3.6 Identification and marking

3.6.1 Fiberboard boxes - The identification data required in Standard MIL-STD-129 for interior packages shall be added on each fiberboard unit container which contains a telescope without equipment, by printing or marking either directly on the exterior surface or on a label affixed to the exterior surface. The serial number shall be added in the identification data. (See 6.3 for the stock number to be added in the identification data.) Identification data need not be added on each fiberboard box inside a shipping container containing the telescope with equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

3.6.2 Shipping container - In addition to other markings that may be required (see 6.3), the information to be placed on each container shall be in accordance with Standard MIL-STD-129. The identification data shall be stencilled or printed on the container. Shipping container shall contain packing lists showing the contents and serial numbers of the items in the container. Fragile labels shall be affixed to each shipping container. (See 6.3 for the stock number to be added in the identification data.)

3.6.3 Method II package indication - Method II labels shall be affixed to at least one side of each unit container containing a telescope; also, to the shipping container in accordance with Standard MIL-STD-129 and Specification MIL-P-116.

3.6.4 Official Ordnance Corps Inspection Seal (Escutcheon) - Evidence of inspection shall be shown by either stamping the escutcheon on each fiberboard unit container and shipping container or affixing paper seals to same.

3.6.4.1 Fiberboard unit container - If paper seals are used, a seal shall be affixed to each box in such a manner that the seal will be damaged if the box is opened. If a rubber stamp is used, the escutcheon shall be applied in such a manner that at least a portion of it is on the sealing tape which is used to seal the box.

3.6.4.2 Shipping container - Either a paper seal or a stamped escutcheon shall be placed adjacent to the permanent markings.

3.6.4.3 Application of Ordnance District's symbol - The Ordnance District's symbol, such as NYOD, BOD, etc. shall be added on each paper seal or adjacent to each stamped escutcheon.

3.6.5 Coating labels and paper seals - Labels and paper seals (if used) shall be affixed and coated with water-resistant label adhesive conforming to Specification AXS-1472.

3.7 Interplant shipment requirements - Where an interplant shipment is involved, the following cleaning, packaging, packing and marking requirements shall apply:

3.7.1 Cleaning - Cleaning shall be as specified in 3.2.

3.7.2 Packaging - Packaging shall be as specified in 3.3, except as follows:

3.7.2.1 The desiccant specified in 3.3.1 may be omitted.

3.7.2.2 The water-vaporproof bag specified in 3.3.1.4 may be omitted.

3.7.2.3 A fiberboard box conforming to Specification LLL-B-631 or LLL-B-636 may be used in lieu of the boxes specified in 3.3.3. The fiberboard box shall be closed as specified in the box specification.

3.7.3 Packing - Packing shall conform to 3.4, except as follows:

3.7.3.1 The shipping container shall conform to Specification NN-B-601 or NN-B-621.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

3.7.3.2 Inside surfaces of each wood shipping container shall be lined with flexible waterproof barrier material conforming to Specification JAN-P-125.

3.7.4 Immobilizing - Immobilizing shall be as specified in 3.5.

3.7.5 Identification and marking - Identification and marking shall be as specified in 3.6, except that the serial numbers in the identification data on the unit packages, the packing list on the shipping container and the Method II labels may be omitted.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Sampling - A preproduction sample pack shall be made in accordance with this specification. The sample pack shall be inspected and approved by a Government inspector prior to packaging and packing the items for shipment. Production packs shall be tested at random where the Government inspector considers it necessary to conduct tests to assure conformance with the requirements of this specification.

4.2 Inspection - All methods and materials shall be subject to inspection by a Government inspector, who shall be afforded proper facilities for determining compliance with this specification and the applicable specifications.

4.3 Test procedures - The preproduction sample pack and any production packs selected for tests shall, at the discretion of the Government inspector, be tested in accordance with the applicable tests specified in Specification MIL-P-116.

5. PREPARATION FOR DELIVERY

(Not applicable)

6. NOTES

6.1 Ordering data - Invitation for bids and contracts or orders should specify the title, number and date of this specification, the type of shipment involved, and the type of packaging and packing required.

6.2 The marking of overseas shipping containers by Army Installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, "Marking of Oversea Supply".

6.3 The following indicates the stock number to be added in the identification data:

Item	Stock No.
Telescope, B.C., M65, W/E	F001-6785577
Consisting of:	
1 Telescope, B.C., M65	F001-7579932
1 Adapter, Telescope, M14	F259-6582520
1 Brush, camel hair	38-B-670
1 Brush, sash oval	38-B-3325
1 Case, Carrying, M45	F259-6583104

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.


	Item	Stock No.
1	Chest, Packing, M39A1	F259-7694908
1	Cover, assy.	F259-6583358
1	Light, Instrument, M28	F205-6582819
1	Mount, Telescope, M48	F001-6583165
1	Tripod, M10	F101-6545927
1	Tripod, M17	F259-6574387
1	Wrench	41-W-2964-450

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:

Army - Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

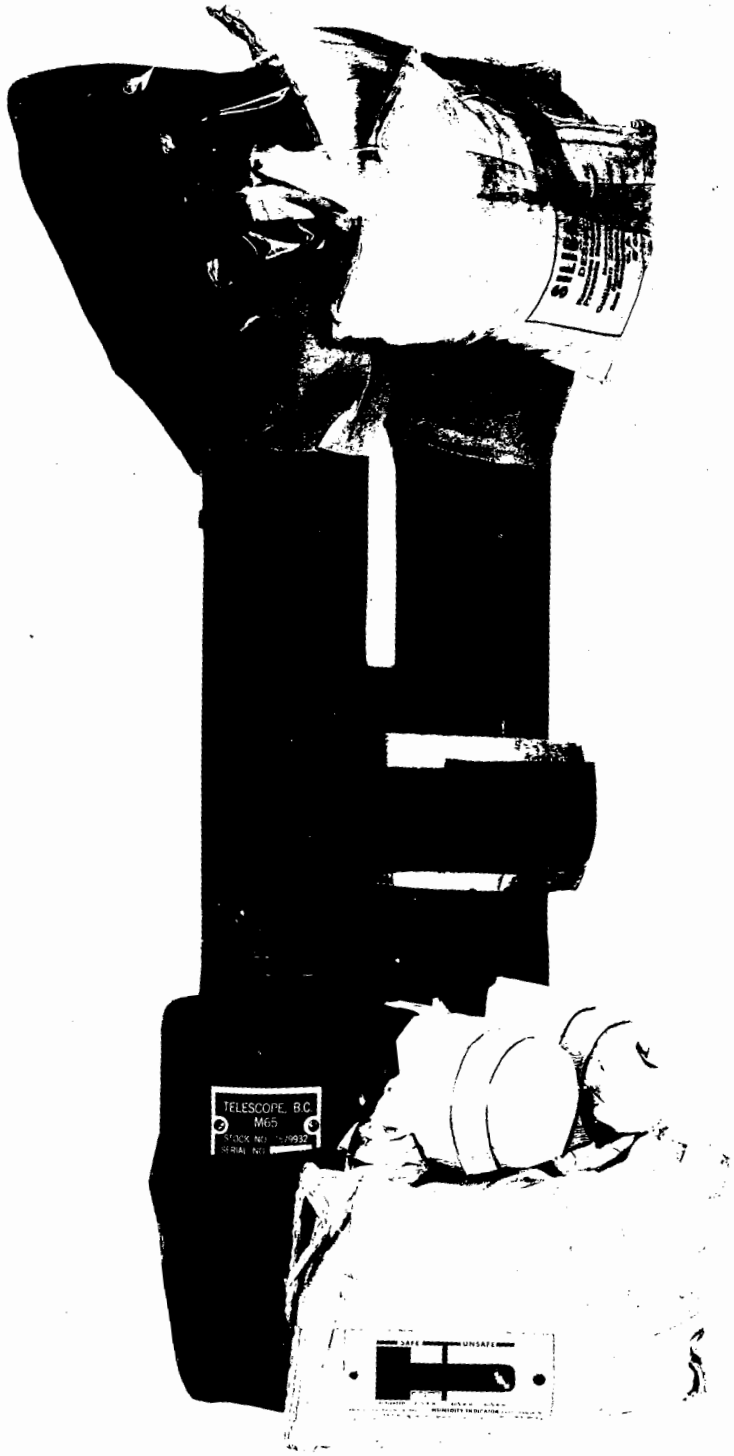

NEG. #20131-6P 7/31/52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, B.C., M65, W/E - Prepared telescope ready to be placed in water-vaporproof barrier bag. Note humidity indicator.

FIGURE 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.



Neg.#20131-2P 7-31-52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, B.C., M65, W/E - Telescope in water-vaporproof bag, positioned in modified carrying chest
FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

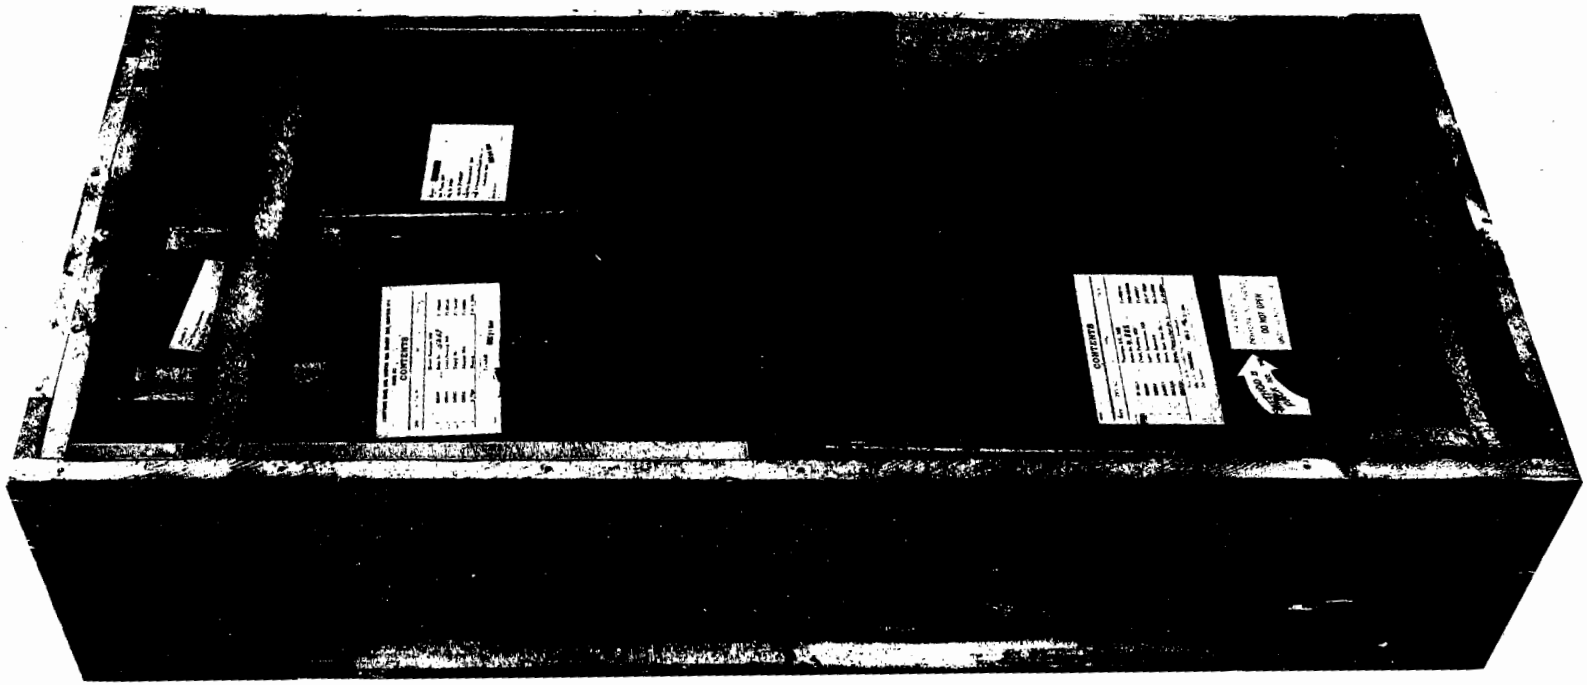

Neg.#20131-5P 7-31-52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, B.C., M65, W/E - Packing the telescope with equipment
FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.

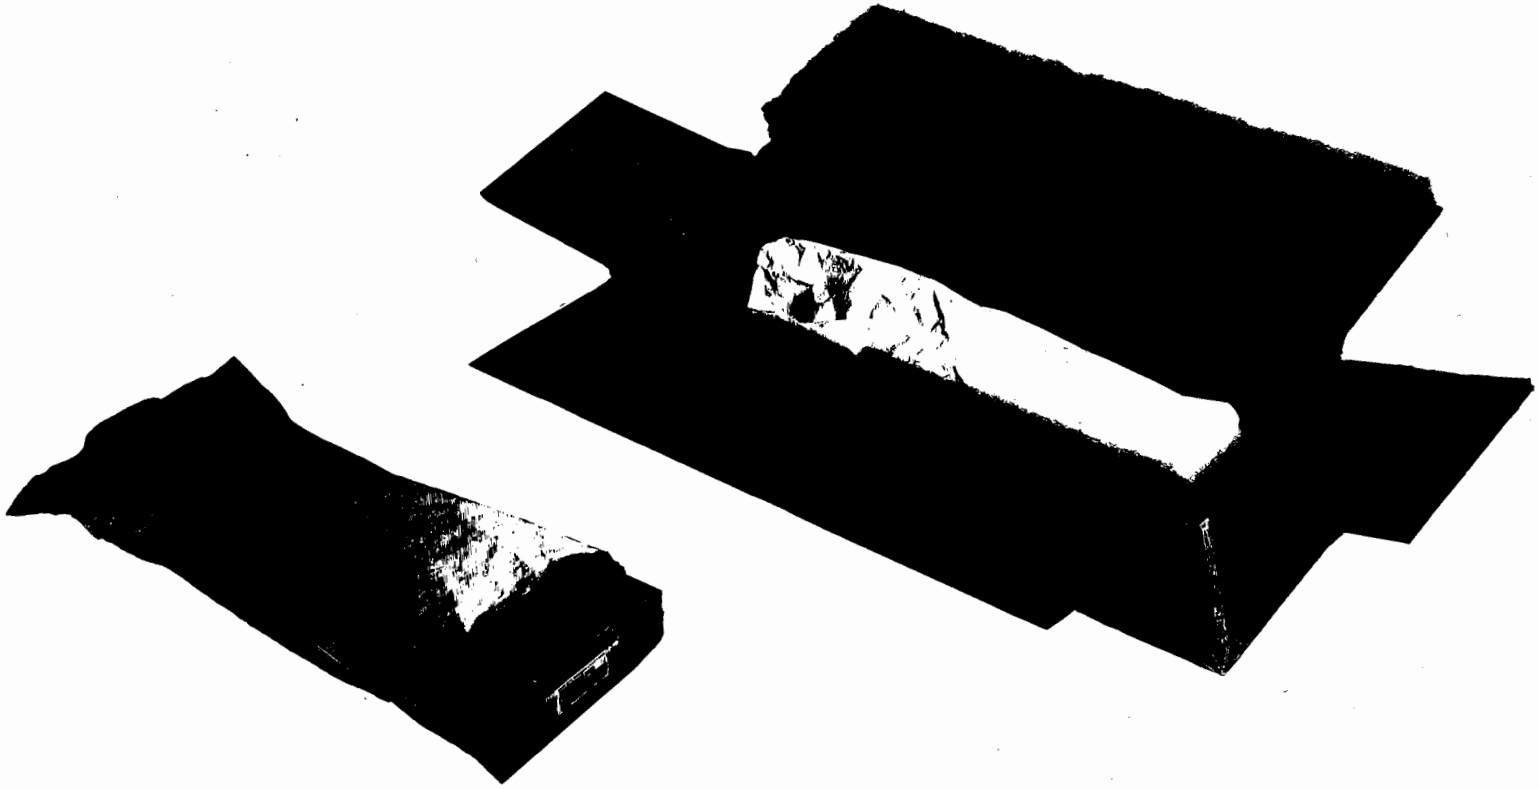

NEG. #22976 9/15/52 FRANKFORD ARSENAL ORD. CORPS

TELESCOPE, B.C., M65 - Unit packaging the telescope without equipment. Note location of humidity indicator.
FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:43Z
Check the source to verify that this is the current version before use.