MILITARY SPECIFICATION

PACKAGING OF SIGHT, RING, 7686254

1. SCOPE

1.1 This instruction covers the packaging, packing, and marking for interplant shipment, domestic shipment with storage, and overseas shipment for Sight, Ring, 7687254, Ord. Dwg. No. F7686254, Stock No. F002-7686254.

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND PUBLICATIONS.

2.1 The following specifications and standard, of the issue in effect on date of invitation for bids, form a part of this instruction.

SPECIFICATIONS

Federal

UU-T-111	- Tape; Paper, Gummed (Sealing and Securing).
LLL-B-631	- Boxes; Fiber Corrugated (For Domestic Shipment).
LLL-B-636	- Boxes; Fiber, Solid (For Domestic Shipment).
LLL-F-291	- Fiberboard, Corrugated, Single Face, Flexible.

Military

JAN-P-101	- Packaging and Packing for Overseas Shipment - Adhesive, Water-Resistant, For Sealing Fiberboard Boxes.
JAN-P-106	- Packaging and Packing for Overseas Shipment - Boxes; Wood, Nailed.
JAN-P-108	- Packaging and Packing for Overseas Shipment - Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
MIL-P-116	- Preservation, Method of
JAN-B-121	- Barrier-Materials, Greaseproof.
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
MIL-C-11796	- Compound, Corrosion Preventive, Petrolatum Type, Hot Application.

STANDARD

Military

MIL-STD-129	- Marking of Shipments.

(Copies of specifications and standard required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:44Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Disassembly.

3.1.1 Thumbscrews A7686286 and the brackets containing sights C7686263 and sights B7686266 shall be removed from the ring sight.

3.1.2 The sights shall be removed from the brackets and the nuts shall be replaced on the peep sights.

3.2 Cleaning. - All exposed unpainted steel parts shall be thoroughly cleaned in accordance with method C-4 followed by method C-8 of Specification MIL-P-116, and the cleaned surfaces shall be dried. When an interplant shipment is to be made, sights 7686263 shall not be cleaned.

3.3 Preservation.

3.3.1 The cleaned surfaces shall be coated with soft film preservative conforming to class 3 of Specification MIL-C-11796.

3.3.2 All preserved surfaces, and sights C7686263, whether coated with rust preventive compound or not, shall be wrapped or covered with greaseproof barrier material conforming to grade A or C of Specification JAN-B-121.

3.4 Packaging.

3.4.1 The two ring sights shall be sandwiched between three sheets of water-resistant corrugated fiberboard equivalent to that used for Specification JAN-P-108 boxes.

3.4.2 The disassembled brackets and peep sights shall be individually wrapped with flexible single faced corrugated fiberboard conforming to type 1 or 2 of Specification LLL-F-291, and the wraps shall be secured with gummed tape conforming to class 1 or 2 of Specification UU-T-111.

3.4.3 The mounting hardware and thumbscrews shall be placed in a kraft paper bag and the bag shall be closed.

3.4.4 The wrapped brackets, peep sights, and the bagged items shall be immobilized in a fiberboard box conforming with any compliance symbol, any style except FTC of Specification JAN-P-108. The box shall be closed by applying water-resistant adhesive, conforming with Specification JAN-P-101, over all areas of contact between the flaps, and by covering all seams, including the manufacturer's joint, with pressure-sensitive tape conforming to Specification JAN-P-127. When an interplant shipment is to be made the fiberboard box may conform to style RSC or OLC of Specification LLL-B-631 or LLL-B-636, and shall be closed by covering all seams with gummed tape conforming to class 2 or 3 of Specification UU-T-111.

3.5 Packing.

3.5.1 The ring sight shall be immobilized in a wood shipping container conforming to style 4 of Specification JAN-P-106. When an interplant or domestic shipment and storage shipment is to be made the straps shall not be stapled. The ring sight shall be immobilized in the shipping container by means of two wood yokes as illustrated in figure 1. To prevent lateral motion of the ring sight, the wood yokes shall butt up against the bottom of the mount. The two horizontal wood cleats shall butt up against the bottom of the mount to prevent the mount from rotating in the yokes. Approximately 1/2 inch clearance shall be provided between the ends and top of the ring sight and the interior surfaces of the shipping container.

3.5.2 The sandwiched ring sights shall be securely stapled to the bottom of the shipping container.

3.5.3 The fiberboard box containing the peep sights, brackets, hardware, and thumbscrews shall be secured in the shipping container.

3.6 Marking.

3.6.1 Each fiberboard box shall be marked as follows:

PEEP SIGHTS
BRACKETS
MOUNTING HARDWARE AND THUMBSCREWS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:44Z
Check the source to verify that this is the current version before use.

3.6.2 Each package containing the ring sights shall be marked "RING SIGHTS".
3.6.3 Except as noted in 6.2 and as specified herein, the shipping container shall be marked in accordance with Standard MIL-STD-129.
3.6.4 An official Ordnance Corps inspection seal (escutcheon) shall be placed on each shipping container adjacent to the permanent markings. The inspecting Ordnance District's symbol, such as NYOD, BOD, etc., shall be added on or below each escutcheon.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES.
4.1 Inspection. - All methods and materials shall be subject to inspection by U. S. Government inspectors who shall be afforded proper facilities for determining compliance with this instruction and the applicable specifications. The passing as satisfactory of any phase of the completed pack shall not relieve the contractor of his responsibility to submit a finished pack free from faulty workmanship or material.
4.2 Test procedures. - At the discretion of the Government inspector, the preservative retention test and the rough handling tests specified in Specification MIL-P-116 may be required to assure compliance with the requirements and intent of this instruction.


5. PREPARATION FOR DELIVERY
Not applicable

6. NOTES
6.1 Ordering data. - Invitation for bids and contracts should specify the title, number, and date of this specification and the type of shipment involved.
6.2 Special marking. - The marking of overseas shipping containers by army installations should be in accordance with Department of the Army and Air Force Manual SR 746-30-5, Marking of Oversea Supply.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government, thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army-Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:44Z
Check the source to verify that this is the current version before use.

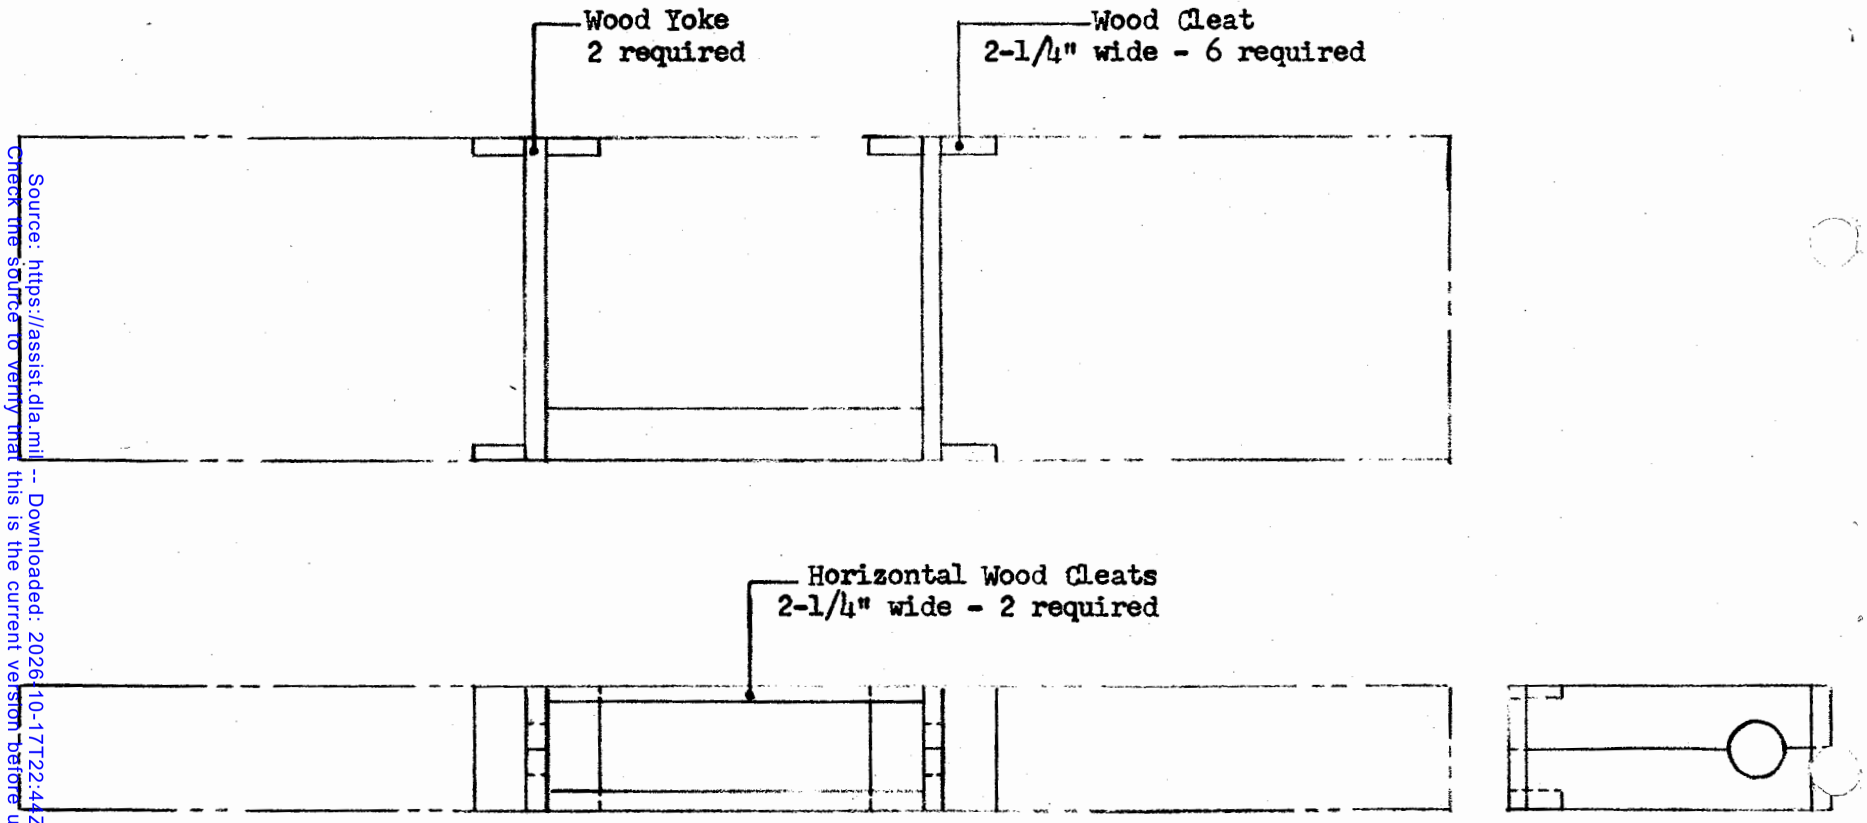

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T22:44Z
Check the source to verify that this is the current version before use.

NOTE:
All lumber shall be nominal 1 inch, and conform to the wood requirements of Specification JAN-P-106.

FIGURE 1
BLOCKING AND BRACING OF SIGHT, RING, 7686254 IN SHIPPING CONTAINER