
MIL-C-11272/16A(USAF)
6 JULY 1973
SUPERSEDING
MIL-C-11272/16(USAF)
12 January 1973

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, GLASS DIELECTRIC, STYLES CY81 AND CY82

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Military Specification MIL-C-11272.

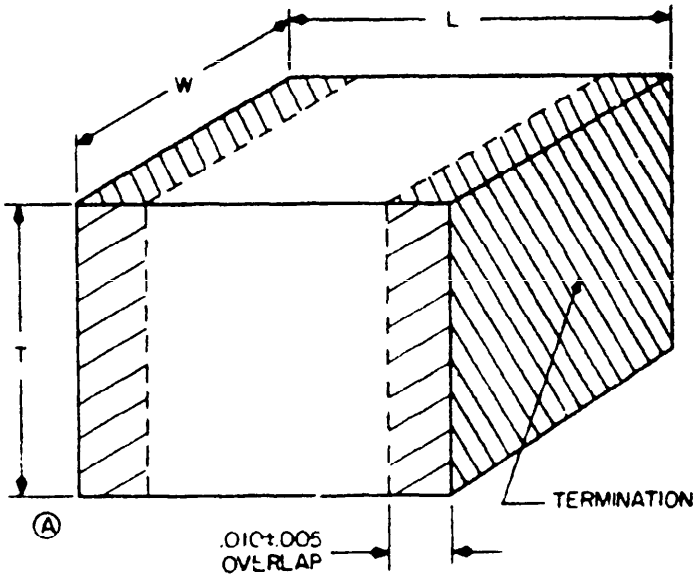

Ⓐ

Dimensions				
			T	
Style	L	W	Min.	Max.
CY81	.055 ± .010	.055 ± .010	.030	.055
CY82	.055 ± .020	.055 ± .010	.030	.055

INCHES	MM
.005	.13
.010	.25
.020	.51
.030	.76
.055	1.40

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓐ denotes changes.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:52Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I.

Type designation 1/	Capacitance	Rated voltage	Capacitance tolerance available
	pF	Volts, dc	
CY8-D0R1B	0.1	50	B
CY8-D0R2B	0.2		B
CY8-D0R3-	0.3		B, C
CY8-D0R4-	0.4		B, C
CY8-D0R5-	0.5		B, C, D
CY8-D0R6-	0.6		
CY8-D0R7-	0.7		
CY8-D0R8-	0.8		
CY8-D0R9-	0.9		
CY8-D1R0-	1.0		
CY8-D1R1-	1.1		
CY8-D1R2-	1.2		
CY8-D1R3-	1.3		
CY8-D1R4-	1.4		
CY8-D1R5-	1.5		
CY8-D1R6-	1.6		
CY8-D1R7-	1.7		
CY8-D1R8-	1.8		
CY8-D1R9-	1.9		
CY8-D2R0-	2.0		
CY8-D2R1-	2.1		
CY8-D2R2-	2.2		
CY8-D2R4-	2.4		
CY8-D2R7-	2.7		
CY8-D3R0-	3.0		
CY8-D3R3-	3.3		
CY8-D3R6-	3.6		
CY8-D3R9-	3.9		
CY8-D4R3-	4.3		
CY8-D4R7-	4.7		
CY8-D5R1-	5.1		
CY8-D5R6-	5.6		
CY8-D6R2-	6.2		B, C, J, K, M
CY8-D6R8-	6.8		
CY8-D7R5-	7.5		
CY8-D8R2-	8.2		
CY8-D9R1-	9.1		F, G, J, K, M
CY8-D100-	10		
CY8-D110-	11		
CY8-D120-	12		
CY8-D130-	13		
CY8-D150-	15		
CY8-D160-	16		
CY8-D180-	18		
CY8-D200-	20		
CY8-D220-	22		
CY8-D240-	24		
CY8-D270-	27		
CY8-D300-	30		
CY8-D330-	33		
CY8-D360-	36		
CY8-D390-	39		

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. - Continued

Type designation 1/	Capacitance	Rated voltage	Capacitance tolerance available
	pF	Volts, dc	
CY8-D430-	43	50	F, G, J, K, M
CY8-D470-	47	↓	↓
CY8-D510-	51		
CY8-D560-	56		
CY8-D620-	62		
CY8-D680-	68		
CY8-D750-	75		
CY8-D820-	82		
CY8-D910-	91		
CY8-D101-	100	↓	↓

1/ Complete type designation will include an additional digit to indicate the style, and an additional letter symbol to indicate the capacitance tolerance, where applicable.

REQUIREMENTS

Design and construction:
Dimensions and configuration: See figure and table I.
Case type: Multi-layer, unencapsulated, monolithic.
Material - Porcelain.
Terminations:
Style CY81 - Metallized.
(A) Style CY82 - Solder coated, 372° F, 62 Sn, 36P6, 2 percent Ag.
(A) Inspection conditions: All visual examinations shall be performed using a stereo microscope having a minimum magnification of 20 power.
Capacitance (Cap.) value: See table I.
Cap. tolerance: See table I.
Rated voltage: See table I, characteristic D.
Operating temperature range: -55 °C to +125 °C.

Insulation resistance (IR):
At +25 °C: 10^6 megohms, minimum.
At +125 °C: 10^5 megohms, minimum.

(A) Quality factor: 10,000. 1 MHz -0 +100 kHz.

Life:
At +25 °C and +125 °C:
IR - Not less than initial requirement.
(A) Cap. - Change not more than 0.2% or 0.2 pF, whichever is greater, from the nominal value.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:52Z
Check the source to verify that this is the current version before use.

Ⓐ **Temperature coefficient and capacitance drift.** See table II.

TABLE II. Temperature coefficient and capacitance drift.

Temperature coefficient	Capacitance drift (-55 to + 125 °C)
Parts/million/°C 90 ±20	0.1 percent or 0.1 pF whichever is greater

NOTE: These capacitors are intended for use in RF solid-state circuitry up to and including 25 gigahertz, and cannot be replaced in the field.

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-F196-1)

★ U. S. GOVERNMENT PRINTING OFFICE: 1973-713-144/382

Source: https://assist.dla.mil -- Downloaded: 202640-17T15:52Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

☆ U.S. GOVERNMENT PRINTING OFFICE 1973 716-166 3983 2

Source: https://assist.dla.mil -- Downloaded: 202610-17T15:52Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

ASD/ENYES
Wright-Patterson AFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T15:52Z
Check the source to verify that this is the current version before use.