MIL-B-14075B(ME)
2 December 1975
SUPERSEDING
MIL-B-14075A(MO)
10 January 1966

MILITARY SPECIFICATION

BAG, COOPERS' TOOLS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a cooper's bag fabricated of cotton duck cloth.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

T-C-571	- Cords, Cotton; General and Special Purpose, Sash and Venetian Blind.
T-T-616	- Treatment: Mildew Resistant, for Rope and Cord.
V-T-276	- Thread, Cotton.
FF-T-1813	- Tack.
NN-P-530	- Plywood, Flat Panel.
QQ-S-781	- Strapping, Steel, and Seals.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied Yarns, Army and Numbered.
CCC-D-950	- Dyeing and Aftertreating Processes For Cotton Cloths.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Military

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-W-530	- Webbing, Textile, Cotton, General Purpose, Natural or in Colors.

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

MIL-T-3530	- Thread and Twine, Mildew Resistant or Water Repellant Treated.
MIL-G-16491	- Grommet, Metallic.

STANDARDS

Federal

FED. STD. No. 751	- Stitches, Seams, and Stitchings.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MS27983	- Fasteners, Snap, Style 4.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The bag shall be as shown in Figure 1 and as specified herein. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer.

3.2 First article (first-produced bag). The supplier shall furnish one or more bags as specified (see 6.2) for examination and testing within the time frame specified (see 6.2) to prove that his production methods will produce bags that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein and as shown in Figure 1. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3.1 Cotton duck. Sides, bottom, and side pocket of the bag shall be cotton duck conforming to CCC-C-419, Type III, weight 8.25 ounces per square yard, and finished in accordance with CCC-D-950, Type I, Class B, Inhibitor f, Olive Drab 7.

3.3.2 Plywood insert. The plywood insert shall be one-piece construction of Douglas fir conforming to NN-P-530, Group B, and shall be five-ply, Exterior Type, Grade AC.

3.3.3 Grommets. Grommets conforming to MIL-G-16491, Type II, Class 1, Size 4, shall be tightly set in the material.

3.3.4 Drawstring. The drawstring shall be braided cotton sash cord conforming to T-C-571, Type IV, except that the drawstring shall be rendered fungus resistant in accordance with T-T-616.

3.3.5 Fasteners. The buttons and sockets shall be in accordance with MS27983-1 and MS27983-2, and shall be installed on the flap for the side pocket. The studs and eyelets shall be in accordance with MS27983-3 and MS27983-4, and shall be installed on the side pocket. The fasteners shall be tightly set in the material.

3.3.6 Carrying strap. The carrying strap shall be fabricated from webbing conforming to MIL-W-530, Type II, Class 1b.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

3.3.7 Carpet tacks. Tacks conforming to FF-T-1813, Style 3, N10, shall be used to secure the plywood insert to the bag.

3.3.8 Thread. Thread shall conform to V-T-276, Type IB3 for the needle and Type IA3 for the bobbin. Size for both types shall be 14/4. When overedging is performed, the thread size shall be 24/4 for Type IB3 and 26/4 for Type IA3. Thread shall be fungus resistant in accordance with MIL-T-3530, Type I, Class 1.

3.4 Construction.

3.4.1 Stitches, stitching, and seams. Stitches, stitching, and seams shall conform to FED. STD. No. 751. All raw edges shall be overedge stitched with Stitch Type 503. Side seams shall be Type LSc-3 with Type 301 or 401 stitches. The bottom seam shall be Type SSa-2 with Type 301 stitches. The pocket and flap shall be attached with Type 301 stitches, using Seam Type LSd-2. Stitching shall be not less than seven stitches per inch and shall be backstitched at ends to prevent raveling, except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained to prevent loose stitching and to insure embedding of the lock in the center of the materials. Thread breaks in stitching shall be overstitched a minimum of one inch at each break. Stitching rows shall be straight and parallel to the seam edges or the edge of the materials, as applicable. A deviation of plus or minus 1/16 inch may be allowed in the normal distance of the stitches from the edge and shall be maintained in any row within a tolerance of plus or minus 1/32 inch.

3.4.2 Carrying strap. The stitching of the carrying strap to the bag shall withstand a pull of not less than 150 pounds in any direction without ripping.

3.4.3 Bag seams. The bag seam stitching shall withstand a pull of not less than 50 pounds against the seam without ripping.

3.4.4 Bag bottom. The bag bottom seam stitching shall withstand a load of not less than 150 pounds without ripping.

3.5 Identification marking. Each bag shall be identified in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The bag shall be clean and free from rough edges, dirt, stain, bleached spots, and other visible faults, irregularities, or defects.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The supplier is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. Inspections shall be classified as follows:

(a) First-produced bag inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 First-produced bag inspection.

4.3.1 Examination. The first-produced bags shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first-produced bags shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination and tests shall be in accordance with MIL-STD-105, Inspection Level S-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

4.4.2 Examination.

4.4.2.1 Samples. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. AQL shall be 4.0 percent defective for major defects and 6.5 percent defective for minor defects.

4.4.3 Tests.

4.4.3.1 Samples. Samples selected in accordance with 4.4.1 shall be tested as specified in 4.5.2. AQL shall be 4.0 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. The bag shall be examined as specified herein for the following defects:

Major

101. Dimensions not as specified.
102. Grommets not set as specified.
103. Fasteners not set as specified.
104. Incorrect cutting of material.
105. Stitches, stitching, or seams not as specified.
106. No backstitching to lock threads.
107. Materials not as specified.
108. Cut, rip, or tear in duck or webbing.
109. Holes or burns in duck.

Minor

201. Raveled threads.
202. Loose stitching.
203. Missing or torn stitching.
204. Stitching rows not straight and parallel.
205. Any marking missing, incorrect, illegible, or incomplete.
206. Tacks missing or not properly spaced.
207. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Carrying strap. A pull of not less than 150 pounds shall be applied to the carrying strap stitches in all directions. Nonconformance to 3.4.2 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

4.5.2.2 Bag seams. A pull of not less than 50 pounds shall be applied to the bag seams in all directions. Nonconformance to 3.4.3 shall constitute failure of this test.

4.5.2.3 Bag bottom. The bag shall be loaded with not less than 150 pounds of appropriate test material and a vertical lift shall be applied to the carrying strap. The loaded bag shall be lifted free of any support and held suspended by the carrying strap for not less than 5 minutes. Nonconformance to 3.4.4 shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

110.	Materials, methods, and containers not as specified.	Each incorrect material, method, or container shall be considered one defect.
111.	Bags not folded into a compact bundle and the bundle not secured as specified for Levels A and C.	
112.	Strapping not as specified for Level A.	
113.	Closure of fiberboard boxes not as specified for Level B.	
114.	Marking illegible, incorrect, or incomplete.	

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C, as specified (see 6.2).

5.1.1 Level A. Each bag shall be folded into a compact bundle and the bundle shall be secured with cotton tape or twine. Each folded and secured bag shall be preserved in accordance with MIL-P-116, Method IC-1 or IC-3.

5.1.2 Level C. Each bag shall be folded into a compact bundle and the bundle shall be secured with cotton tape or twine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be Level A, B, or C, as specified (see 6.2).

5.2.1 Level A. The bags, packaged as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-601, Overseas Type, Grade B, style optional. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable; and, unless otherwise specified herein, shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.2.2 Level B. The bags, packaged as specified in 5.1, shall be packed together in a close-fitting box conforming to PPP-B-636, V3c, style optional. The gross weight shall not exceed the weight limitation of the box specification. Closure shall be in accordance with Method V of the appendix to the box specification.

5.2.3 Level C. The bags shall be packed to assure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

5.3 Marking. Packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The cooper's bag is intended for carrying coopering and shoring tools and material.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced model, and number of bags required (see 3.2).
(c) Level of preservation and packaging and level of packing required (see 5.1 and 5.2).
(d) When Finish A strapping is required (see 5.2.1).

6.3 First-produced bags. Any changes or deviations of production bags from the approved first-produced bag during production will be subject to the approval of the contracting officer. Approval of the first-produced bag will not relieve the supplier of his obligation to furnish bags conforming to this specification.

Custodian:

Army - ME

Preparing activity:


Army - ME

Review activity:

Army - GL

Project No. 5140-A063

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

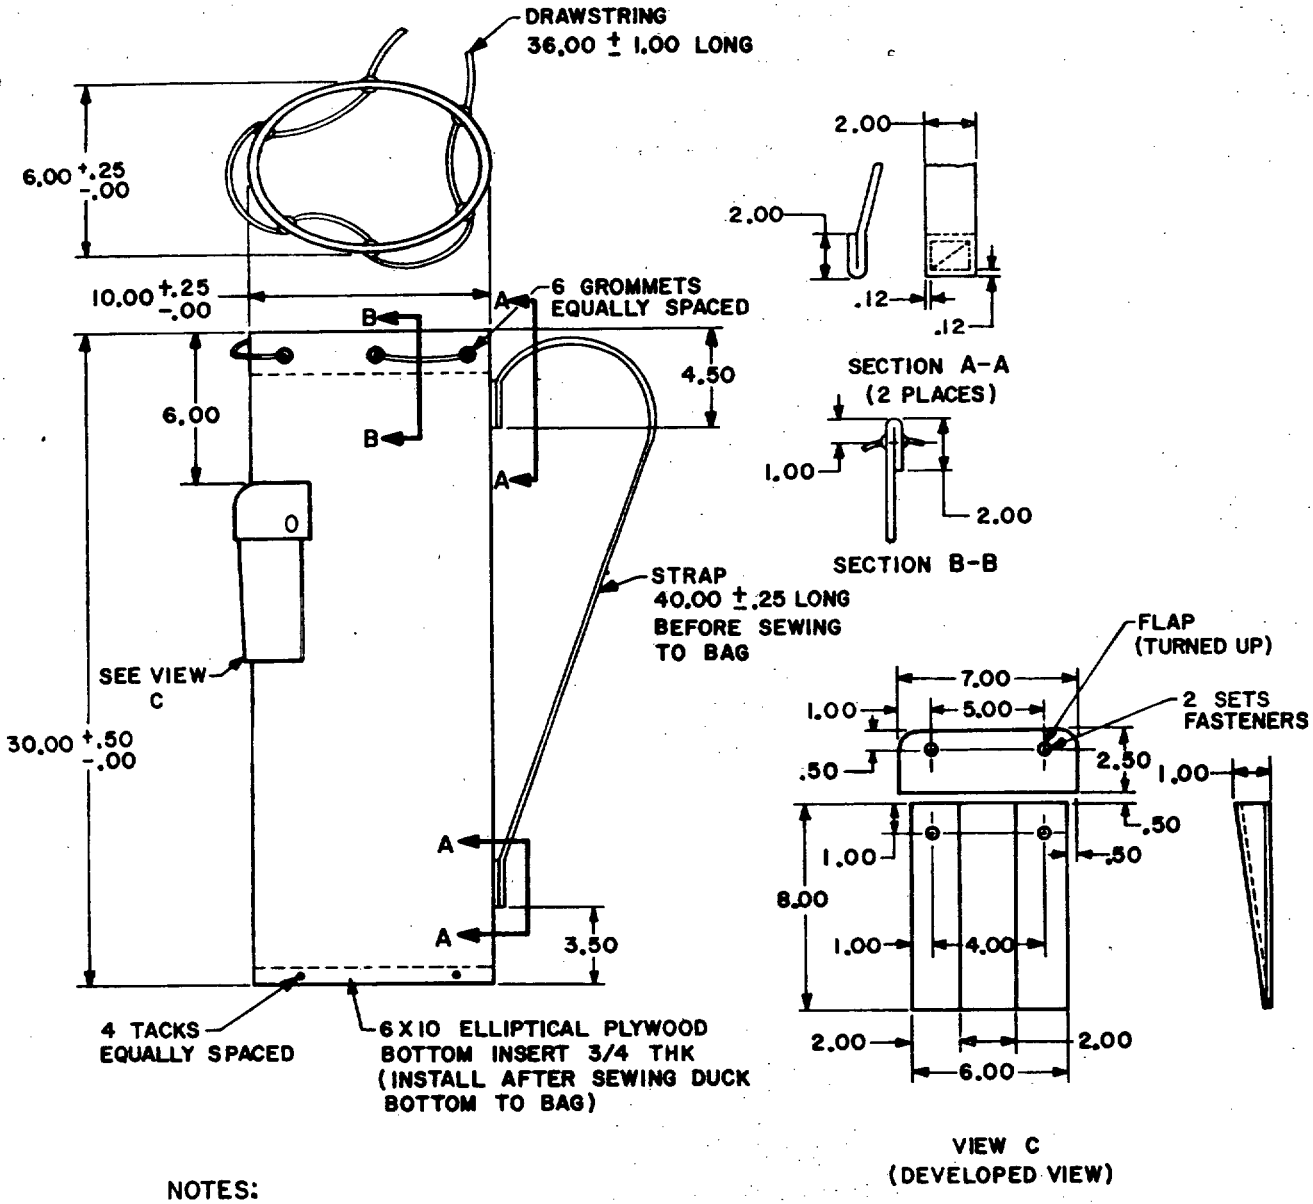

NOTES:

1. DIMENSIONS ARE IN INCHES
2. UNLESS OTHERWISE SPECIFIED: TOLERANCES SHALL BE ± .12

FIGURE 1. BAG, COOPERS' TOOLS

X-802A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-B-14075B(ME) Bag, Coopers' Tools

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:50Z
Check the source to verify that this is the current version before use.