MIL-P- 14100(Ord)
27 June 1955
SUPERSEDING
PA-PD-522
30 July 1954
PA-PD-218
23 April 1952

MILITARY SPECIFICATION

PRIMERS, STAB TYPE,
LOADING, ASSEMBLING, AND PACKING

1. SCOPE

1.1 This specification covers the loading, assembling, and packing of the following stab type primers for use in various types of ammunition:

M26
M41A1
M45
M55
M56

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards, drawings, and publications, and all drawings and specifications referenced thereon, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

L-P-416	-Plastics; Polystyrene, Molded
QQ-A-561	-Aluminum Alloy 2S; Plate and Sheet
QQ-S-633	-Steel, Carbon; Bars (General Purpose)

MILITARY

MIL-G-2550	-General Specification for Ammunition Except Small Arms Ammunition
MIL-P-12059	-Powder, Sulfurless Meal
MIL-P-14066	-Plastic Compounds, Molding, Ethyl Cellulose; Molded and Extruded Shapes

U. S. ARMY

57-136	-Steel, Carbon and Alloy; Sheets and Strips

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-10 -Surface Roughness, Waviness and Lay
URAX-6 -Ordnance Finishes (Surface Roughness)

ARMY

30-1-7 -Standard for Dimensioning and Tolerancing

DRAWINGS

ORDNANCE CORPS

73-8-250 -Primer, M41A1. Assembly and Details
74-2-39 -Primer, Percussion, M26. Assembly and Details
74-2-76 -Primer, M45. Assembly and Details
74-2-83 -Primer, Percussion, M55. Assembly and Details
74-2-84 -Primer, Percussion, M56. Assembly and Details
81-3-56 -Fixture, Testing, Detonator Sensitivity Details
81-3-150 -Fixture, Testing, Detonator Sensitivity Assembly

PUBLICATIONS

ORDNANCE CORPS

ORD-SIP-M16-8-Primers, Type, Stab, Loaded

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.-Material and parts shall be in accordance with applicable specifications and drawings.

3.2 The primers shall comply with all requirements specified on the following drawings, as applicable, and all drawings referenced thereon, and with all requirements specified in applicable specifications:

73-8-250 74-2-76 74-2-84
74-2-39 74-2-83

3.3 Sulfurless meal powder (where applicable).-The moisture content of the sulfurless meal powder at the loading station at the time of loading the primers shall not exceed the amount specified in Specification MIL-P-12059 when determined as specified in 4.4.

3.4 Lead azide (where applicable).-The moisture content of the lead azide at the loading station at the time of loading the primers shall not exceed 0.50 percent when determined as specified in 4.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

3.5 Primer mixture.-The moisture content of the primer mixture at the loading station at the time of loading the primers shall not exceed 0.30 percent when determined as specified in 4.6.1.

3.6 Functioning.

3.6.1 Sensitivity.-The primer assemblies shall function satisfactorily as evidenced by perforation of the aluminum disc to not less than the minimum diameter indicated in Table I, when tested as specified in 4.7.1.

TABLE I

STANDARD STEEL BALL (See 6.2)

PRIMER ASSEMBLY	BALL DIAMETER (INCHES)	BALL WEIGHT (OUNCES)	HEIGHT OF DROP (INCHES)	MIN. DIAMETER OF PERFORATED HOLE IN ALUMINUM DISC (INCHES) (For thickness of disc see figure 1)
M26	1 3/16	3.95	1 1/2	1/4
M41A1	1 3/16	3.95	3	5/16
M45	1 3/16	3.95	3	1/4
M55	1 3/16	3.95	3	1/4
M56	1 3/16	3.95	3	1/4

3.6.2 Waterproofness.-The primer assemblies shall be waterproof as evidenced by normal functioning after water immersion when tested as specified in 4.7.2.

3.7 Check test for possible deterioration.-If the total elapsed time between original acceptance of any primer lot and assembly of that lot into the ammunition component with which it is to be issued exceeds one year or if the primers have been subjected to adverse conditions at any time since previous tests, the primer lot shall be subjected to, and must satisfactorily pass, the check test outlined in 4.8 immediately before the lot is used. (This test does not normally apply to primers used in subsequent assembly operations within one year of the original acceptance test.)

3.8 Workmanship.-All parts shall be free of chips, dirt, grease, rust, and other foreign material. The cleaning method used shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Lot.-A lot shall consist of all primers loaded and assembled by one manufacturer under one contract, in one unchanged process in accordance with the same drawing, same drawing revision, same specification and same specification revision. The primer lot shall be so controlled that all primers produced by any one production unit (assemblies produced on one machine, or one assembly line during an eight hour shift) may be readily segregated at any time prior to acceptance. (This may be accomplished in any convenient manner which insures easy identification without marking on, or otherwise changing the appearance of the primer itself.) Each lot shall contain:

a. metal parts or metal parts assemblies of one interfix lot number from one manufacturer

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

b. primer mixture consisting of batches blended by the same process, each ingredient being from one lot only

c. lead azide (where applicable) of one manufacturer bearing the same interfix number

d. sulfurless meal powder (where applicable) of one manufacturer bearing the same interfix lot number.

4.2 Sampling.-Number of samples, acceptance and rejection criteria used for determination of lot acceptance for tests as specified in 4.4, 4.5, 4.6.1, 4.7.1, and 4.7.2 shall be in accordance with Standard Inspection Procedure ORD-SIP-M16-8. Sampling of component material is specified in 4.6.2 covering tests of material.

4.3 Inspection.-Inspection shall be as specified in Specification MIL-C-2550.

4.4 Determination of moisture content of sulfurless meal powder.-The allowable moisture content of the sulfurless meal powder and the method of determining the percentage thereof shall be in accordance with Specification MIL-P-12059.

4.5 Determination of moisture content of lead azide.-A tared dried aluminum dish 2 inches in diameter shall be covered with a sheet of polytetrafluoroethylene (see 6.3), 2 1/2 inches square and sufficiently flat to form a tight cover. An accurately weighed portion of approximately two grams of the sample shall be transferred to the moisture dish while both the cover and dish are on the balance pan. The dish and contents shall be transferred to an oven and dried at $95^{\circ} \pm 2^{\circ}C$ for 2 hours. The cover shall be placed in a sulfuric acid desiccator during the drying period. After drying, the dish shall be quickly transferred to the desiccator and allowed to cool to room temperature. The polytetrafluoroethylene (see 6.3) cover shall be placed on the dish and the assembly weighed. The loss in weight shall be calculated to percentage of moisture to determine compliance with 3.4 as follows:

$$\text{Percentage of moisture} = \frac{(A-B)}{A} 100$$

where:

A = the weight of the sample before drying

B = the weight of the sample after drying

4.6 Test of primer mixture.

4.6.1 Moisture content.-A known weight, 0.40 to 0.70 gram portion of the sample primer mixture shall be dried to constant weight at 55° to $65^{\circ}C$, or in a desiccator containing calcium chloride. The loss in weight shall be calculated as the percentage of moisture to determine compliance with 3.5.

4.6.2 Composition.

4.6.2.1 Potassium chlorate.

4.6.2.1.1 Preparation of solutions.

4.6.2.1.1.1 Solution No. 1.-To approximately 800 ml of distilled water in a one liter amber glass reagent bottle, 40 gm of potassium sulfocyanate shall be added. The bottle shall be sealed with a rubber stopper and the reagent bottle and contents shaken until the solid material is dissolved. To this solution, 1.0 gm of lead thiocyanate, 1.0 gm of antimony sulfide and 1.0 gm of lead azide shall be added. The bottle shall again be stoppered and the reagent bottle and contents vigorously shaken for several minutes and then allowed to stand overnight. Portions of the saturated solution shall be filtered before using.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

4.6.2.1.1.2 Solution No. 2.-To approximately 400 ml of distilled water in a one-half liter amber glass reagent bottle, 1.0 gm of lead thiocyanate, 1.0 gm of antimony sulfide and 1.0 gm of lead oxide shall be added. The bottle shall be sealed with a rubber stopper and the reagent bottle and contents vigorously shaken for several minutes and then allowed to stand overnight. Portions of the saturated solution shall be filtered before using.

4.6.2.1.2 Procedure.-A portion of approximately 1.0 gm of the sample shall be accurately weighed directly into a tared 30 ml sintered glass crucible of medium porosity. From a burette 3.0 ml of solution No. 1 shall be added to the crucible. The solution shall be swirled for exactly 1 minute taking care not to spill any liquid, aspirated with suction and the bottom of the crucible wiped dry, using tissue paper. The washing shall be continued using one more 3.0 ml portion, two 2.0 ml and two 1.0 ml portions, making a total of 12.0 ml. The crucible shall be removed and the bottom of the crucible, the funnel, the adapter and the suction flask washed with water. A test tube shall be placed in the flask and the stem of the filtering funnel inserted into the test tube. The crucible and contents shall be washed with one 1.0 ml portion of Solution No. 1 as above, and aspirated with suction, catching the filtrate in the test tube. The test tube shall be removed, 1.0 ml of distilled water added and the chlorate ion determined as follows:

The tube shall be inclined at an angle of about 45 degrees and from a dropper about 0.5 ml of a solution containing 1.0 gm of diphenylamine in 100 gm of concentrated sulfuric acid shall be run down the side of the tube, so that there will be two distinct layers. If an appreciable amount of chlorate ion is present, a distinct blue ring will be visible at the border of the two layers. On shaking the tube, the ring disappears, but the contents assume a blue coloration, which lasts several seconds, depending on the amount of chlorate ion present. If only a trace of chlorate ion is present the blue ring may not form, but upon shaking the test tube, a slight bluish coloration will appear momentarily throughout the solution, lasting only a fraction of a second. If a definite blue ring forms, the washing shall be repeated as before using one 1.0 ml portion of Solution No.1, and finally a 0.5 ml portion of the same solution, as needed, depending on the outcome of the tests for the chlorate ion. (Usually a total of 14.0 or 14.5 ml of Solution No. 1 is sufficient). After complete removal of potassium chlorate the inside of the crucible shall be washed with 1.0 ml of Solution No. 2 and aspirated immediately. The bottom of the crucible shall be wiped dry with tissue paper and dried in an oven at 80° ± 1°C for 30 minutes, cooled in a desiccator and weighed. The percentage of potassium chlorate shall be calculated as follows to determine compliance with the requirement specified on the drawing:

$$\text{Potassium chlorate, percent} = \frac{B-(WM)\ 100}{W\ (1-M)}$$

where:

B = loss in weight of the contents of the crucible.
W = weight of the sample.
M = percent moisture expressed as a decimal fraction.

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:51Z
Check the source to verify that this is the current version before use.

4.6.2.2 Antimony sulfide.

4.6.2.2.1 Preparation of solution of ferric ammonium sulfate.-To approximately 120 ml of distilled water in a one-half liter reagent bottle, 125 gm of ferric ammonium sulfate shall be added. The bottle shall be stoppered and shaken vigorously for several minutes and then allowed to stand overnight. Portions of the saturated solution shall be filtered before using.

4.6.2.2.2 Procedure.-A portion of approximately 1 gm of the sample shall be accurately weighed directly into a tared 30 ml sintered glass crucible of medium porosity. Five ml of 1 percent nitric acid shall be added and the crucible constantly swirled for 1 minute in order to dissolve all the ingredients of the primer mixture except antimony sulfide. Care shall be taken not to spill any liquid. The mixture shall be filtered by applying suction employing a vacuum flask. The crucible shall be removed from the adapter and the bottom wiped dry with tissue paper. The operations of washing, using 5.0 ml of 1 percent nitric acid each time and swirling for exactly 1 minute shall be repeated. After a total of 40 ml of 1 percent nitric acid has been used, the crucible shall be removed and the bottom of it washed with water. The funnel, the funnel adapter and the vacuum flask shall be washed with water; the filtrate and washings shall be discarded. About 1 ml of a saturated solution of ferric ammonium sulfate shall be placed in the flask. The contents of the crucible shall be treated as before with 5.0 ml of 1 percent nitric acid and filtered by means of suction into the flask. If the liquid in the flask turns red, due to the presence of the sulfocyanate ion in the filtrate, the washing of the contents in the crucible shall be repeated with additional 5.0 ml portions of 1 percent nitric acid until a negative test for the sulfocyanate ion is affected. (Usually a total of 50. ml is sufficient). The crucible and contents shall be rinsed with alcohol and then with ether, and then aspirated until the odor of ether is no longer detectable. The crucible and contents shall be dried in an oven at 80° ± 1°C for 30 minutes, cooled in a desiccator and weighed. The percentage of antimony sulfide shall be calculated as follows to determine compliance with the requirement specified on the drawing:

$$\text{Antimony sulfide, percent} = \frac{A \times 100}{B}$$

where:

A = weight of residue in the crucible.
B = weight of sample on a moisture-free basis.

4.6.2.3 Lead azide.-The lead azide content shall be determined using the apparatus shown assembled on figure 2 and the temperature maintained at as near constant as is practicable. This shall be accomplished by protecting the gas system from the effects of air currents or bodies at appreciably different temperatures. A weighed portion of approximately 2 grams of the sample shall be transferred to a 125 ml Erlenmeyer flask (D), and 5 ml of 10-percent silver-nitrate solution and 10 ml of distilled water shall be added. This mixture shall be shaken and the sides of the flask washed down with distilled water. The delivery tube (A) shall be filled with 60 percent ceric ammonium nitrate solution. The Erlenmeyer flask (D) shall be connected tightly to the gas burette (E) (a gas burette calibrated in 0.1 ml and having a total capacity of 100 ml for the calibrated portion is satisfactory) by means of a tightly fitting rubber stopper (C), and this assembly clamped in position. The stopcock (F) shall be opened and, using the leveling

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:51Z
Check the source to verify that this is the current version before use.

bulb (G), the water level in the gas burette (E) shall be adjusted to the zero point. The stopcock (F) shall be closed and the system shall be tested for gas-tightness by raising and lowering the leveling bulb (G) and releveling the water in the bulb (G) with that in the burette (E). The system shall be considered to be gas-tight if the water level in the burette (E) returns to the zero point. Five ml of 60 percent ceric ammonium nitrate solution shall be added from the delivery burette (A), the leveling bulb (G) shall be lowered to the vicinity of 30 ml mark on the gas burette (E) and the reaction flask (D) shaken very vigorously, until no further increase in gas volume occurs. (This may conveniently be accomplished by agitation of the entire assembly). Approximately 200 ml of water shall be transferred to a 400 ml beaker (H) at the temperature of the gas burette as shown by thermometer (I), and the beaker raised under the reaction flask (D) until the water level rises about 2 inches above the bottom of the flask. The beaker shall be clamped in position and the apparatus allowed to stand with occasional shaking until the temperature of the gas in reaction flask (D), as indicated by thermometer (B) is the same as that of the gas in the gas burette (E), as indicated by thermometer (I), and until no further change in gas volume occurs. The height of the leveling bulb (G) shall be adjusted so that the level of the water in it is the same as the level of the water in the gas burette (E). The observed volume in the gas burette (E), the temperature of the gas, and the atmospheric pressure shall be recorded. The percentage of lead azide in the sample shall be calculated on a moisture-free basis as follows to determine compliance with the requirement specified on the drawing:

$$\text{Lead azide, percent} = \frac{(A-5.0)\ (B-C)\ 0.0570 \times 1.08}{W\ (100-D)\ (1 + 0.00367t}$$

where:

A = gas burette reading, ml.

B = atmospheric pressure, mm of mercury.

(Note.-If the pressure is observed on a mercurial barometer having a brass scale, the correct atmospheric pressure shall be calculated as follows:

Atmospheric pressure (B), mm = E-0.000163EF

where:

E = readings in mm of mercurial barometer.

F = temperature of barometer in °C).

C = vapor pressure of water at t °C.

D = percentage of moisture in the sample.

t = temperature of gas burette and reaction flask, °C.

W = weight of sample, grams.

4.6.2.4 Lead sulfocyanate.-The percentage of lead sulfocyanate in the sample shall be calculated on a moisture-free basis by subtracting from 100 the sum of the percentages of potassium chlorate, antimony sulfide and lead azide to determine compliance with the requirement specified on the drawing.

4.7 Functioning test (see 6.4.)

4.7.1 Sensitivity.-A sample consisting of groups of primer assemblies, each group in proportion to the number of assemblies from the corresponding production unit actually present in the lot shall be selected from each production unit shift. Each primer assembly shall be assembled as shown on figure 3 and tested in Fixture, Testing Detonator Sensitivity, Drawing 81-3-150. Observation shall be made for functioning and perforation of the aluminum disc to determine compliance with 3.6.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

4.7.2 Waterproofness.-Sample primer assemblies from each lot shall be immersed in water to a depth of not less than 2 inches, after bringing both the primer and the water to the same temperature. The sample primer assemblies shall be allowed to stand for a period of not less than 48 hours. Within one hour after removal from the water, the primers shall be tested according to the testing procedure for normal functioning (see 4.7.1) to determine compliance with 3.6.2.

4.8 Check test for possible deterioration.-This test shall be performed on samples at the plant assembling the primers into the ammunition component with which it is used. (See 3.7). Such tests shall be conducted at Government expense, without cost to the contractor loading the primer or the contractor assembling the primer into the item with which it is issued, and shall not constitute a basis of rejection against either contractor except where deterioration has occurred as a direct result of carelessness in handling, storage, etc., permitted by either contractor while the lot is under such contractor's jurisdiction. (Note-When these tests are required, the primer net lot size will be reduced by the number of assemblies expended in the applicable test procedure). Should any lot of primers fail the retest permitted in this phase, it shall be rejected. For the purposes of this test, the specified minimum number of samples shall be selected from each lot by the inspector and tested in accordance with 4.7.1 using the information contained in this paragraph as a basis of acceptability.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, labeling, and marking.-Packaging, packing, labeling, and marking shall be as specified on the applicable drawing.

5.2 Data card.-Data card information shall be as specified in Specification MIL-C-2550.

6. NOTES

6.1 Ordering data.-Procurement document should specify the following:

a. Title, number, and date of this specification

b. Primer assembly required (See 1.1)

6.2 Commercial steel balls can be purchased which will comply with the requirement for the drop weights used in the sensitivity and functioning tests.

6.3 "Teflon" a product of E. I. DuPont DeNeumours and Company, Wilmington, Delaware, has been found satisfactory for polytetrafluoroethylene.


6.4 Primer assemblies which fail to function in tests required by this specification should be sectioned and examined, wherever practicable, to determine if there are abnormal conditions present which might lead to malfunctioning. This examination is for information only, and will not affect acceptability.

NOTICE.-This specification, together with specifications and drawings pertaining to it and bearing a "Notice" of similar restrictions, is intended for use only in connection with procurement by the United States Government; and shall not be reproduced either wholly or in part except when authorized in connection with Government procurement, nor be used for any other purpose except when specifically authorized by the Chief of Ordnance.

Custodian:

Army-Ordnance Corps


Source: https://assist.dla.mil -- Downloaded: 202610-18T02:51Z
Check the source to verify that this is the current version before use.

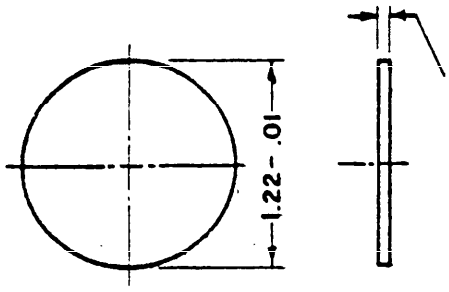

.012 ± .001 (APPLICABLE TO THE M26 AND M45 PRIMERS)
.040 ± .002 (APPLICABLE TO THE M41A1 PRIMER)
.032 ± .002 (APPLICABLE TO THE M55 AND M56 PRIMERS)


DISC, ALUMINUM

ALUMINUM ALLOY 2S, TEMPER H18 OR H28, SPEC QQ-A-561
(APPLICABLE TO THE M41A1 PRIMER)
ALUMINUM ALLOY 2S, TEMPER O, SPEC QQ-A-561
(APPLICABLE TO THE M26, M45, M55 AND M56 PRIMERS)

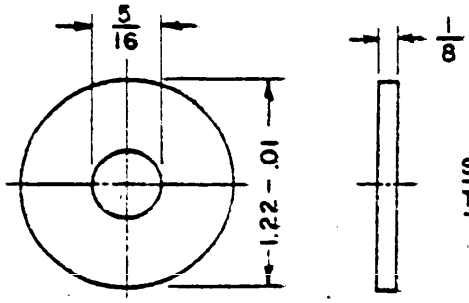


DISC, STEEL

STEEL, COLD ROLLED, STRIP, WD 1010-1025, TEMPER NO. 1, FINISH NO. 1, SPEC 57-136



SLEEVE, PLASTIC

PLASTIC, ETHYL CELLULOSE, SPEC MIL-P-14066
TYPE I, GRADE 4

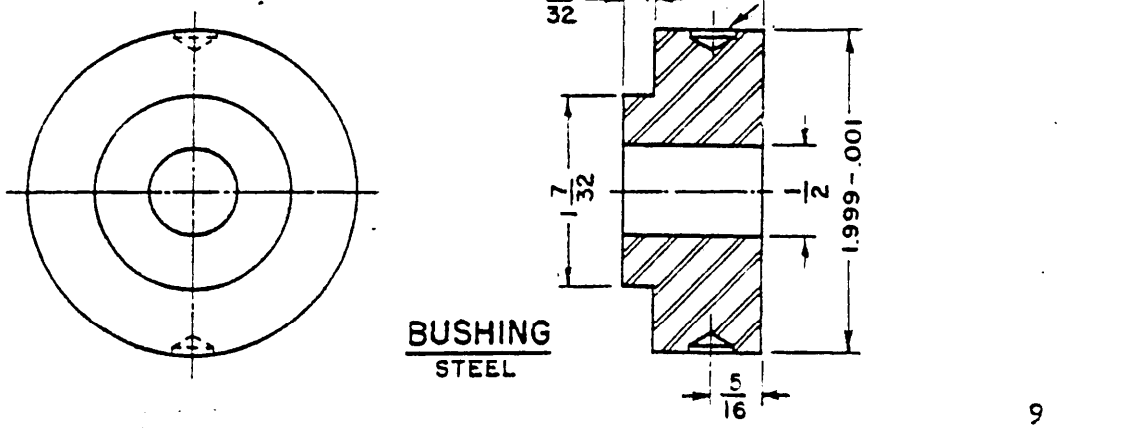

BUSHING
STEEL

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

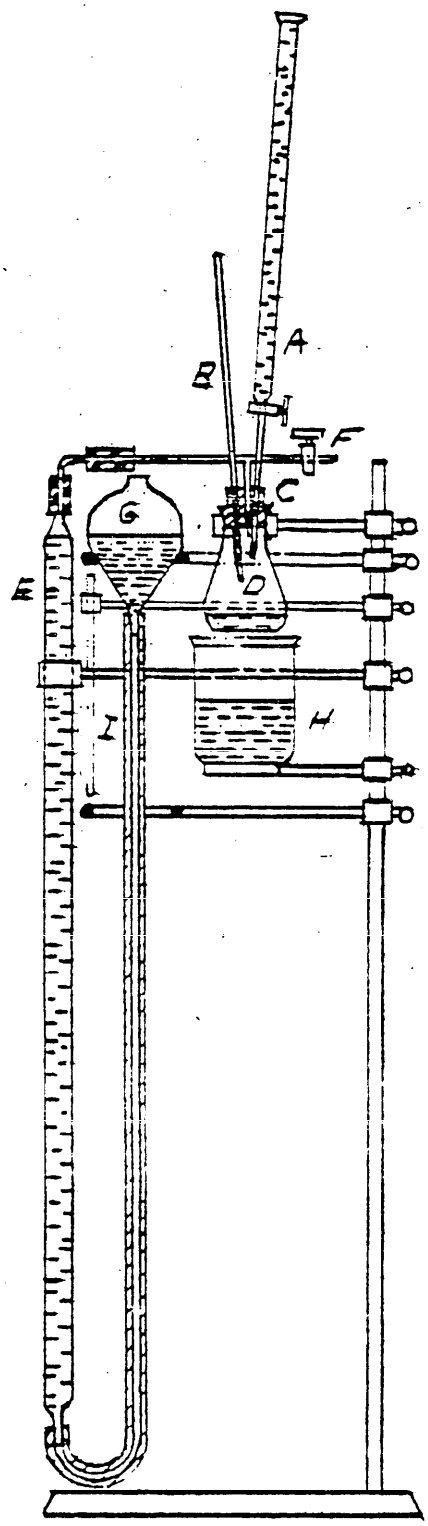


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.


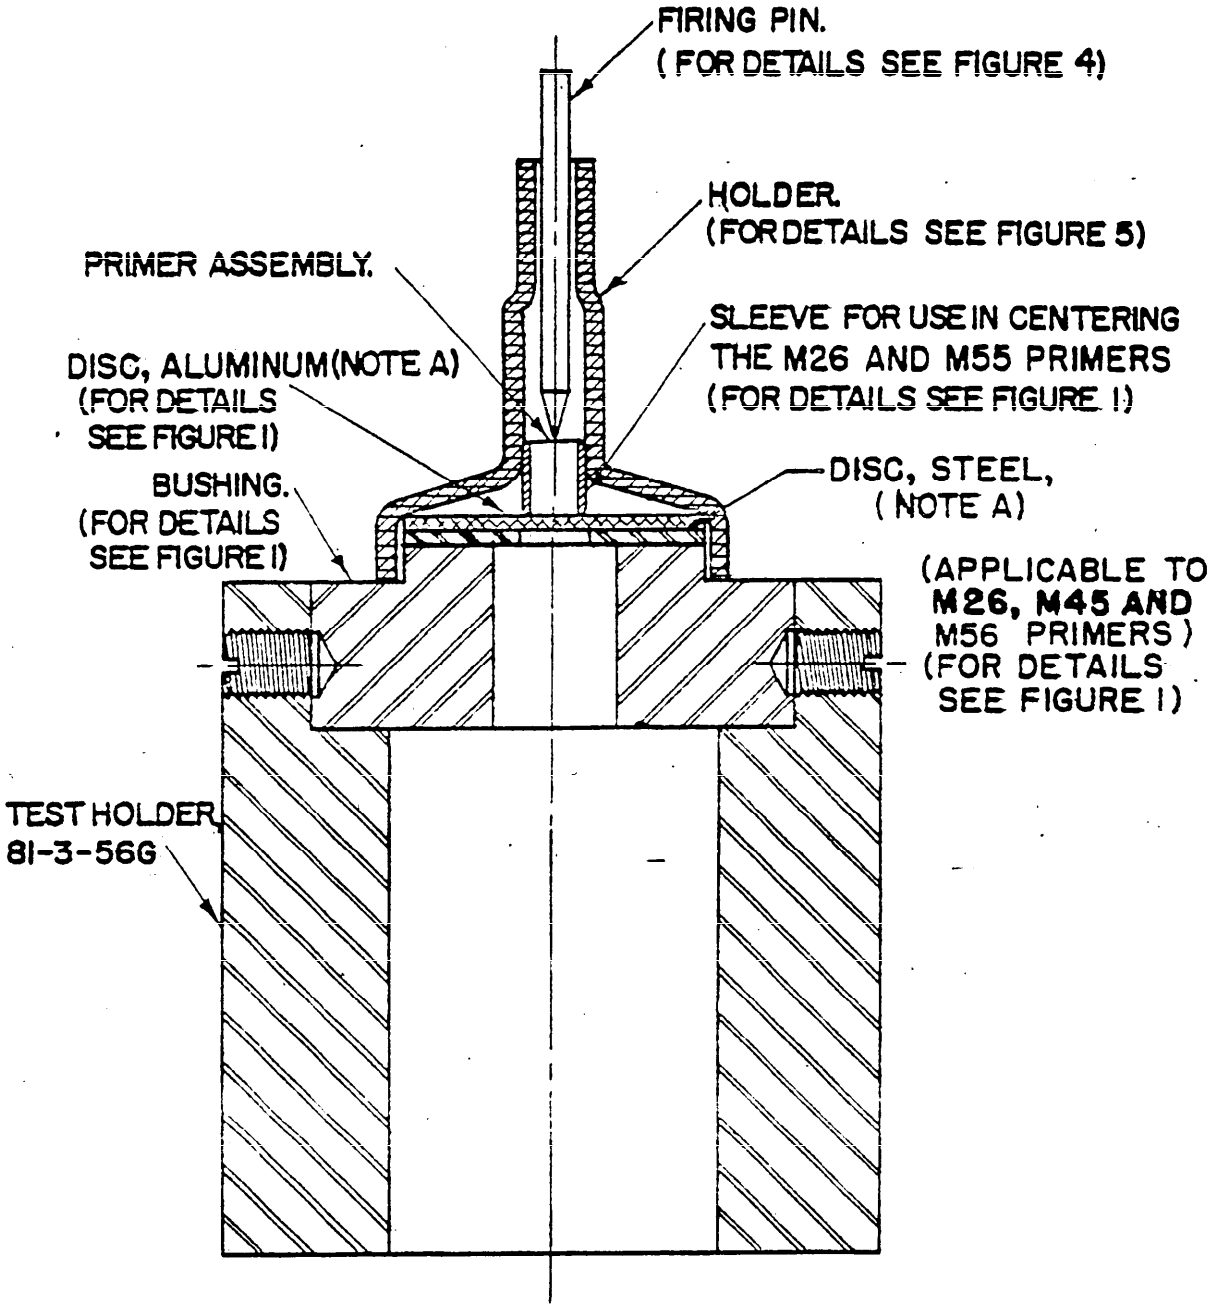


FIGURE 3

NOTES :-

A - WHEN TESTING THE M56 PRIMER, PLACE STEEL DISC ON TOP OF ALUMINUM DISC.


Source: https://assist.dla.mil -- Downloaded: 202610-18T02:51Z
Check the source to verify that this is the current version before use.

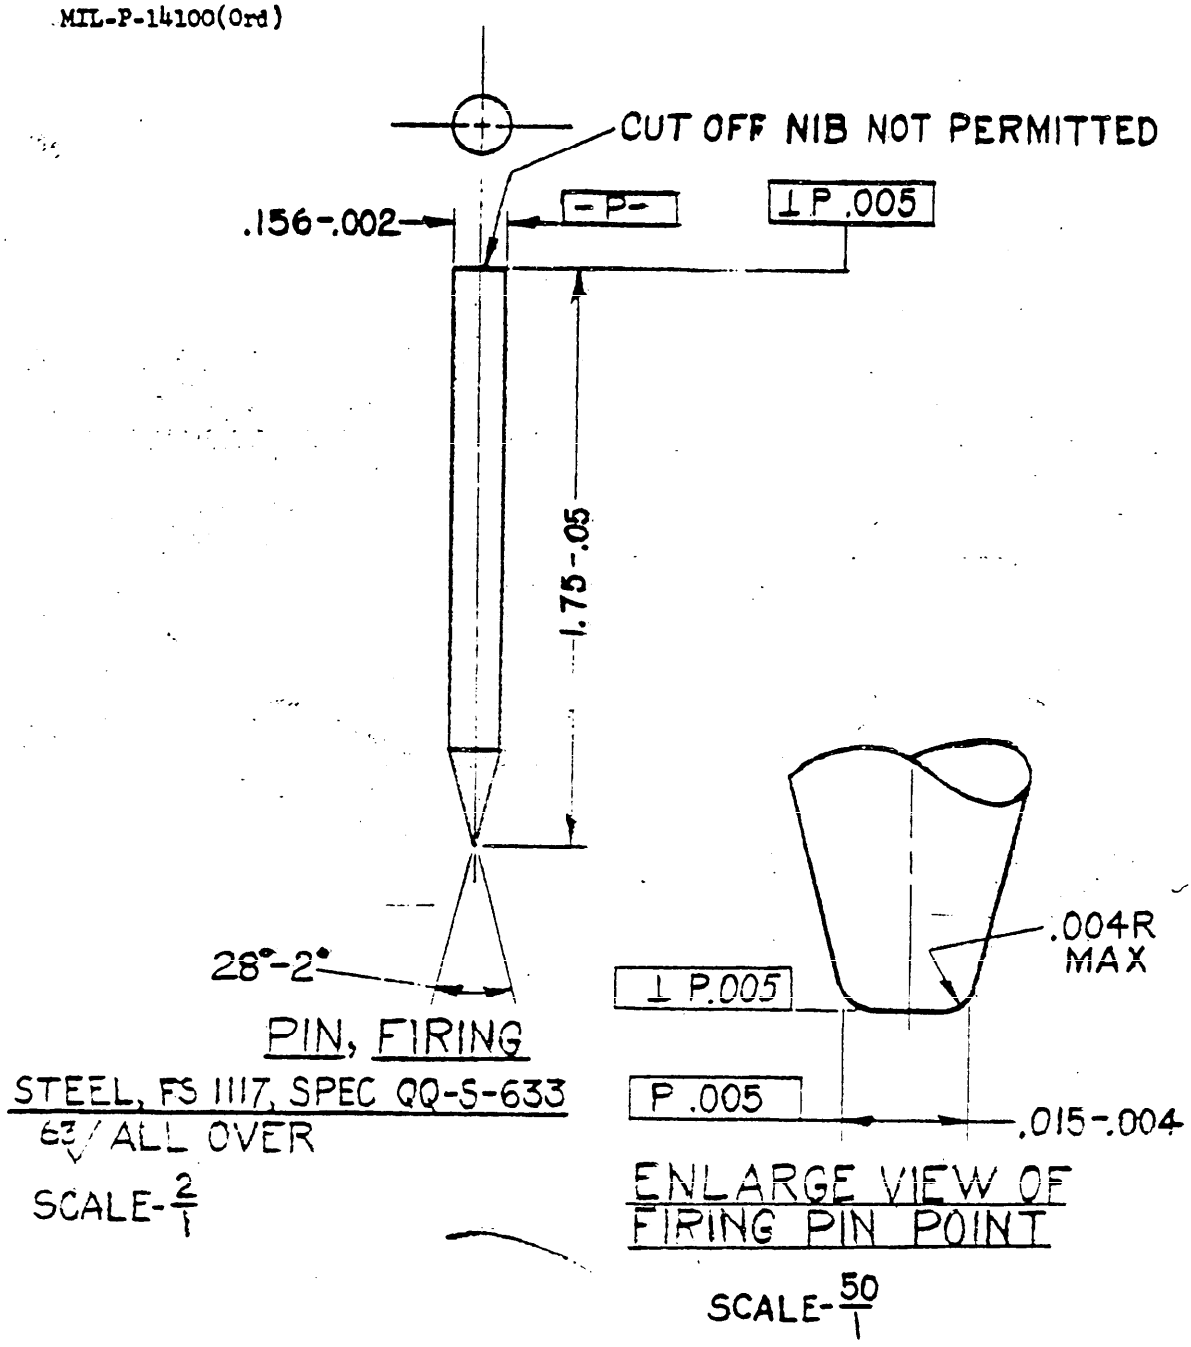

FOR FINISHES SEE MIL STD-10 & URAX-6
FOR STD DIMENSIONING & TOLERANCING SEE STD 30-1-7.

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:51Z
Check the source to verify that this is the current version before use.

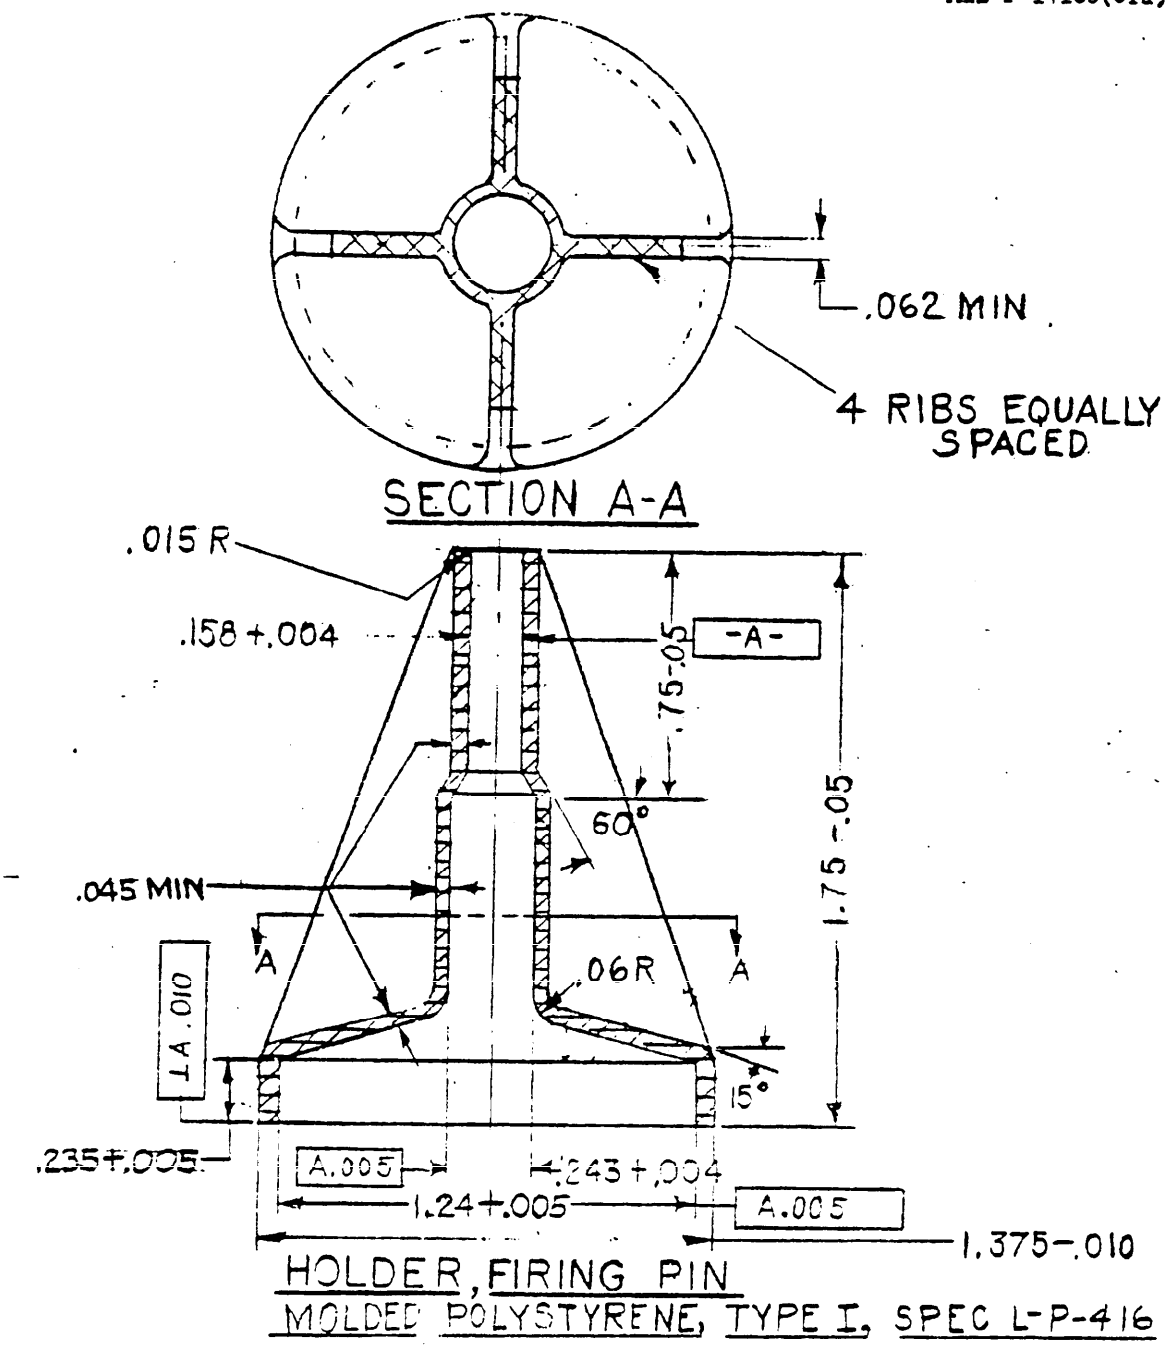

HOLDER, FIRING PIN
MOLDED POLYSTYRENE, TYPE I, SPEC L-P-416

NOTES:-
FLASH MARKS AND DRAFT ALLOWABLE ONLY ON EXTERNAL SURFACE.
SPEC MIL-G-2550 GENERAL SPECIFICATIONS FOR AMMUNITION EXCEPT SMALL ARMS AMMUNITION, APPLIES.
FOR STD DIMENSIONING AND TOLERANCING SEE STD 30-1-7.

FIGURE 5

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:51Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Picatinny Arsenal
Attn SMUPA-DC7
Dover New Jersey

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FC CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:51Z
Check the source to verify that this is the current version before use.