
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5809

Form approved
OMB No. 0704-0188

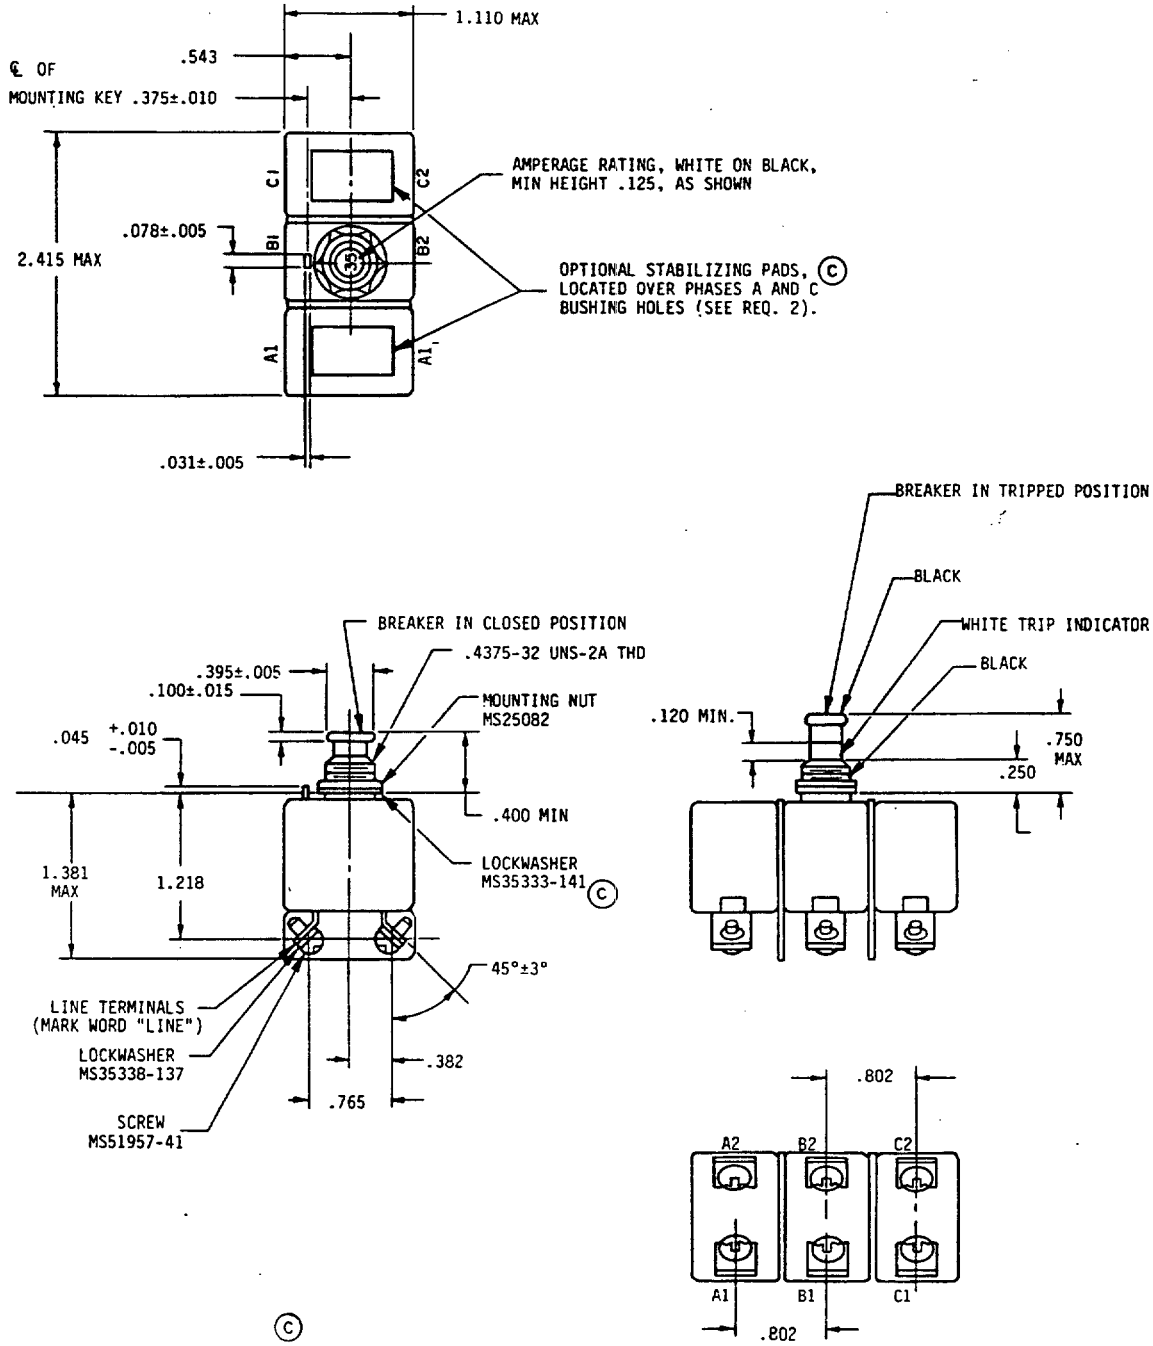

© DENOTES CHANGES

FIGURE 1. TRIP-FREE CIRCUIT BREAKER

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-ER NAVY- AIR FORCE-65 DLA- REVIEW: USER: PROJECT NUMBER: 5925-0201	MILITARY SPECIFICATION SHEET TITLE CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL 3 PHASE, 1 THRU 35 AMP, TYPE 1	SPECIFICATION SHEET NUMBER MS14153C 9 JAN 90 SUPERSEDING MS14153B 30NOV.67 AMSC- N/A FSC 5925
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 1 of 2

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

GARDEN STATE REPROGRAPHICS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5809

Form approved
OMB No. 0704-0188

(C) TABLE I. ELECTRICAL AND MECHANICAL CHARACTERISTICS.

DASH NO.	NOMINAL AMPERE RATING	VOLT DROP MAX.	WEIGHT MAX. LBS.	OPERATING FORCE MAX. LBS.		ENDURANCE CYCLES				MECH. NO LOAD
						RESISTIVE		INDUCTIVE		
				PULLOUT	RESET	AC	DC	AC	DC	
1	1	1.10	.25	12	12	5000 1/	NONE	2500 1/	NONE	5000
15	15									
20	20									
25	25	.200								
30	30									
35	35									

1/ 400 Hz 115/200 VOLT SYSTEM. TESTED AT 120±5 VOLTS 380-400Hz.

(C) TABLE II. DETAIL CALIBRATION REQUIREMENTS.

NOMINAL AMPERE RATING	+25° C % OF RATED CURRENT					-55° C % OF RATED CURRENT					+71° C % OF RATED CURRENT				
	110	145	200	500	1000	110	165	200	500	1000	100	145	200	500	1000
1	MUST HOLD 1 HOUR MIN. 3/	MUST TRIP 1 HOUR MAX. 3/	4 TO 20 4/	0.4 TO 2.0 4/	0.10 TO 0.53 4/	MUST HOLD 1 HOUR MIN. 3/	MUST TRIP 1 HOUR MAX 3/	6 TO 40 4/	0.55 TO 3.5 4/	0.15 TO 60 4/	MUST HOLD 1 HOUR MIN. 3/	MUST TRIP 1 HOUR MAX. 3/	3 TO 20 4/	0.33 TO 1.7 4/	0.06 TO 0.40 4/
15															
20															
25															
30															
35															

2/ ONE PHASE AT SPECIFIED LOAD AND OTHER PHASES CARRYING RATED LOAD.

3/ BALANCED THREE PHASE LOAD.

4/ SINGLE PHASE LOAD ONLY, TRIP TIME IN SECONDS.

(C) TABLE III. INTERRUPTING CAPACITY REQUIREMENTS-AMPERES.

NOMINAL AMPERE RATING	TEST DESIGNATION PER MIL-C-5809											
	A		B		C	D	E	F	G		H	
	1Ø	3Ø	1Ø	3Ø					1Ø	3Ø	1Ø	3Ø
1	(*)	(*)	(*)	(*)	(*)	(*)	(*)	(*)	2000	1200	2000	1200
15												
20												
25												
30												
35												

(*) NOT APPLICABLE

TABLE IV. ENVIRONMENTAL PERFORMANCE.

MAXIMUM OPERATING ALTITUDE - FT.	70,000
OPERATING AMBIENT TEMPERATURE RANGE	-55°C TO +71°C
VIBRATION - IN ACCORDANCE WITH MIL-C-5809	SINE - REQUIRED
SHOCK	50 G, MIL-STD-202, METHOD 213, TEST G

(C) REQUIREMENTS:

1. THE PART NUMBERS FOR CIRCUIT BREAKERS IN ACCORDANCE WITH THIS SPECIFICATION SHALL CONFORM TO THE EXAMPLE BELOW.

MS14153 -25
- -25: AMPERAGE RATING
- MS14153: BASIC PART NUMBER

WHEN A DESIGNATOR IS NOT APPLICABLE IT SHALL BE OMITTED FROM THE PART NUMBER.

2. OPTIONAL STABILIZING PADS: IF INCLUDED, VIBRATION STABILIZING PADS SHALL BE CHR SILICON RUBBER 9235, LOCATED OVER THE PHASE A AND C PLUGGED BUSHING HOLES, AND ATTACHED WITH A SILICON ADHESIVE.

NOTES:

1. SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH ANSI B46.1.
2. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.031.
3. VOLTAGE RATING: 115V 400Hz NOMINAL L-W OR 200V 400Hz NOMINAL L-L.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY- ER NAVY-
AIR FORCE- 85 DLA-
REVIEW:
USER:
PROJECT NUMBER: 5925-0201

MILITARY SPECIFICATION SHEET

TITLE CIRCUIT BREAKER-AIRCRAFT, TRIP-FREE, PUSH-PULL 3 PHASE, 1 THRU 35 AMP, TYPE 1

SPECIFICATION SHEET NUMBER
MS14153C 9 JAN 90

SUPERSEDING
MS14153B 30 NOV 1987

AMSC- N/A FSC 5925

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.