
This standard has been approved by the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

DD FORM 672-1 (Limited coordination)

PROCUREMENT SPECIFICATION	P.A. Other Cost (D) 15
MIL-C-27599 (USAF)	
SUPERSEDES:	TITLE: CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNT, SOLDER TYPE, BAYONET COUPLING
SHEET 1 OF 2	MILITARY STANDARD MS20026

EDITION OF 1 SEP 61 MAY BE USED.

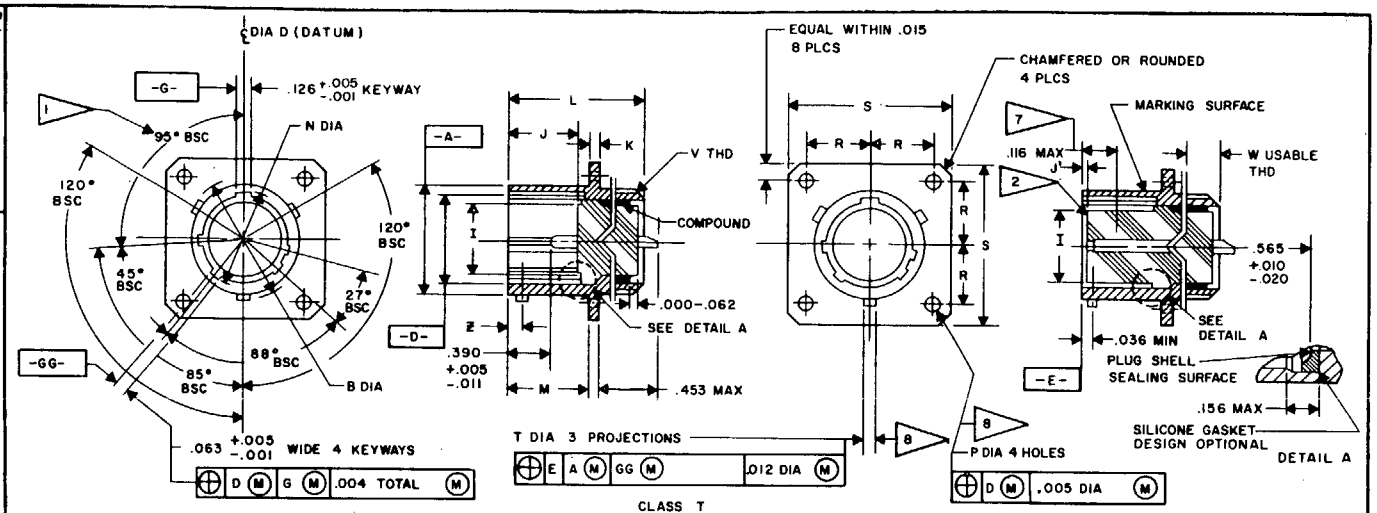

CLASS T

SHELL SIZE	A DIA +.001 -.005	B DIA +.000 -.016	D DIA +.005 -.001	I DIA ±.005		J ±.005 PIN INSERT	J' ±.005 SOCKET INSERT	K +.015 -.000	L MAX	M +.000 -.005	N DIA +.005 -.006	P DIA +.010 -.005	R BSC	S ±.020	T DIA +.006 -.002	W MIN FULL THD	Z BSC	V THD CLASS 2A PLATED UNEF	FOR INSERT ARR. SEE DWG. MS	CC
9	.572	.662	.442	.298		.576	.020	.085	1.094	.632	.492	.128	.3595	.936	.078	.250	.100	7/16-28	20049	.010
11	.700	.810	.570	.413							.620		.406	1.031				9/16-24	20050	
13	.850	.960	.687	.527							.769		.453	1.125				11/16-24	20051	
15	.975	1.085	.812	.652							.894		.4845	1.219				13/16-20	20052	
17	1.100	1.210	.937	.777							1.019		.531	1.312				15/16-20	20053	
19	1.207	1.317	1.042	.866							1.124		.578	1.438				1 1/16-18	20054	
21	1.332	1.442	1.167	.991				.115		.602	1.249	.147	.625	1.562				1 3/16-18	20055	
23	1.457	1.567	1.292	1.116							1.374		.6875	1.688				1 5/16-18	20056	
25	1.582	1.692	1.417	1.241							1.499		.750	1.812	.125		.109	1 7/16-18	20057	

(D) FOR CHANGES SEE SHEETS 1 & 2

EXAMPLE OF PART NUMBER: (D)

MS 20026 T 15 A 18 P A

MS NO. | CLASS | SHELL SIZE | FINISH (COLOR) | INSERT ARRANGEMENT NUMBER | STYLE (P OR S) | POLARIZATION NO LETTER REQUIRED FOR NORMAL

FED. SUP CLASS 5935

APPROVED 22 JAN 65 REVISED (A) 11 JAN 66 (B) 9 AUG 66 (C) ENTIRE STD REDRAWN 1 FEB 67 (D) 20 DEC 67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

NOTES:

1. NORMAL KEYWAY POSITION. FOR OTHER KEYWAY POSITIONS SEE TABLE A, FIGURE 2 OF PROCUREMENT SPECIFICATION
2. INSERT FRONT SURFACE SHALL BE FLAT WITHIN .005 TOTAL INDICATOR READING.
3. DIAMETERS A AND D SHALL BE CONCENTRIC WITHIN .015 T.I.R.
4. DIAMETERS D AND I SHALL BE CONCENTRIC WITHIN .005 T.I.R. AT MMC.
5. DIAMETER A WITH RESPECT TO DIAMETER B, AND DIAMETER D WITH RESPECT TO DIAMETER N, SHALL BE CONCENTRIC AT MMC.
6. DIMENSIONS IN INCHES.
7. THE POINT AT WHICH A GAGE PIN, HAVING THE SAME BASIC DIAMETER AS THE MATING CONTACT AND A SQUARE FACE, TOUCHES SOCKET CONTACT SPRING.
8. THE GAGE FEATURES FOR GG SHALL BE CC SMALLER THAN THEIR MMC SIZE AT BASIC LOCATION.

APPROVED 1 FEB 67 REVISED (D) FOR CHANGES SEE SHTS 1 & 2.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. 15 Cthor Cost (D)	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNT SOLDER TYPE, BAYONET COUPLING.	MILITARY STANDARD MS 20026
PROCUREMENT SPECIFICATION MIL-C-27599 (USAF)	SUPERSEDES:	SHEET 2 OF 2

DD FORM 672-1 (Limited coordination) EDITION OF 11

This standard has been approved by the Department of the USAF and is mandatory for use by the USAF. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:21Z
Check the source to verify that this is the current version before use.