
FED. SUP CLASS
1670

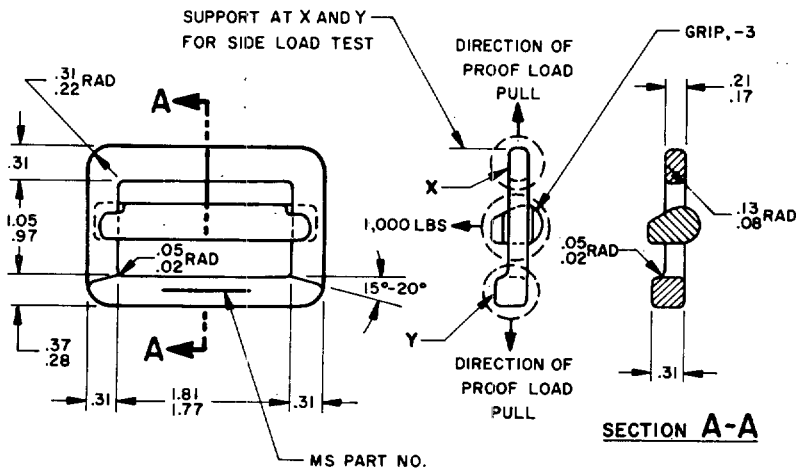

DASH NO.	DESCRIPTION
-1	ASSEMBLY WITH CADMIUM PLATING
-2	ASSEMBLY WITH PHOSPHATE COATING
-3	GRIP WITHOUT PLATING OR COATING

NOTES:

MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049.

METHOD OF FORMING: HOT FORGE.

SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL BE $\sqrt{125}$ MAX. IN ACCORDANCE WITH ANSI B46.1.

HEAT TREATMENT: 170,000 TO 190,000 LBS/SQ IN. TENSILE STRENGTH AFTER ASSEMBLY IN ACCORDANCE WITH MIL-H-6375.

ADAPTER SHALL BE SUBJECTED TO A 2500 POUND PROOF LOAD AND 1000 POUND SIDE LOAD AS INDICATED BY ARROWS. **ADAPTER TO BE SUPPORTED AT POINTS X AND Y FOR SIDE LOAD. PROOF LOAD SHALL BE EVENLY DISTRIBUTED ACCROSS ENDS OF ADAPTER.**

FINISH - AFTER ASSEMBLY:

-1 CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE I.
-2 PHOSPHATE COAT, MIL-P-16232, TYPE Z, CLASS 4B FOLLOWED BY MIL-W-3688.

ALL PERPENDICULAR SURFACES SHALL INTERSECT WITH A .04 - .11 RADIUS UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES: **EXCEPT AS OTHERWISE SPECIFIED HEREIN, TOLERANCES ±.03', ANGLES ± 3°.**

-3 GRIP IS USED ON SEVERAL OTHER HARDWARE ITEMS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED

APPROVED 12 MAY 61 REVISED (A) 16 SEPT 65 (B) 1 MAY 68 (C) 26 AUG 74

User activities:
ARMY - AV
NAVY - AS
USAF - 11, 82

review activities:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. USAF - 82 Other Cust Army - GL Navy - AS	TITLE ADAPTER, PARACHUTE HARNESS, QUICK FIT	MILITARY STANDARD MS22040	
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AN6517, AN6518, MS70103	SHEET 1	OF 2


DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
1670

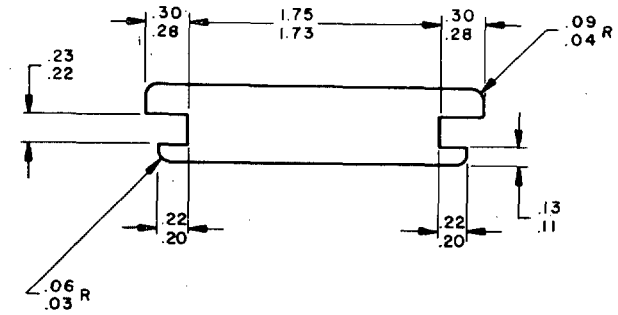

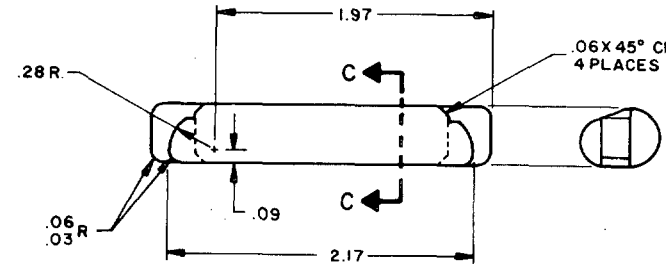



COARSE CROSS DIAMOND MACHINE KNURL OR EQUIVALENT (APPROX 14 PER INCH), DEPTH .015 TO .035; OPTIONAL TO RUN KNURLING FULL LENGTH OF GRIP

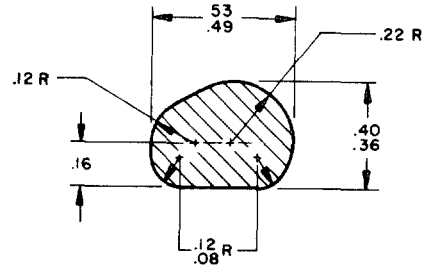

SECTION C-C
ENLARGED
GRIP - 3

(C) ENTIRE STANDARD REVISED

APPROVED 12 MAY 61 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2 (C) 26 AUG 74

User activities:

Review activities: ARMY - AV
USAF - 11, 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF - 82 Other Cust Army - GL Navy - AS	TITLE ADAPTER PARACHUTE HARNESS, QUICK FIT	MILITARY STANDARD MS 22040
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: AN6517, AN6518, MS20123	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—603-110/1772

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:44Z
Check the source to verify that this is the current version before use.