FED SUP CLASS
593?

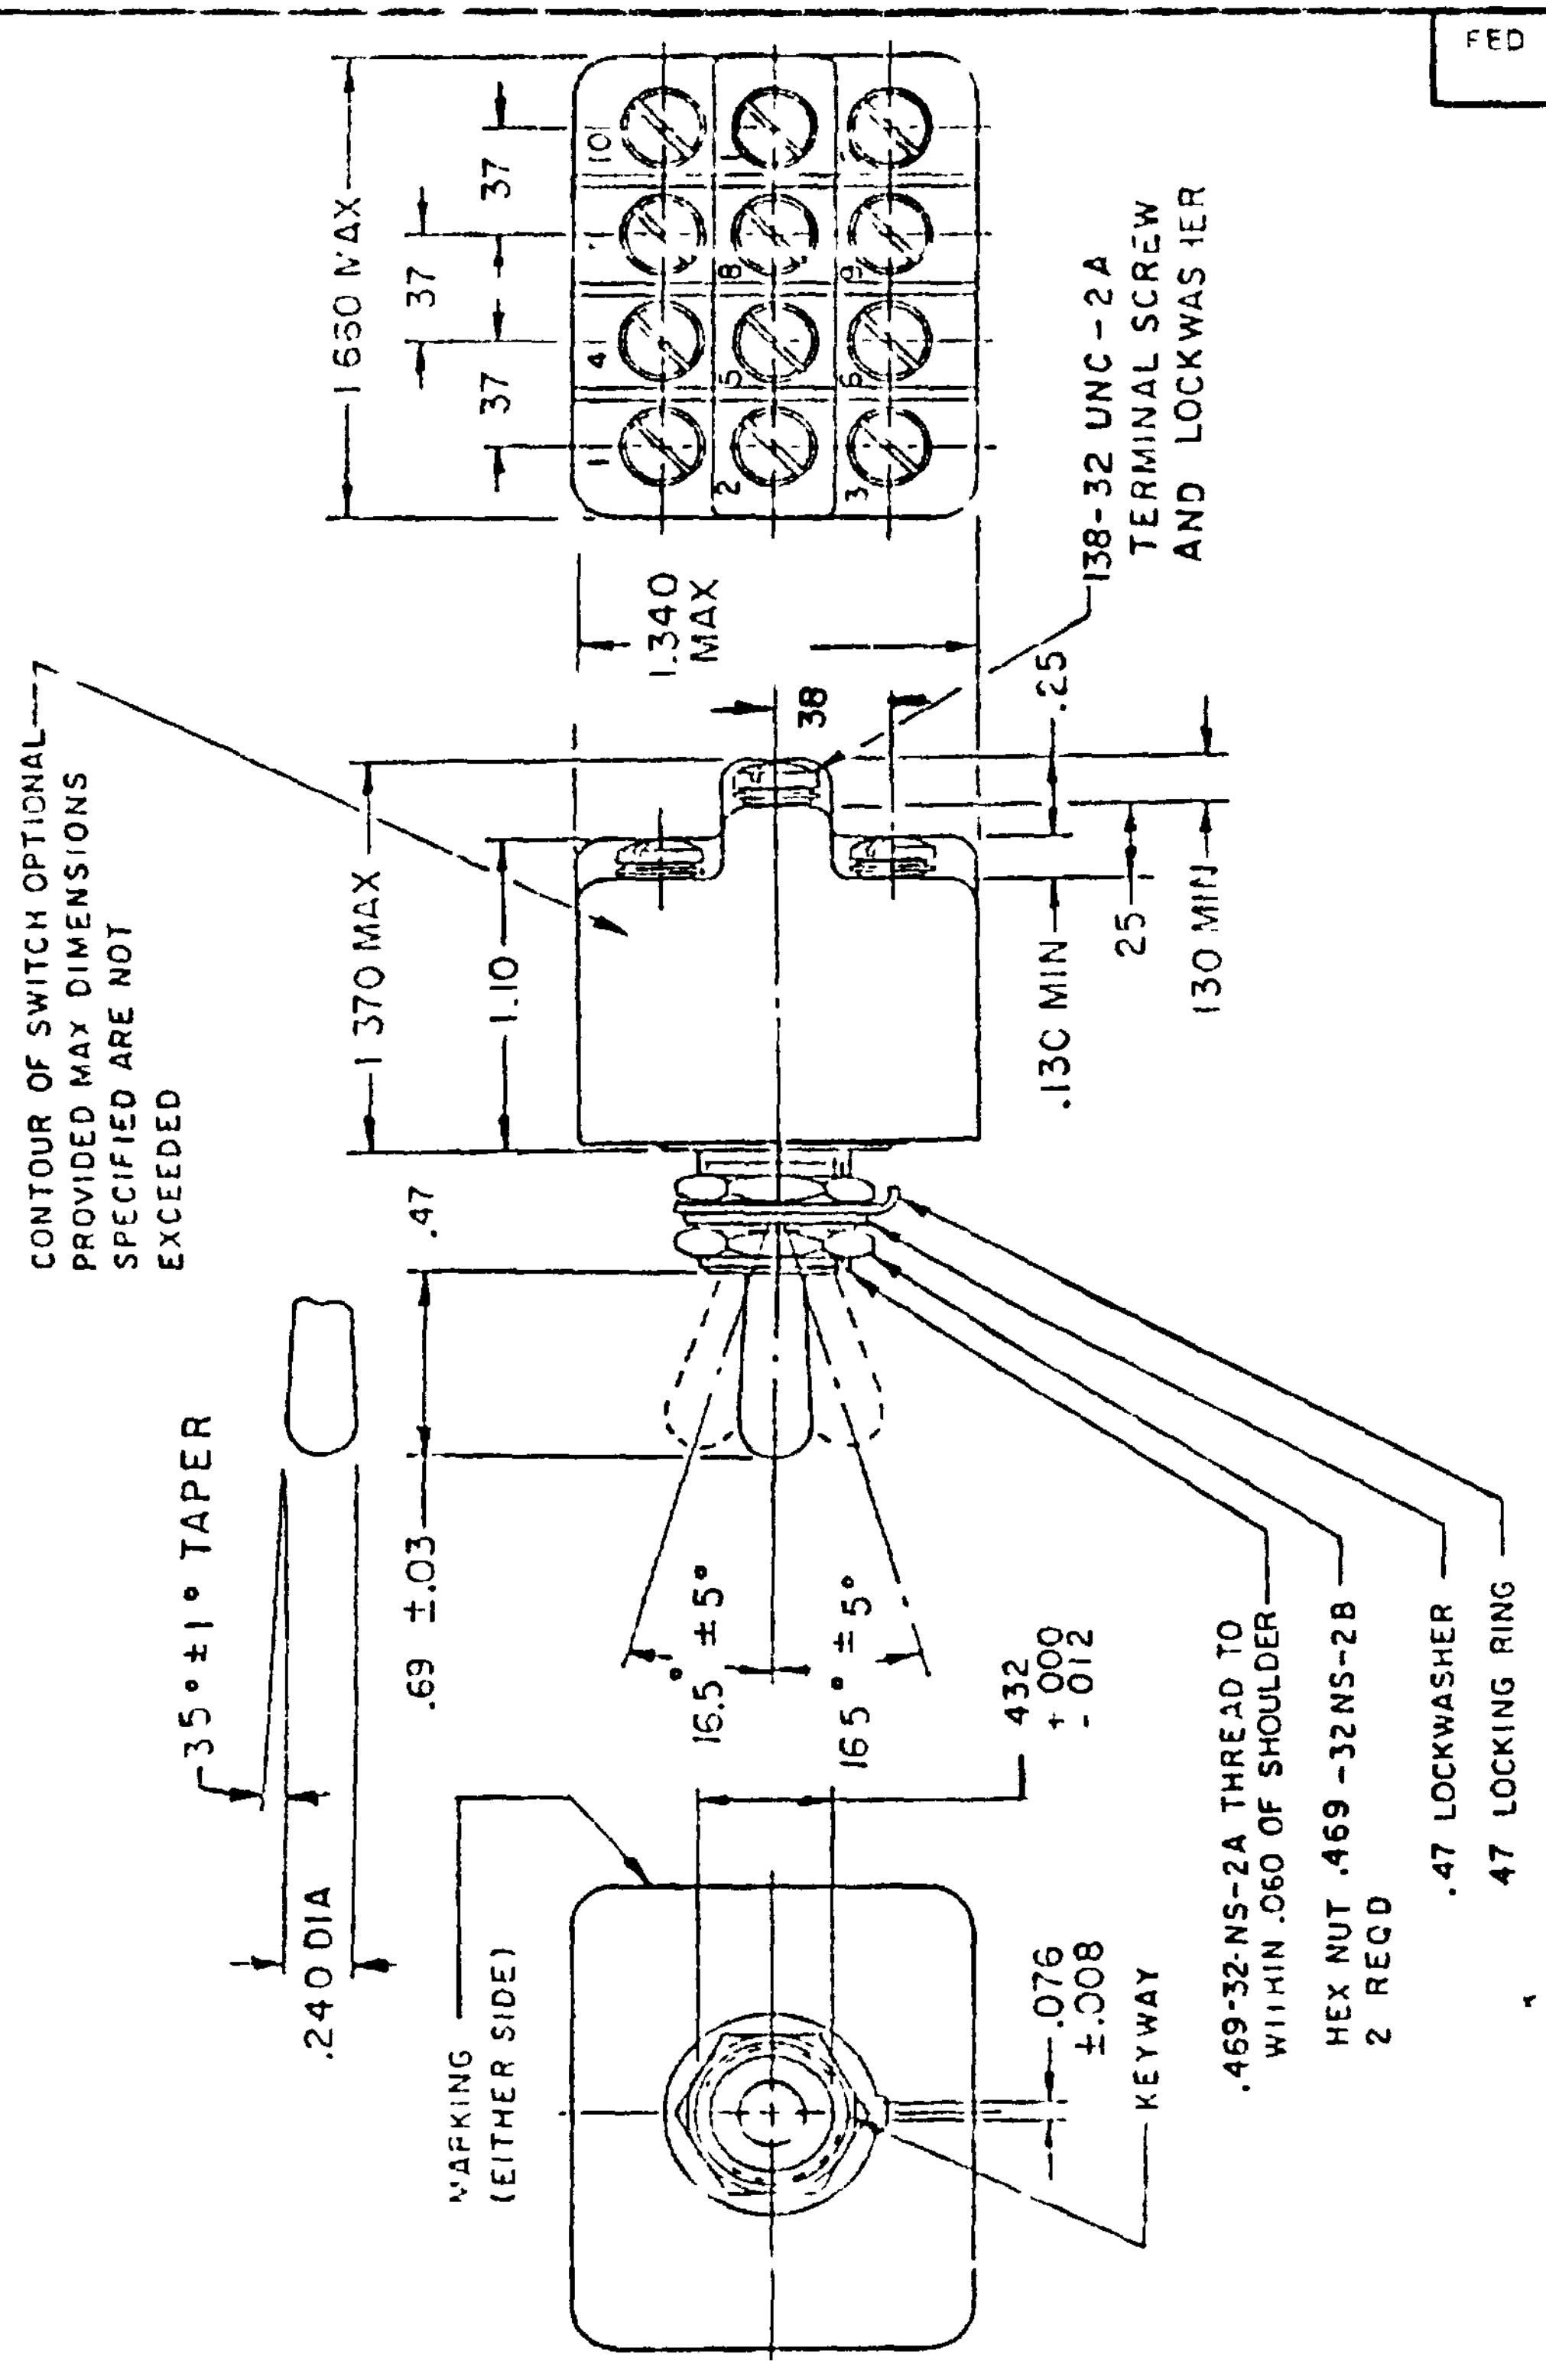

1.630 MAX
.37
.37
.37
10
7
4
1
8
5
2
9
6
3
1.340 MAX
.138-32 UNC-2A TERMINAL SCREW AND LOCKWASHER
.38
.25
.25
.130 MIN
.130 MIN
1.370 MAX
1.10
CONTOUR OF SWITCH OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED
.47
.69 ±.03
35° ±1° TAPER
.240 DIA
16.5° ±5°
16.5° ±5°
.432 +.000 -.012
.469-32-NS-2A THREAD TO WITHIN .060 OF SHOULDER
HEX NUT .469-32NS-2B 2 REQD
.47 LOCKWASHER
.47 LOCKING RING
MARKING (EITHER SIDE)
.076 ±.008 KEYWAY

Ⓙ Denotes changes

APPROVED 31 Jul 1958 REVISED Ⓓ 20 Apr 67 Ⓔ 16 Sep 69 Ⓕ 22 Apr 71 Ⓖ 17 May 77 Ⓗ 17 Mar 78 Ⓙ 28 Sep 87

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Custodians:
Army - AV
Navy - EC
Air Force - 99
DLA - ES

Review activities

User activity Air Force - 11

P A Air Force - 85 Other Cust Army ER Navy AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED	MILITARY STANDARD MS24525
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 1 OF 3

DD FORM 672 [illegible] PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

93? .35 -03

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

FSC CLASS
5930

Inches	mm	Inches	mm
.005	0.13	.25	6.4
.008	0.20	.37	9.4
.012	0.30	.38	9.7
.02	0.5	.432	10.97
.03	0.8	.469	11.91
.060	1.52	.47	11.9
.076	1.93	.69	17.5
.130	3.30	1.10	27.9
.138	3.51	1.340	34.04
.240	6.10	1.370	34.80
		1.660	42.16

NOTES
1 Dimensions are inches.
Ⓙ2 Metric equivalents are given for general information only.
3 Unless otherwise specified, tolerance is ± .020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals
4 For hardware and terminal screw detail specifications, see appendix of MIL-S-3950.
5. Thread length and hole depth should be such that screws will not bottom when tightened.
6. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever
7 Maximum weight is .20 pound
Ⓙ8 In event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence
Ⓙ9 Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and use shall be made from this document when applicable

Review activities: Army - AV
Navy - EC
Air Force - 99
DLA - FS

User activity Air Force - 11

APPROVED 31 Jul 195[illegible] REVISED Ⓙ For changes see page 2

[illegible]	International interest	TITLE [illegible] TOGGLE, [illegible] ENVIRONMENTALLY SEALED	MILITARY STANDARD MS24525
[illegible]		SUPERSEDES	P

DD FORM 672 [illegible]

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities
Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity
Air Force - 11

FED SUP CLASS
5930

Detail requirements

MS part number	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS24525-21	1-2 7-8 4-5 On 10-11	Off	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15
MS24525-22	Off	None	2-3 8-9 5-6 On 11-12						
MS24525-23	1-2 7-8 4-5 On 10-11	None	2-3 8-9 5-6 On 11-12						
MS24525-24	None	Off	2-3 8-9 5-6 On 11-12						
MS24525-25	None	Mom. off	2-3 8-9 5-6 On 11-12	4	18	10	2	11	8
MS24525-26	1-2 Mom. 7-8 4-5 on 10-11	None	2-3 8-9 5-6 On 11-12						
MS24525-27	1-2 Mom 7-8 4-5 on 10-11	Off	2-3 Mom. 8-9 5-6 on 11-12						
MS24525-28	1-2 Mom. 7-8 4-5 on 10-11	Off	None						
MS24525-29	Mom. off	None	2-3 8-9 5-6 On 11-12						
MS24525-30	1-2 Mom. 7-8 4-5 on 10-11	None	Off						
MS24525-31	1-2 Mom. 7-8 4-5 on 10-11	Off	2-3 8-9 5-6 On 11-12						
MS24525-32	None	1-2 7-8 4-5 On 10-11	2-3 Mom. 8-9 5-6 on 11-12						
MS24525-33	None	1-2 7-8 4-5 On 10-11	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15

APPROVED 31 Jul 1958 REVISED Ⓙ For changes see page 2

P A
Air Force - 85
Other Cust
Army - ER
Navy - AS

International interest

TITLE
SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED

MILITARY STANDARD

MS24525

Procurement Specification
MIL-S-3950

SUPERSEDES

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.