
FED. SUP CLASS
5935

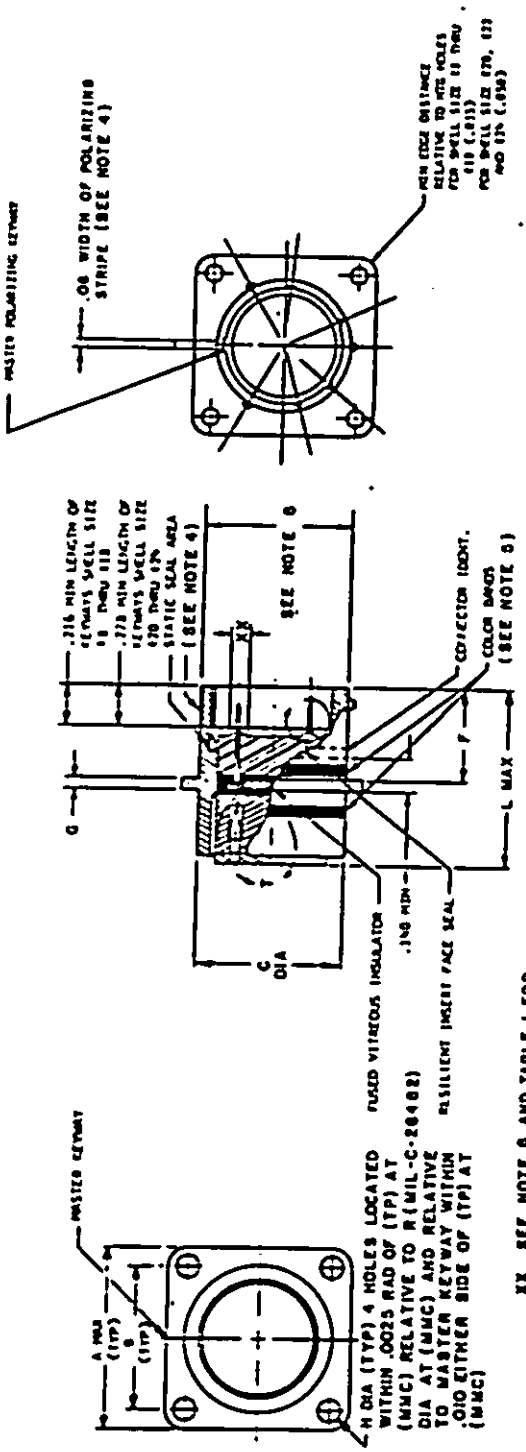

Ⓐ Entire standard revised

APPROVED 17 Jan 72 REVISED Ⓐ 5 SEPT 1975

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, BOX MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3477
Procurement Specification MIL-C-26482		SUPERSEDES: MS3477 (NAVY)	SHEET 1 OF 4
DD FORM 1 SEP 63 672	(Coordinated)		5935-1947-23


Source: https://assist.dla.mil/ -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935


User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17


ENGAGING END OF CONTACTS

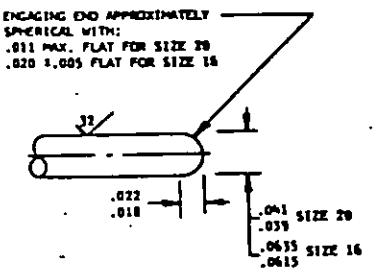



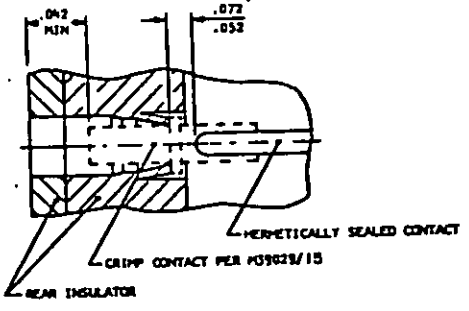

DETAIL T



MAX PANEL THICKNESS (TYP)

APPROVED 17 Jan 72 REVISED (A) Entire standard revised

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, BOX MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3477
Procurement Specification MIL-C-26482		SUPERSEDES: MS3477 (NAVY)	SHEET 2 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-1947-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

Shell size	A	B	C	F	G	H	L	Panel cutout Dia.	Weight (lbs) Max. Pin insert
8	.828	.594	.563 .557	.704 .680	.078 .046	.120	1.078	.570	(Weight will be supplied in later revision)
10	.954	.719	.673 .667	.704 .680	.078 .046	.120	1.078	.680	
12	1.047	.812	.782 .776	.704 .680	.078 .046	.120	1.078	.789	
14	1.141	.906	.907 .901	.704 .680	.078 .046	.120	1.078	.914	
16	1.234	.969	1.032 1.026	.704 .680	.078 .046	.120	1.078	1.039	
18	1.328	1.062	1.157 1.151	.704 .680	.078 .046	.120	1.078	1.164	
20	1.453	1.156	1.251 1.245	.756 .739	.110 .078	.120	1.140	1.258	
22	1.578	1.250	1.376 1.370	.756 .739	.110 .078	.120	1.140	1.383	
24	1.703	1.375	1.501 1.495	.756 .739	.110 .078	.147	1.140	1.508	

TABLE I. Reduced diameters (XX).

Shell size	Insert arrangements	Contact cavities
8	-33 & -98	A, B, C.
12	-10	C, G.
14	-12	A, B, C, D, E, F, G, H.
14	-18	A, C, E, G, J, L.
14	-19	B, D, F, H, K, M.
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R.
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T.
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y.

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

User activities: Army AV
Navy
Air Force

APPROVED 17 Jan 72 REVISED (A) Entire standard revised

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A Navy - AS
Other Cust
Army - EL
AF - 85

International interest

TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, BOX MOUNTING, BAYONET COUPLING, CLASS N

MILITARY STANDARD
MS 3477

Procurement Specification
MIL-C-26482

SUPERSEDES:
MS3477 (NAVY)

SHEET 3 OF 4

DD FORM 1 SEP 63 672 (Continued) Previous editions of this form are obsolete.

5935-1947-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935

User activities: Army AV
Navy
Air Force

Reviewer activities: Army MU, MI, EL
Navy EC, SH
Air Force 11, 17

REVISED (A) Entire standard revised

APPROVED 17 Jan 72

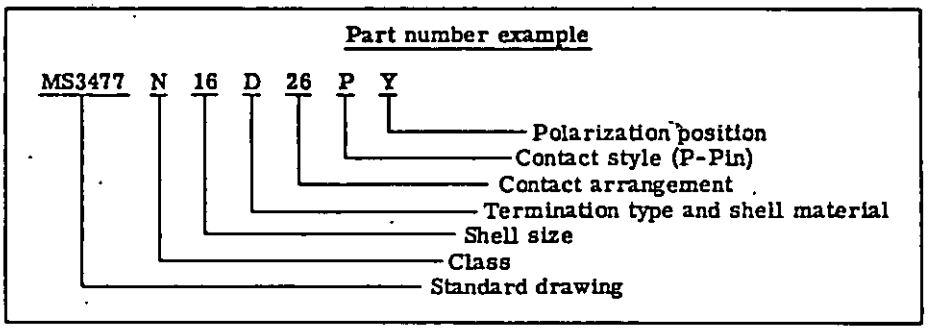

NOTES:
1. Dimensions are in inches.
2. Tolerances shall be .XX ±.01, .XXX ±.005, angular X° ±1° and X°X' ±30'.
3. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
4. Polarizing stripe, color optional.
5. Color band: .070 ±.031 wide, color blue. Band location must be such that it is visible when mounting.
6. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated. (See table I).
7. The complete requirements for procuring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
8. Intermateability dimensions shall be in accordance with MIL-C-26482.
9. Contact MIL-C-39029/22-XX-XX must be used for wire termination.
10. For insert arrangements see MIL-STD-1669.
11. Shell material: Cold rolled steel, per QQ-S-637.
12. Shell finish: .0001 minimum tin per MIL-T-10727, over nickel per QQ-N-290.
13. Insertion/removal tool MS3160-XX to be used with this connector.
14. Maximum wire diameter permissible: .074 for size 20 contact, .103 for size 16 contact.
15. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
16. Referenced documents shall be of the issue in effect on date of invitations for bids.

P.A. Navy - AS Other Cust Army - EL AF - 85	International interest	TITLE CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, HERMETIC, SOLDERLESS, BOX MOUNTING, BAYONET COUPLING, CLASS N	MILITARY STANDARD MS 3477
Procurement Specification MIL-C-26482		SUPERSEDES: MS3477 (NAVY)	SHEET 4 OF 4

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-1947-23

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.