
FED. SUP CLASS
5305

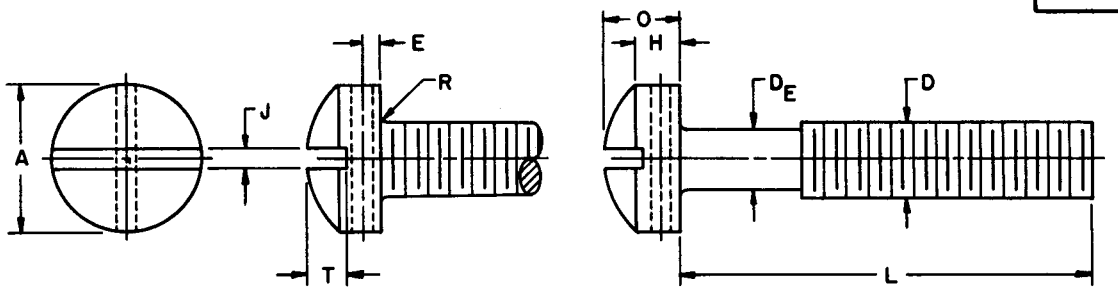

NOMINAL SIZE	D		2 (.086)	4 (.112)	6 (.138)	8 (.164)
THREADS PER INCH			64NF	48NF	40NF	36NF
BODY DIAMETER	D_e	Max	.0860	.1120	.1380	.1640
		Min	.0733	.0954	.1184	.1424
HEAD DIAMETER	A	Max	.140	.183	.226	.270
		Min	.124	.166	.208	.250
HEAD HEIGHT	H	Max	.062	.079	.096	.113
		Min	.055	.072	.089	.106
TOTAL HEAD HEIGHT	O	Max	.083	.107	.132	.156
		Min	.070	.094	.118	.141
SLOT WIDTH	J	Max	.031	.039	.048	.054
		Min	.023	.031	.039	.045
SLOT DEPTH	T	Max	.030	.038	.045	.065
		Min	.022	.030	.035	.054
NOMINAL DRILL LOCATION	E		.026	.035	.043	.043
NOMINAL DRILL SIZE			.031	.037	.046	.046
RADIUS	R	Max	.031	.041	.050	.055

LENGTH L	Tolerance	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.									
1/8		1		11		24		39	
3/16		2		12		25		40	
1/4		3		13		26		41	
5/16		4		14		27		42	
3/8	+0	5		15		28		43	
7/16	-1/32	6		16		29		44	
1/2		7		17		30		45	
5/8		8		18		31		46	
3/4		9		19		32		47	
7/8		10		20		33		48	
1				21		34		49	
1-1/4	+0			22		35		50	
1-1/2	-1/16			23		36		51	
1-3/4						37		52	
2						38		53	
Minimum complete thread length of 1-3/4.								54	
2-1/4	+0							55	
2-1/2	-3/32							56	
2-3/4								57	
3									

MATERIAL: Carbon Steel, Specification QQ-W-409 or QQ-S-633, except Bessemer compositions; 55,000 PSI minimum ultimate tensile strength.

FINISH: Plain (untreated).

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35264-1.
(4) Drilled hole to be on center approximately at right angle to the slot but must not break through the base or top (spherical portion) of the head.
(5) Screws shall be free of all loose or hanging burrs or slivers which might become dislodged under usage.
(6) All dimensions in inches.

Ⓑ CANCELLED
SEE SHEET 2

Ⓑ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 15 JUN 1962 Ⓑ 12 NOV 1964

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	SH 69

TITLE
SCREW, MACHINE, DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, PLAIN FINISH, NF-2A AND UNF-2A

MILITARY STANDARD
MS 35264

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-02-23 14:27
Check the source to verify that this is the current version before use.

DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS 5305

NOMINAL SIZE	D		10 (.190)	1/4	5/16	3/8
THREADS PER INCH			32NF	28UNF	24UNF	24UNF
BODY DIAMETER	D_e	Max	.1900	.2500	.3125	.3750
		Min	.1658	.2225	.2806	.3430
HEAD DIAMETER	A	Max	.313	.414	.518	.622
		Min	.292	.389	.490	.590
HEAD HEIGHT	H	Max	.130	.170	.211	.253
		Min	.123	.161	.201	.242
TOTAL HEAD HEIGHT	O	Max	.180	.237	.295	.355
		Min	.165	.219	.276	.333
SLOT WIDTH	J	Max	.060	.075	.084	.094
		Min	.050	.064	.072	.081
SLOT DEPTH	T	Max	.075	.102	.130	.154
		Min	.064	.087	.110	.134
NOMINAL DRILL LOCATION	E		.043	.062	.078	.094
NOMINAL DRILL SIZE			.046	.062	.070	.070
RADIUS	R	Max	.063	.071	.083	.083

LENGTH	L	Tolerance	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN	Dash No.	FIIN
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.	1/8									
	3/16		58							
	1/4		59							
	5/16		60		76					
	3/8	+0	61		77		92			
	7/16	-1/32	62		78		93			
	1/2		63		79		94		107	
	5/8		64		80		95		108	
	3/4		65		81		96		109	
	7/8		66		82		97		110	
	1		67		83		98		111	
	1-1/4	+0	68		84		99		112	
	1-1/2	-1/16	69		85		100		113	
	1-3/4		70		86		101		114	
	2		71		87		102		115	
	2-1/4		72		88		103		116	
Minimum complete thread length of 1-3/4.	2-1/2	+0 -3/32	73		89		104		117	
	2-3/4		74		90		105		118	
	3		75		91		106		119	

MATERIAL: Carbon Steel, Specification QQ-W-409 or QQ-S-633, except Bessemer compositions; 55,000 PSI minimum ultimate tensile strength.

FINISH: Plain (untreated).

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

NOTES:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35264-58.
(4) Drilled hole to be on center approximately at right angle to the slot but must not break through the base or top (spherical portion) of the head.
(5) Screws shall be free of all loose or hanging burrs or slivers which might become dislodged under usage.
(6) All dimensions in inches.

Ⓑ REINSTATED AND CANCELLED AFTER 12 Nov 1964 Use MS35266. INTERCHANGEABILITY RELATIONSHIP - MS35266 can replace the cancelled screws of the same size. The cancelled MS35264 cannot always replace MS35266 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

Ⓑ CANCELLED SEE NOTE

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2. Ⓑ FOR CHANGES SEE SHEETS 1 AND 2.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	WC
Other Cust	SH 69

TITLE: SCREW, MACHINE, DRILLED FILLISTER HEAD, SLOTTED, CARBON STEEL, PLAIN FINISH, NF-2A AND UNF-2A

MILITARY STANDARD

MS 35264

PROCUREMENT SPECIFICATION: FF-S-92

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 (Coordinated) Previous editions of this form are obsolete.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:17:12Z
Check the source to verify that this is the current version before use.