
FED. SUP CLASS
3120

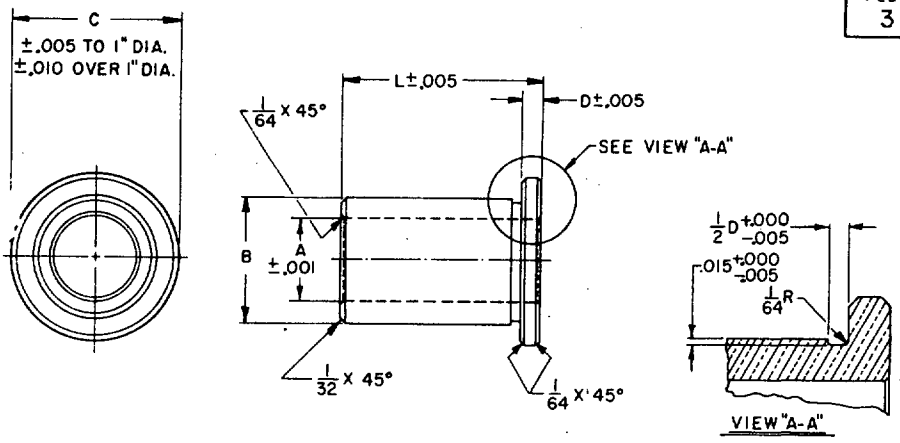


| A-BODY, INSIDE DIAMETER | 1/4 | 5/16 | 3/8 | 7/16 | 1/2 |
|---|---|---|---|---|---|
| B-BODY, OUTSIDE DIAMETER MAX. | .4405 | .503 | .5655 | .628 | .6905 |
| B-BODY, OUTSIDE DIAMETER MIN. | .4395 | .502 | .5645 | .627 | .6895 |
| C-FLANGE DIAMETER | 9/16 | 5/8 | 11/16 | 3/4 | 13/16 |
| D-FLANGE THICKNESS | 3/32 | 3/32 | 3/32 | 3/32 | 3/32 |
| L-LENGTH | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| 5/16 | 1 | 8 | | | |
| 3/8 | 2 | 9 | 17 | | |
| 7/16 | 3 | 10 | 18 | 26 | |
| 1/2 | | 11 | 19 | 27 | 36 |
| 9/16 | | 12 | 20 | 28 | 37 |
| 5/8 | | | 21 | 29 | 38 |
| 3/4 | | | | 30 | 39 |
| 7/8 | | | | 31 | 40 |
| | | | | | 41 |
| | | | | | 42 |

| A-BODY, INSIDE DIAMETER | 9/16 | 5/8 | 11/ 16 | 3/4 | 7/8 |
|---|---|---|---|---|---|
| B-BODY, OUTSIDE DIAMETER MAX. | .753 | .8155 | .878 | 1.003 | 1.128 |
| B-BODY, OUTSIDE DIAMETER MIN. | .752 | .8145 | .877 | 1.002 | 1.127 |
| C-FLANGE DIAMETER | 15/16 | 1 | 1-1/16 | 1-1/4 | 1-3/8 |
| D-FLANGE THICKNESS | 3/32 | 3/32 | 3/32 | 1/8 | 1/8 |
| L-LENGTH | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| 5/8 | 47 | 56 | 65 | | |
| 3/4 | 48 | 57 | 66 | 75 | 84 |
| 7/8 | 49 | 58 | 67 | 76 | 85 |
| 1 | 50 | 59 | 68 | 77 | 86 |
| 1-1/8 | | 60 | 69 | 78 | 87 |
| 1-3/8 | | | 70 | 79 | 88 |
| 1-5/8 | | | | | 89 |

| A-BODY, INSIDE DIAMETER | 1 | 1-1/8 | 1-1/4 | 1-3/8 | 1-1/2 |
|---|---|---|---|---|---|
| B-BODY, OUTSIDE DIAMETER MAX. | 1.253 | 1.378 | 1.503 | 1.6905 | 1.8155 |
| B-BODY, OUTSIDE DIAMETER MIN. | 1.252 | 1.377 | 1.502 | 1.6895 | 1.8145 |
| C-FLANGE DIAMETER | 1-1/2 | 1-5/8 | 1-3/4 | 2 | 2-1/8 |
| D-FLANGE THICKNESS | 1/8 | 1/8 | 1/8 | 5/32 | 5/32 |
| L-LENGTH | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| 7/8 | 94 | 104 | | | |
| 1 | 95 | 105 | 114 | | |
| 1-1/8 | 96 | 106 | 115 | 124 | |
| 1-3/8 | 97 | 107 | 116 | 125 | 133 |
| 1-5/8 | 98 | 108 | 117 | 126 | 134 |
| 1-7/8 | 99 | 109 | 118 | 127 | 135 |
| 2-1/8 | | | 119 | 128 | 136 |
| 2-3/8 | | | | | 137 |

Ⓒ DENOTES CHANGES

REVIEW ACTIVITY: DLA-IS
USER ACTIVITIES: NAVY-MC; ARMY-AR

APPROVED 31 JULY 1956 REVISED Ⓐ 1 DEC. 1961 Ⓑ 14 NOVEMBER 1967 Ⓒ 25 AUGUST 1980

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| P.A. ARMY-AT<br>Other Cust<br>AF- 99 | TITLE<br>BEARING, SLEEVE: FLANGED, COPPER ALLOY | MILITARY STANDARD<br>MS 35772 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>FF-B-195 | SUPERSEDES: | SHEET 1 OF 2 |

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 3120-0556

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3120

| A-BODY, INSIDE DIAMETER | 1-3/4 | 2 | 2-1/4 | 2-1/2 | 2-3/4 |
|---|---|---|---|---|---|
| B-BODY, OUTSIDE DIAMETER MAX. | 2.0655 | 2.378 | 2.628 | 2.878 | 3.130 |
| B-BODY, OUTSIDE DIAMETER MIN. | 2.0645 | 2.377 | 2.627 | 2.877 | 3.128 |
| C-FLANGE DIAMETER | 2-3/8 | 2-3/4 | 3 | 3-1/4 | 3-1/2 |
| D-FLANGE THICKNESS | 5/32 | 3/16 | 3/16 | 3/16 | 3/16 |
| L-LENGTH | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| 1-3/8 | 142 | | | | |
| 1-5/8 | 143 | 152 | | | |
| 1-7/8 | 144 | 153 | | | |
| 2-1/8 | 145 | 154 | 162 | | |
| 2-3/8 | 146 | 155 | 163 | 171 | 181 |
| 2-5/8 | 147 | 156 | 164 | 172 | 182 |
| 3-1/8 | | 157 | 165 | 173 | 183 |
| 3-1/4 | | | | 174 | 184 |
| 3-5/8 | | | | 175 | 185 |
| | | | | 176 | 186 |

| A-BODY, INSIDE DIAMETER | 3 | 3-1/2 | 4 | | |
|---|---|---|---|---|---|
| B-BODY, OUTSIDE DIAMETER MAX. | 3.380 | 4.005 | 4.505 | | |
| B-BODY, OUTSIDE DIAMETER MIN. | 3.378 | 4.003 | 4.503 | | |
| C-FLANGE DIAMETER | 3-3/4 | 4-1/2 | 5 | | |
| D-FLANGE THICKNESS | 3/16 | 1/4 | 1/4 | | |
| L-LENGTH | DASH NO. | DASH NO. | DASH NO. | | |
| 2-1/8 | 191 | | | | |
| 2-3/8 | 192 | | | | |
| 2-5/8 | 193 | | | | |
| 3-1/8 | 194 | | | | |
| 3-1/4 | 195 | 202 | 209 | | |
| 3-5/8 | 196 | 203 | 210 | | |
| 4-1/4 | 197 | 204 | 211 | | |
| 5-1/4 | | | 212 | | |

© REQUIREMENTS:

1. MATERIAL: COPPER ALLOY CASTING, COPPER ALLOY NO. 932, QQ-C-390.
2. SURFACE FINISH: INSIDE AND OUTSIDE DIAMETERS SHALL HAVE A 63 SURFACE FINISH, IN ACCORDANCE WITH USAS1 B46.1.
3. BEARINGS SHALL BE CONCENTRIC WITHIN .002 TOTAL INDICATOR READING FOR UP TO 2 INCH O.D. AND .003 FOR OVER 2 INCH O.D.
4. FLANGE FACES TO BE PARALLEL AND SQUARE WITH O.D. WITHIN .002 TIR UP TO 2 INCH O.D. AND .003 TIR OVER 2 INCH O.D.
5. THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35772-1

© NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

APPROVED 31 JULY 1956 REVISED © FOR CHANGES SEE SHEETS 1 AND 2

| P.A. Other Cust | TITLE: BEARING, SLEEVE: FLANGED, COPPER ALLOY | MILITARY STANDARD |
|---|---|---|
| PROCUREMENT SPECIFICATION | SUPERSEDES: | MS35772 |
| | | SHEET 1 OF 2 |

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.