


FSG. SUP CLASS
2320

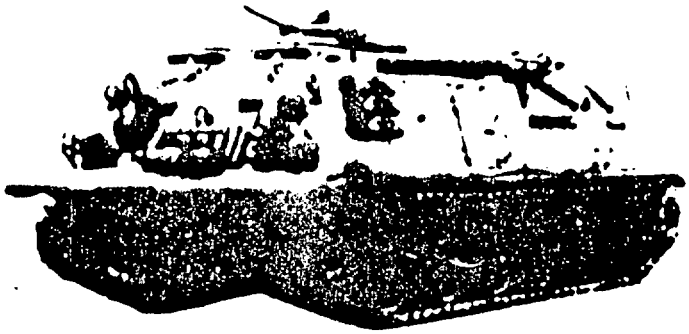

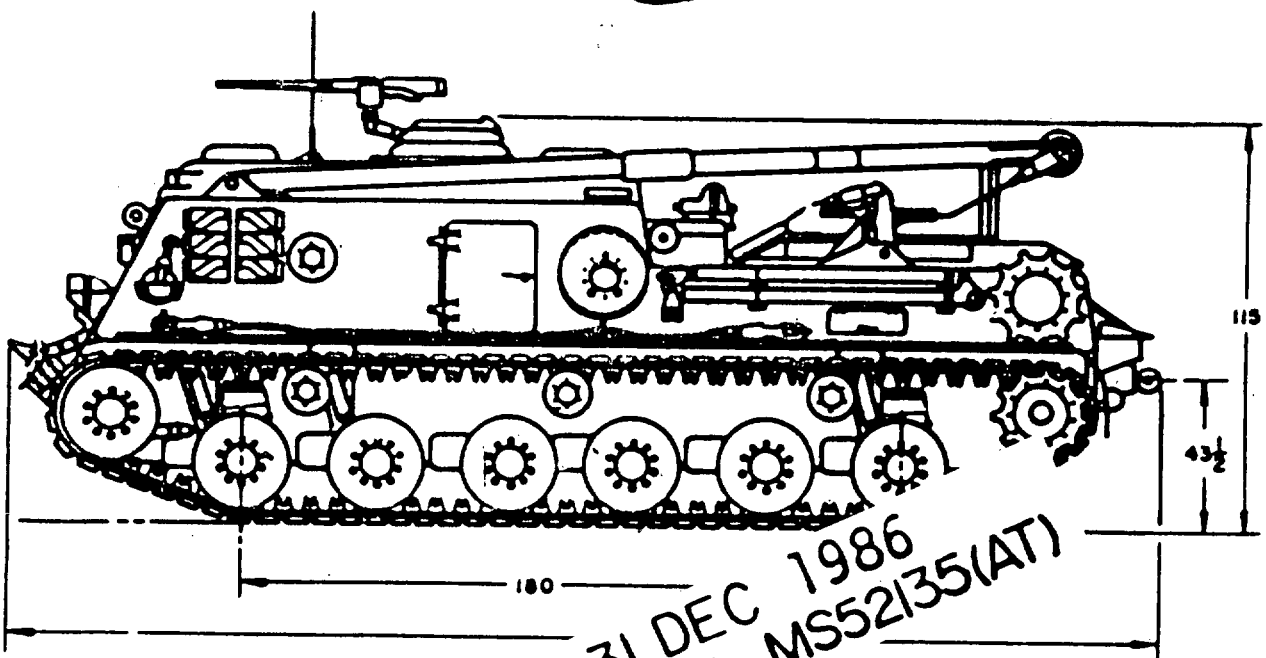

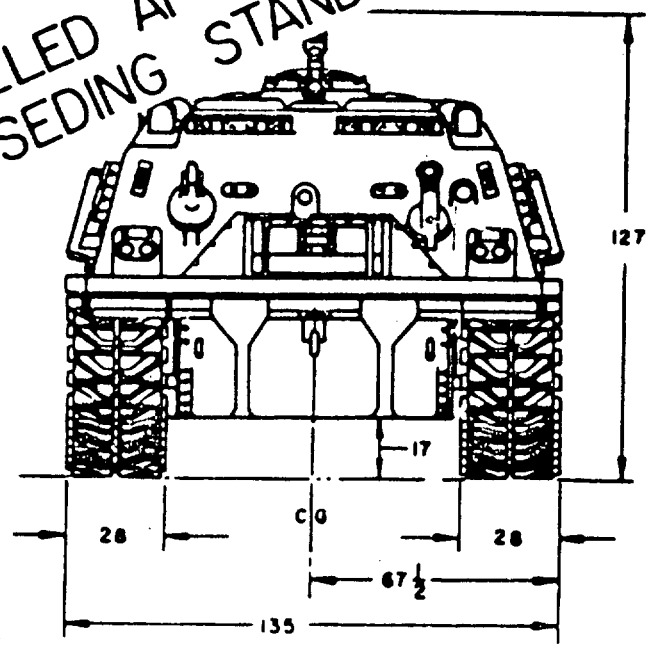

Ⓐ CANCELLED AFTER 31 DEC 1986
SUPERSEDING STANDARD MS52135(AT)

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

Ⓐ DENOTES CHANGE

MS PART NO.	ENGINEERING PARTS LIST
MS 500034-1	8750301

APPROVED 24 JAN 66 REVISED Ⓐ 31 DEC 1986

P.A. MO (ATAC)
Other Cust

TITLE
RECOVERY VEHICLE, FULL-TRACKED:
MEDIUM, M88

MILITARY STANDARD
MS 500034

PROCUREMENT SPECIFICATION
MIL-R-45343

SUPERSEDING

SHEET 1 OF 2

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2020-10-29T20:45Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

WEIGHT:
WEIGHT, COMBAT LOADED, 112,000 LBS.
CREW: 4
WEIGHT, LESS CREW, STOWAGE, AND FUEL:
110,000 LBS.
CENTER OF GRAVITY: 45 IN. ABOVE GROUND
UNIT GROUND PRESSURE: 10.5 LBS./SQ. IN.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

VISION AND SIGHTING EQUIPMENT:
1 W/2 SPARES, PERISCOPE, VISION, DRIVERS:
TYPE M17 P/N 7043549
2 W/1 SPARE HEAD, PERISCOPE, INFRARED VISION,
DRIVERS: TYPE M19, P/N 7652971.

ARMAMENT:
1 MACHINE GUN, CALIBER 50, TYPE M2, HB,
P/N 7265636.
1 LAUNCHER, ROCKET, CALIBER 3.5, P/N 8401842.
2, GUN, SUB-MACHINE, CALIBER 45, TYPE M3A1,
P/N 6721771.
2, RIFLE, 7.62 MM, TYPE M14, P/N 7267000.

AMMUNITION:
1500 ROUNDS, CALIBER, 50
10 ROUNDS, CALIBER, 3.5
360 ROUNDS, CALIBER 45
300 ROUNDS, 7.62 MM
8 HAND GRENADES

RUNNING GEAR:
SUSPENSION, TYPE, TORSION B
12 DUAL WHEELS, SIZE 2
TRACK, TYPE 1107 RUBBE
DOUBLE PIN.
NO. OF TRACK SHOES
WIDTH 28 IN.
24 TIRES, S 6X26.

ELECTRI
INST
NO
300 AMPERES, P/N 8717421.
250 AMPERES, P/N 7402950.
BA , TYPE 6TN, 12 VOLT, P/N MS 35000.
MAGNETO, P/N 7403411.
COIL, P/N 7725157.

POWER PACKAGE:
ENGINE: MODEL, AVSI-1790-6A.
TYPE: 12 CYL., 90, AIR-COOLED, SUPER CHARGED,
FUEL INJECTION.
DISPLACEMENT: 1791.76 CU. IN.
BORE: 5.746 IN., STROKE: 5.750 IN.
GOVERNED SPEED: 2800 RPM.
COMPRESSION RATIO: 5.5:1.
FUEL: GASOLINE, CAPACITY 445 GAL.
MAX. GROSS HORSEPOWER: 980 AT 2800 RPM.
MAX. NET HORSEPOWER: 814 AT 2800 RPM.
MAX. GROSS TORQUE: 1940 LB/FT. AT 2300 RPM.
MAX. NET TORQUE: 1600 LB/FT. AT 2100 RPM.
COOLING SYSTEM: AIR.

ENGINE OIL CAP. 64 QTS.

TRANSMISSION:
MODEL: ALLISON, XT-1410-2A
TYPE: 3 SPEEDS FORWARD, 1 REVERSE.

MAIN WINCH AND SPADE:
INST'L. DWG. NO. 8764530

HOIST WINCH: INST'L. DWG. NO. 8764529.
WINCH CABLE, 200 FT.
BOOM: INST'L. DWG. NO. 8764519.

COMMUNICATIONS:
RADIO SET, AN/GRC-4*8
INTERPHONE MODEL, AN/UIC-1 W/O RADIO

FIRE EXTIN
8, 10
2, 5 , FIXED
, PORTABLE

FULL-81,000 LBS.
POWER TO WEIGHT RATIO:
TION.
ACTIVE EFFORT: 152,000 LBS.
1.357.
AX. SPEED: 30 MPH
MAX. GRADE: 60%
MAX. TRENCH: 103 IN.
MAX. VERTICAL WALL: 42 IN.
CRUISING RANGE: 222 MILES.
MAX. FORDING DEPTH: 102 IN. W/KIT
FORDING KIT PART NO. 10884653

GENERAL:
THE M88 MEDIUM FULL-TRACKED VEHICLE IS INTENDED PRIMARILY FOR RECOVERING TANKS AND OTHER MECHANIZED EQUIPMENT, ESPECIALLY UNDER FIRE FROM FIELD OF BATTLE, BY TOWING OR BY COMBINED LIFTING AND TOWING. THE VEHICLE IS EQUIPPED WITH A TOWING WINCH HAVING A 1-1/4 IN. DIA. CABLE, 200 FEET IN LENGTH, CAPABLE OF A LINE PULL AND LIFTING SPEED OF 90,000 LBS. AT 29 FEET PER MINUTE. ALSO A HOISTING WINCH WITH A 5/8 IN. DIA. CABLE, 400 FEET IN LENGTH, WITH A LINE PULL AND LIFTING SPEED OF 50,000 LBS. AT 9 F. P. M. THE VEHICLE ACCOMMODATES A FOUR MAN CREW CONSISTING OF A COMMANDER, DRIVER, MECHANIC, AND A RIGGER.

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:

U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

(A) DENOTES CHANGE

CANCELLED AFTER 31 DEC 1986
SUPERSEDING STANDARD MS52135(AT)

APPROVED 24 JAN 66 REVISED (A) 31 DEC 1986

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MO (ATACT) Other Cust	TITLE: RECOVERY VEHICLE, FULL-TRACKED: MEDIUM, M88	MILITARY STANDARD MS 500034
PROCUREMENT SPECIFICATION MIL-R-45343	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.