
FED. SUP CLASS
2320

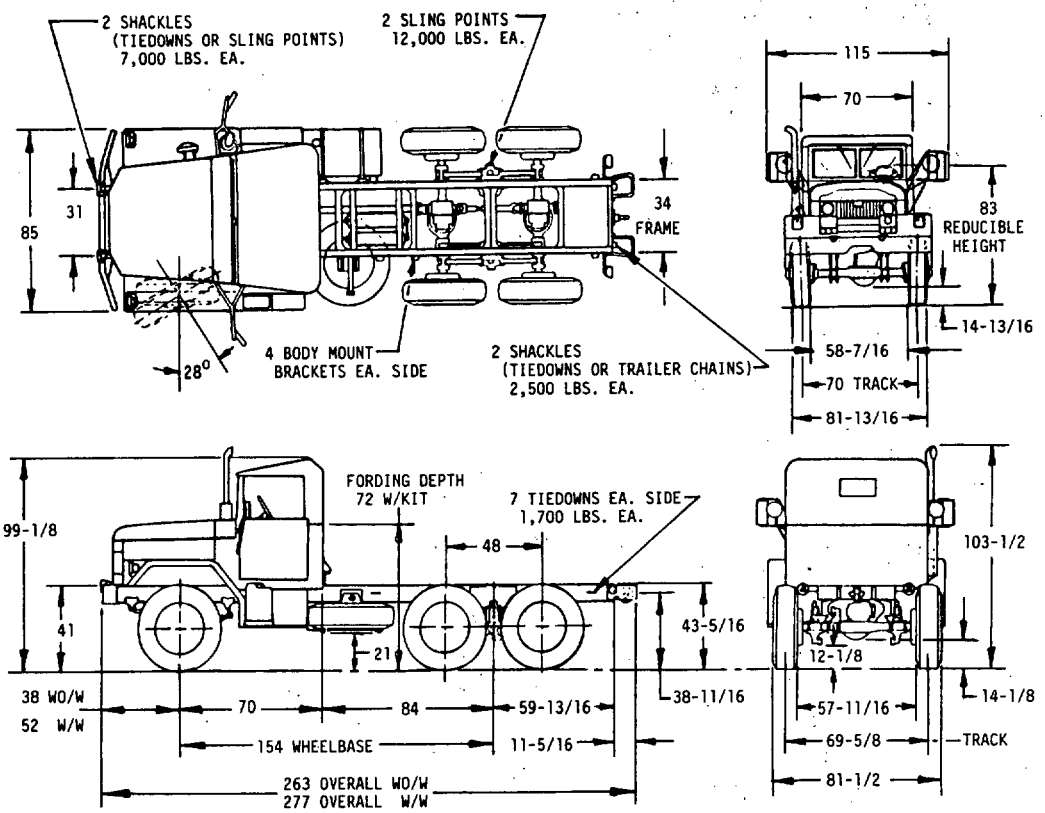

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS500095-1	8736576	WITH WINCH
MS500095-2	8736594	LESS WINCH

APPROVED 12 JUNE 1968 REVISED © 14 JUN 85

© ENTIRE STANDARD REVISED

P.A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		TRUCK, CHASSIS, 2-1/2 TON, 6x6, M44A2	MS500095(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

	WO/W	W/W
CURB WEIGHT FULLY EQUIPPED LESS PAYLOAD AND CREW:		
FRONT	6,325 LBS	6,980 LBS
REAR	4,900 LBS	4,765 LBS
TOTAL	11,225 LBS	11,745 LBS
PAYLOAD: (MAX INCLUDING BODY)	8,000 LBS	8,000 LBS
TOWED LOAD ALLOWANCE:	6,000 LBS	6,000 LBS
SHIPPING DIMENSIONS:		
CUBIC FEET	1,074	1,131
SQUARE FEET	156	164
ANGLE OF APPROACH: (LOADED)	48°	40°
ANGLE OF DEPARTURE: (LOADED)	40°	40°
ANGLE OF BREAKOVER: (LOADED)	37°	37°
MINIMUM TURNING RADIUS: (WALL TO WALL)	444	450

FORDING DEPTH: WITH KIT 72 LESS KIT 30

ENGINE:
6 CYL IN-LINE 11642105
COMPRESSION IGNITION FUEL INJECTION
DISPLACEMENT 478 CU IN
BORE AND STROKE 4.56 X 4.88
COMPRESSION RATIO 22:1
FUEL MULTIFUEL
HORSEPOWER; GROSS 130 @ 2600 RPM
NET 118 @ 2600 RPM
TORQUE GROSS; 305 LB FT @ 1500 RPM
NET 297 LB FT @ 1500 RPM
CRANK CASE CAPACITY; W/O FILTER 20
QTS W/FILTER 22 QTS
GOVERNOR; TYPE AUTOMATIC
COOLING SYSTEM CAPACITY; 32 QTS
PUMP TYPE DRIVE 2 V BELTS
GOVERNED SPEED; 2600 RPM AT FULL LOAD

FUEL SYSTEM: FUEL TANK CAPACITY - 50 GALS FUEL PUMP, IN TANK; FUEL INJECTION. INJECTION PUMP 10935264-2

CLUTCH: TYPE SINGLE DRY DISC DIA 12-15/16
EFFECTIVE AREA 38 SQ IN
PRESSURE PLATE 11601174
OPTIONAL 11621375
DRIVEN MEMBER 11668332

TRANSMISSION: MANUAL WO/W 10872096
W/W 10872194
NO OF SPEEDS - 5 FWD, 1 REV; RATIOS; 1ST - 5.02:1; 2ND - 2.78:1, 3RD - 1.62:1, 4TH - 1:1, 5TH .79:1, REV 4.90:1, PTO OPENING 1, SAE 6 BOLT LEFT SIDE OF TRANSMISSION LUBRICANT CAPACITY W/PTO 5-1/4 QTS; WO/PTO 4-1/4 QTS.

TRANSFER CASE: WO/PTO 11609224
NO OF SPEEDS 2; RATIOS: HIGH 1:1, LOW 1.98:1 CONTROL OF FRONT AXLE DRIVE, AIR ACTUATED, MANUAL ENGAGEMENT LUBRICANT CAPACITY 7 QTS.

PINTLE: 7722050-1
MAX VERTICAL LOAD (STATIC) 600 LBS

BRAKES: PARKING TYPE INTERNAL/EXTERNAL
DRUM SIZE 14 O.D. 13-7/16 ID X 3 WIDE
EFFECTIVE AREA 64 SQ IN

AXLES: FRONT; 7521734-1
REAR; 7521727
QTY 2, TYPE SINGLE SPEED, DOUBLE REDUCTION RATIO 6.72:1, LUBRICANT CAPACITY 6 QTS EACH

FRAME: 11609279
TYPE RAIL CHANNEL SIDE RAIL DIMENSIONS 8 X 3 X 5/16 SECTION MODULUS 8.9 IN^3
NO. OF CROSSMEMBERS 7

FRONT SPRINGS: 11601335
2-1/2 WIDE 48 LONG; NO OF LEAVES 12; RATE 1,100 LB/IN; TYPE SEMI-ELLIPTICAL; SHOCK ABSORBERS DIRECT ACTING, QTY 2.

REAR SPRINGS: 7521792
SIZE 2-1/2 WIDE X 48 LONG NO OF LEAVES 10, RATE 2,405 LB/IN; TYPE SEMI-ELLIPTICAL INVERTED

TIRES W/FLAP AND TUBE: MIL-T-12459
SIZE 11.00 X 20 LOAD RATING RATING F
TREAD DESIGN NDCC NO OF SPARES 1
TUBE ZZ-I-550

WHEELS: TYPE STEEL DISC, 7389617
SIZE 20 DIA X 7-1/2 WIDE RING 7389061
FRONT SINGLE, REAR SINGLE OFFSET 5-1/8

BRAKES: SERVICE, TYPE AIR ASSISTED HYDRAULIC, INTERNAL EXPANDING DRUM
SIZE 15 X 3, EFFECTIVE AREA
FRONT 190 SQ IN REAR 380 SQ IN

ELECTRICAL SYSTEM: WATERPROOFED, RADIO SUPPRESSED PER MIL-STD-461.
POTENTIAL 24 V STARTING MTR MS53011-2
ALTERNATOR 10929868
RATING 60 AMP; DRIVE 2 V BELTS
BATTERIES; QTY 2 TYPE 12V 6TN MS35000-4
TRAILER COUPLING SOCKET 8376209
TURN SIGNAL; SOLID STATE FLASHER 11613631
CONTROL 11613632
LIGHTING; HEADLAMPS 8741462
B.O. DRIVING LAMP 11668932
COMPOSITE LAMPS; FRONT 11614156
REAR 11614157

PERFORMANCE: APPROX 6 MILES PER GALLON
300 MILES CRUISING RANGE GRADEABILITY; WITH GVW OF 20,145 LBS
1ST 60% MAXIMUM SPEED 56 MPH AT ENGINE GOVERNED SPEED 2600 RPM
W/DIESEL FUEL, TYPE VV-F-800

CAB: TYPE STD CANVAS; ARCTIC HARDTOP KIT; CAPACITY 2.

WINCH: 7538687
CAPACITY 6,100 LBS
WIRE ROPE CABLE 1/2 IN DIA CABLE LENGTH 200 FT

STEERING: 10897162
TYPE CAM & TWIN LEVER WO/POWER ASSIST
RATIOS: 23.4:1, 19.5:1, 23.4:1

TIEDOWNS: 14 U-BOLTS, 7 EACH SIDE 11647735
2 FRONT LIFTING SHACKLES 12301040
2 REAR SHACKLES 7539662

ACCESSORY/SUPPLEMENTAL KITS: 12300812

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZED LIST ITEMS 12300998

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS500095-1	8736576	WITH WINCH
MS500095-2	8736594	LESS WINCH

© ENTIRE STANDARD REVISED

APPROVED 12 JUNE 1968 REVISED © 14 JUN 85

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK, CHASSIS, 2-1/2 TON, 6x6, M44A2	MILITARY STANDARD MS500095(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.