FED. SUP CLASS
5315

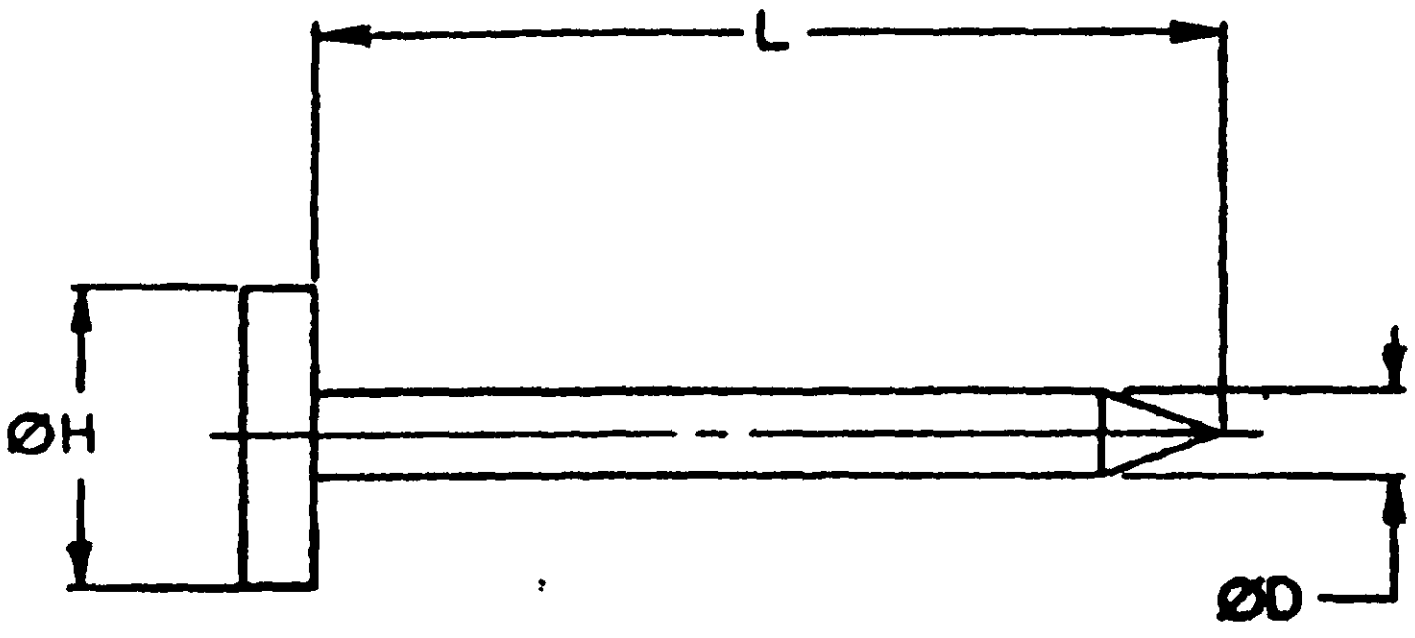

TABLE I. DASH NUMBERS AND DIMENSIONS

GYPSUM WALLBOARD NAIL (SMOOTH SHANK)				
DASH NUMBER	ØD ±.004	ØH	L ±1/16	NUMBER PER LB (APPROX)
101B	.0[illegible]	.297 ±.020	1 1/8	433
102B	.092	.375 ±.037	1 1/8	449
103B	.082	.297 ±.020	1 1/4	425
104B	.082	.375 ±.037	1 3/4	294
105B	.106	.375 ±.037	1 1/4	318

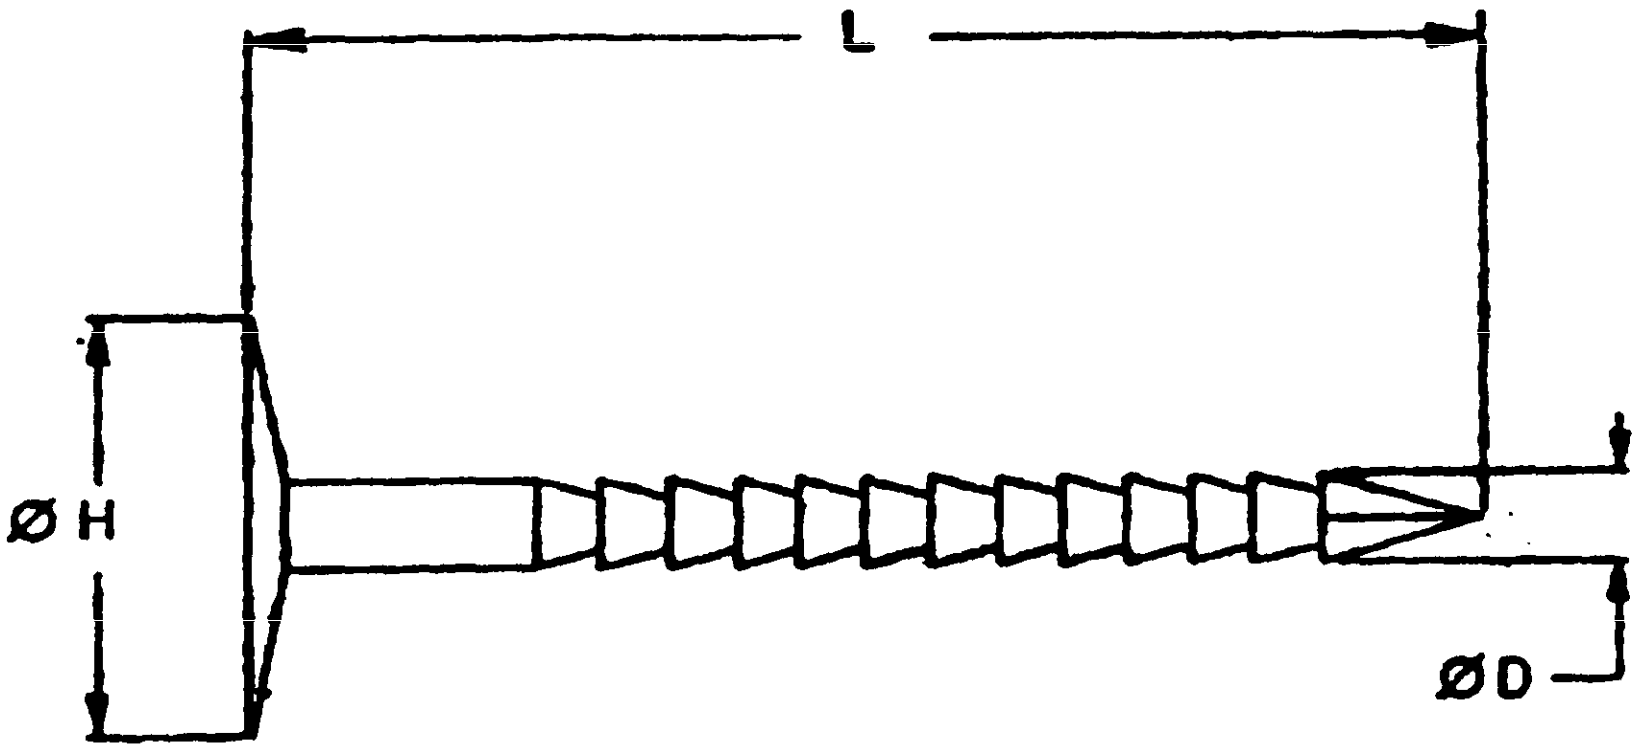

TABLE II. DASH NUMBERS AND DIMENSIONS

GYPSUM WALLBOARD NAIL (MECHANICALLY DEFORMED SHANK)					
DASH NUMBERS		ØD ±.003	ØH +.047 -.031	L ±1/16	NUMBER PER LB (APPROX)
UNCOATED (BRIGHT)	BLUED				
201	201B	.099	.250	1 1/8	[illegible]
202	202B	.099	.250	1 1/4	345
203	203B	.099	.250	1 3/8	320
204	204B	.099	.250	1 1/2	290
205	205B	.099	.250	1 5/8	270

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

REVIEWER ACTIVITIES:
NAVY-SA
AIR FORCE-82

CIVIL AGENCY COORDINATING ACTIVITIES:
GSA-FSS

USER ACTIVITIES:
ARMY-CE, ME
NAVY-AS, MC, SH
NSA-NS

AMSC N/A

REVISED

APPROVED 28 JUL 66

PA ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NAIL, GYPSUM, WALL BOARD	MILITARY STANDARD MS51539
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 71 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5315-0396

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5315

REQUIREMENTS:

1. MATERIAL: . NAIL, TYPE II, STYLE 19 SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.

2. CHARACTERISTICS:

   A. SMOOTH SHANK. NAIL SHALL HAVE A FLAT HEAD, DIAMOND POINT, ROUND SMOOTH SHANK AND BLUED FINISH.

   B. MECHANICALLY DEFORMED SHANK. NAIL SHALL HAVE A FLAT SLIGHTLY COUNTERSUNK HEAD, LONG DIAMOND POINT, ROUND MECHANICALLY DEFORMED SHANK AND BRIGHT (SEE NOTE 2) OR BLUED FINISH.

3. HEAD DIAMETER:

   A. SMOOTH SHANK. THE DIFFERENCE IN DIAMETERS ACROSS LONG AXIS SHALL NOT EXCEED THAT ACROSS THE SHORT AXIS BY MORE THAN 10 PERCENT. A FILLET SHALL BE PROVIDED UNDER THE HEAD, AN ANGLE OR RADIUS WILL BE ACCEPTABLE. HEADS WILL BE WELL CENTERED.

   B. MECHANICALLY DEFORMED SHANK. THE HEADS SHALL BE THIN (APPROXIMATELY .015 INCH) AT THE PERIPHERAL EDGE. THEY SHALL BE UNIFORMLY TAPERED TO A SMALL FILLET AROUND THE SHANK, AND SHALL BE FREE FROM PROTRUSIONS UNIFORMLY TAPERED TO A SMALL FILLET AROUND THE SHANK, AND SHALL BE FREE FROM PROTRUSIONS AND SHARP, IRREGULAR EDGES.

4. CLEARANCE: SHOULD A DEFORMATION PROCESS PRODUCE OTHER THAN A SMOOTH-SHANK NAIL, A CLEARANCE AREA (ROUND AND SMOOTH), MEASURED FROM THE TOP OF THE HEAD TO THE DEFORMED SECTION, SHALL BE PROVIDED EQUAL TO THE NOMINAL THICKNESS OF GYPSUM WALLBOARD FOR WHICH THE NAILS ARE SPECIFIED. THIS IS IN ACCORDANCE WITH ASTM C-514 "NAILS FOR THE APPLICATION OF GYPSUM WALLBOARD".

5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I OR TABLE II.

EXAMPLE: MS51539-2020
- 2020 — DASH NUMBER FROM TABLE II
- MS51539 — BASIC MS NUMBER

MS51539-2020 INDICATES - NAIL, .099 DIAMETER, 1 1/4 LONG, .250 HEAD DIAMETER MECHANICALLY DEFORMED SHANK AND BLUED FINISH

EXAMPLE: MS51539-1020
- 1020 — DASH NUMBERS FROM TABLE I
- MS51539 — BASIC MS NUMBER

MS51539-1020 INDICATES - NAIL, .098 DIAMETER, 1 1/8 LONG, .375 HEAD DIAMETER, SMOOTH SHANK, BLUED FINISH

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. BRIGHT FINISH IS A TERM APPLIED TO NAILS WITH NATURAL BASE FINISH RESULTING FROM CLEANING OF NAILS, WHICH HAVE NOT UNDERGONE TREATMENTS AFFECTING FINISH, SUCH AS HARDENING, BLUING, COATING, PLATING, ETCHING, AND PAINTING.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 26 JUL 56 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for superseding document shall be made from this document when applicable.

REVIEWER ACTIVITIES:
NAVY-SA
AIR FORCE-82

CIVIL AGENCIES COORDINATING ACTIVITIES:
GSA-FSS

USER ACTIVITIES:
ARMY-CE,ME
NAVY-AS,MC,SH
NSA-NS

CUST. ARMY-AR Other Cust NAVY-YD AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NAIL, GYPSUM, WALL BOARD	MILITARY STANDARD MS51539
PROCUREMENT SPECIFICATION FF-N-105	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 71 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5315-0396

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:06Z
Check the source to verify that this is the current version before use.