INCH-POUND

MS51819F
w/AMENDMENT 2
21 November 2019
SUPERSEDING
MS51819F
w/AMENDMENT 1
26 April 2019

DETAIL SPECIFICATION SHEET

ADAPTER, STRAIGHT, PIPE TO TUBE
MALE PIPE END, FLARELESS TYPE, HYDRAULIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

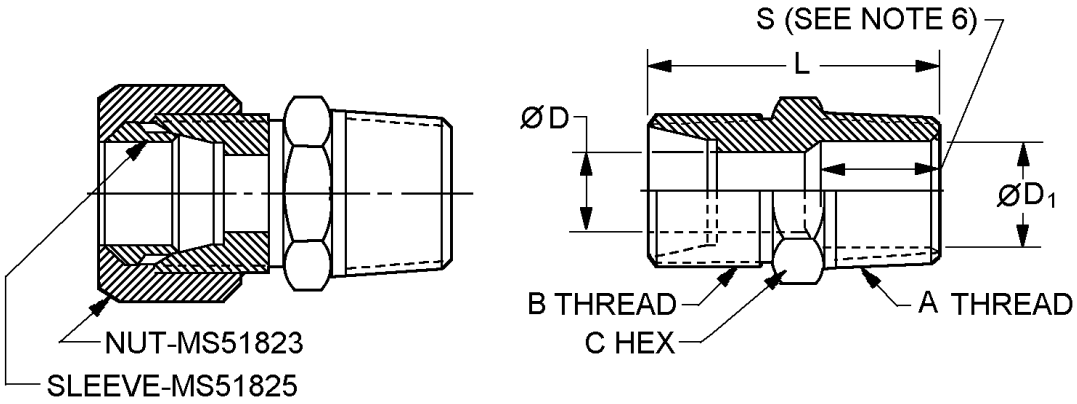


FIGURE 1. Adapter pipe to tube.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Dash number		Tube OD Nom inches (mm)	A Thread NPTF	B Straight thread Class 2A	C Hex flat Nom (see note 7)
Assembly	Body (see note 5)				
-1	-31	.1250 (3.175)	.125 -27	.3125 - 24UNF	7/16
-2	-32	.1875 (4.763)	.125 -27	.3750 - 24UNF	7/16
-3	-33	.2500 (6.350)	.125 -27	.4375 - 20UNF	1/2
-4	-34	.3125 (7.936)	.125 -27	.5000 - 20UNF	9/16
-7	-37	.3750 (9.525)	.250 - 18	.5625 - 18UNF	5/8
-9	-39	.5000 (12.700)	.375 - 18	.7500 - 16UNF	13/16
-12	-42	.6250 (15.875)	.500 - 14	.8750 - 14UNF	7/8
-14	-44	.7500 (19.050)	.750 - 14	1.0625 - 12UN	1 1/8
-15	-45	.8750 (22.225)	.750 - 14	1.1875 - 12UN	1 1/4
-18	-48	1.0000 (25.400)	1.000 - 11 1/2	1.3125 - 12UN	1 3/8
-20	-50	1.2500 (31.750)	1.250 - 11 1/2	1.6250 - 12UN	1 11/16
-21	-51	1.5000 (38.100)	1.500 - 11 1/2	1.8750 - 12UN	2
-22	-52	2.0000 (50.800)	2.000 - 11 1/2	2.5000 - 12UN	2 5/8

Dash number		D dia. Drill	D_1 dia. Drill	L inches (mm) ±.02 (0.51)	S max inches (mm)
Assembly	Body (see note 5)				
-1	-31	.093 (2.36)	.188 (4.78)	1.04 (26.42)	.49 (12.45)
-2	-32	.125 (3.18)	.188 (4.78)	1.09 (27.69)	.49 (12.45)
-3	-33	.203 (5.16)	.188 (4.78)	1.12 (28.45)	.55 (13.97)
-4	-34	.234 (5.94)	.188 (4.78)	1.12 (28.45)	.55 (13.97)
-7	-37	.281 (7.14)	.281 (7.14)	1.34 (34.04)	---
-9	-39	.422 (10.72)	.406 (10.31)	1.44 (36.58)	.67 (17.02)
-12	-42	.500 (12.70)	.531 (13.49)	1.75 (44.45)	.91 (23.11)
-14	-44	.656 (16.66)	.719 (18.26)	1.88 (47.75)	.94 (23.88)
-15	-45	.718 (18.24)	.719 (18.26)	1.88 (47.75)	---
-18	-48	.875 (22.23)	.938 (23.83)	2.07 (52.58)	1.13 (28.70)
-20	-50	1.093 (27.76)	1.250 (31.75)	2.18 (55.37)	1.20 (30.48)
-21	-51	1.344 (34.14)	1.500 (38.10)	2.28 (57.91)	1.27 (32.26)
-22	-52	1.813 (46.05)	1.938 (49.23)	2.46 (62.48)	1.37 (34.80)

FIGURE 1. Adapter pipe to tube - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Non-standard sizes Dash number		Tube OD Ends Nom inches (mm)	A Pipe thread NPTF	B Straight thread Class 2A	C Hex flat Nom (see note 7)
Assembly	Body (see note 5)				
-5	-35	.250 (6.35)	.250 - 18	.4375 - 20UNF	9/16
-6	-36	.313 (7.95)	.250 - 18	.5000 - 20UNF	9/16
-8	-38	.500 (12.70)	.250 - 18	.7500 - 16UNF	13/16
-10	-40	.625 (15.88)	.375 - 18	.8750 - 14UNF	7/8
-11	-41	.375 (9.53)	.500 - 14	.5625 - 18UNF	7/8
-13	-43	.750 (19.05)	.500 - 14	1.0625 - 12UN	1 1/8
-16	-46	.875 (22.23)	1.000 - 11 1/2	1.1875 - 12UN	1 3/8
-17	-47	1.000 (25.40)	.750 - 14	1.3125 - 12UN	1 3/8
-19	-49	1.250 (31.75)	1.000 - 11 1/2	1.6250 - 12UN	1 11/16

Non-standard sizes Dash number		D dia. Drill	D_1 dia. Drill	L inches (mm) ±.02 (0.51)	S max inches (mm)
Assembly	Body (see note 5)				
-5	-35	.203 (5.16)	.281 (7.14)	1.32 (33.53)	.69 (17.53)
-6	-36	.234 (5.94)	.281 (7.14)	1.32 (33.53)	.69 (17.53)
-8	-38	.422 (10.72)	.281 (7.14)	1.44 (36.58)	.67 (17.02)
-10	-40	.500 (12.70)	.406 (10.31)	1.56 (39.62)	.77 (19.56)
-11	-41	.281 (7.14)	.531 (13.49)	1.60 (40.64)	.91 (23.11)
-13	-43	.656 (16.66)	.531 (13.49)	1.88 (47.75)	.86 (21.84)
-16	-46	.718 (18.24)	.938 (23.83)	2.07 (52.58)	1.13 (28.70)
-17	-47	.875 (22.23)	.719 (18.26)	1.88 (47.75)	.86 (21.84)
-19	-49	1.093 (27.76)	.938 (23.83)	2.15 (55.50)	.90 (22.86)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Remove all burrs and slivers.
4. Dimensions and tolerances not shown shall be in accordance with SAE-J514.
5. Assemblies are only furnished to this specification (body, nut, and sleeve). Bodies are not to be stocked, stored, or issued.
6. At manufacturers option, through passages may conform with the smaller diameter specified, or the appropriate end may be counterbored to the larger diameter for depth “S”.
7. Across flat widths must fit standard wrench openings, see ASME B18.2.2.
8. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Adapter pipe to tube - Continued.

REQUIREMENTS:

Adapter pipe to tube shall be as specified on figure 1 and in table I.

Materials shall be in accordance with MIL-DTL-18866.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Finish. Finishes shall be as specified in table I.

All plating's shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of red corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.


TABLE I. Material and finish identification codes.

PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/ 5/ 7/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC. 2/
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 2/ 3/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 1. 4/
R	Steel	Zinc plating in accordance with ASTM B633; type III or V, Fe/Zn 8. 4/ 5/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7, free machining alloy UNS S30300 method 1, type 2 or 4.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 6/ 8/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 6/ 8/
Z	Steel	Zinc plating in accordance with ASTM B633, type VI, Fe/Zn 8. 4/
ZC	Steel	Zinc may be any zinc plating from PIN codes J and R with a colored chromate coating. 4/ 5/

1/ Embrittlement test need not be run.
2/ Hexavalent chromium free. Finish shall be RoHS compliant.
3/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum.
4/ Not for use in aircraft. Requires approval from the Program Office for all applications. Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook.
5/ These finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended for Army ground systems.
6/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to SAE-AMS-STD-595 colors 36076 through 36293.
7/ Cadmium shall not be used in oxygen or potable water systems. Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA. The use of cadmium plating for Army vehicles is prohibited unless otherwise explicated stated in the contract as a requirement.
8/ Titanium shall not be used in oxygen or potable water systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): The PIN consists of the letters “MS”, the specification number, a dash, number for adapter assembly/tube size, a letter for material finish designator and a letter for a sleeve designator.

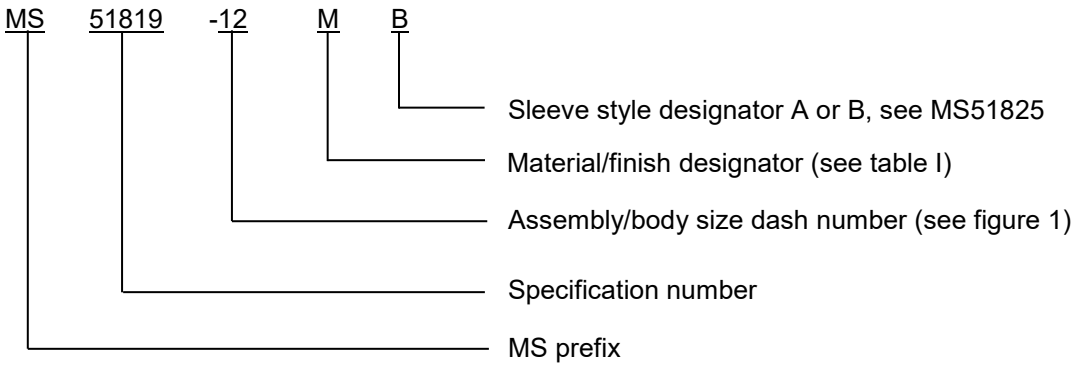

PIN example: MS51819-12MB indicates an adapter pipe to tube assembly, .6250 inch (15.875 mm) tube OD, to 1/2 NPTF, Nickel-copper alloy, and B style sleeve.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

The use of cadmium plating for Army vehicles is prohibited unless otherwise explicated stated in the contract as a requirement.

Class I and II ozone depleting substances (ODS) shall not be used in MS51819 or any referenced procedures.

Tapered pipe thread connections are generally prohibited in high shock applications.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table II provides a detail reference data listing for MS39206 to MS51819. This table contains coordination of equivalent tube sizes, in both compression and hydraulic type adapters. Assembly replacement is authorized.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.

TABLE II. Assembly equivalency (for information only).

PIN		PIN		PIN	
Compression MS39206	Hydraulic MS51819	Compression MS39206	Hydraulic MS51819	Compression MS39206	Hydraulic MS51819
-1	-1	-8	-8	-15	-15
-2	-2	-9	-9	-17	-16
-3	-3	-10	-10	-16	-17
-4	-4	-11	-11	-18	-18
-5	-5*	-12	-12	-19	-19
-6	-6*	-13	-13	-20	-20
-7	-7	-14	-14	-21	-21

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

MIL-DTL-16232
MS39206
MS51823
MS51825
ASME B18.2.2
ASTM B117
ASTM B633
ASTM F1136/F1136M
ASTM MNL37
SAE-AMS-C-81562
SAE-AMS-QQ-P-416
SAE-AMS-STD-595/36076
SAE-AMS-STD-595/36081
SAE-AMS-STD-595/36099
SAE-AMS-STD-595/36118
SAE-AMS-STD-595/36134
SAE-AMS-STD-595/36152
SAE-AMS-STD-595/36170
SAE-AMS-STD-595/36173
SAE-AMS-STD-595/36176
SAE-AMS-STD-595/36231
SAE-AMS-STD-595/36251
SAE-AMS-STD-595/36270
SAE-AMS-STD-595/36280
SAE-AMS-STD-595/36293
SAE-AMS2417
SAE-AMS2486
SAE-AMS2488
SAE-AMS2700
SAE-J514
T9070-AL-DPC-020/077-2

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2019-082)

Review activities:
Army - AR, MI
Navy - AS, CG, SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:08Z
Check the source to verify that this is the current version before use.