

FED. SUP CLASS
2320

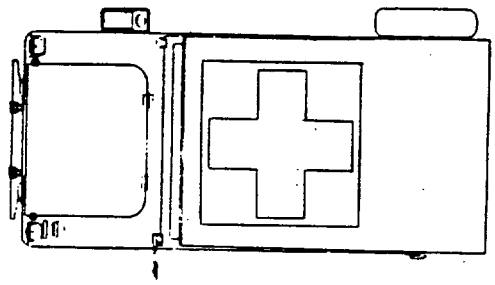

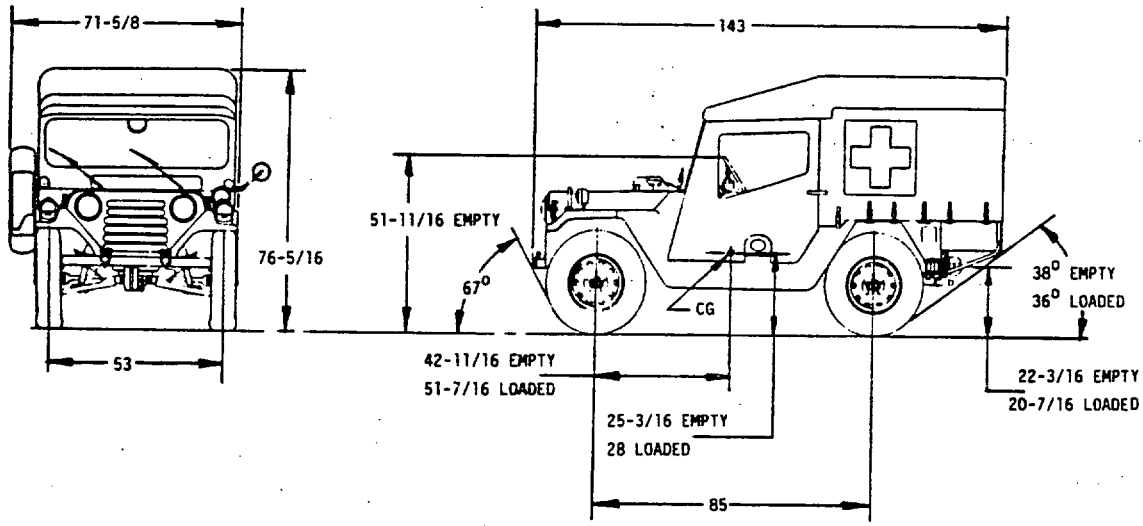

VEHICLE CHARACTERISTICS

WEIGHT, CURB FULLY EQUIPPED, LESS PAYLOAD AND PERSONNEL:

FRONT AXLE	1370 LBS
REAR AXLE	1380 LBS
TOTAL	2750 LBS

NOTE: ADD 450 LBS FOR TWO MAN CREW

GROSS LOAD, LOADED: 900 LBS

TOWED LOAD ALLOWANCE, LOADED: NONE AUTHORIZED

SHIPPING DIMENSIONS:

CU. FT. - 455.0	REDUCIBLE TO 285.0
SQ. FT. - 71.2	REDUCIBLE TO 66.2
LENGTH - 143 IN.	NOT REDUCIBLE
WIDTH - 71-5/8 IN.	REDUCIBLE TO 65-15/16 IN.
HEIGTH -76-5/16 IN.	REDUCIBLE TO 51-11/16 IN.

CENTER OF GRAVITY (AT CURB WEIGHT):
ABOVE GROUND - 25-3/16 IN.
REAR OF CENTERLINE OF FRONT AXLE - 42-11/16 IN.

CENTER OF GRAVITY (W/PAYLOAD):
ABOVE GROUND - 28 IN
REAR OF CENTERLINE OF FRONT AXLE - 51-7/16 IN.

TREAD: FRONT 53 IN., REAR 53 IN.

CAB TO REAR AXLE N.A.: 20-7/16 IN.

SERVICE BRAKES: TYPE - DUO-SERVO SINGLE ANCHOR; DRUM SIZE - 9-1/8 X 2 IN. FRONT & REAR; EFFECTIVE AREA - 115 SQ. IN. FRONT & REAR; ACTUATION - HYDRAULIC; SINGLE BRAKE LINES; 60% FRONT - 40% REAR.

PERFORMANCE: MI, PER GAL - 17.4 WITH 900 LB PAYLOAD SPEED - 56 MPH; GRADEABILITY -

4TH GEAR 6.5% FOR GVW OF	3650 LBS
1ST GEAR 60% FOR GVW AT	3650 LBS
CRUISING RANGE	275 MI

WINCH: NONE

TIEDOWNS: NO. - 4 ; LOCATION - 2 @ FRONT BUMPER; 2 @ REAR SILL.

FUEL SYSTEM: CARBURETOR (EMISSION CARB.) 11681709
TYPE - SIDE DRAFT; FUEL PUMP - 11640994
TYPE - MECHANICAL; FUEL CAPACITY 15.8 GALS

CLUTCH: 11669136
TYPE - SINGLE DRY DISC.; DIA. - 8-7/16 IN.
EFFECTIVE AREA - 68.11 SQ.IN.

TRANSMISSION: 7536199
NO OF SPEEDS - 4 FWD. & 1 REV.; RATIOS - 1ST 5.172, 2ND 3.179 3RD 1.674 4TH 1.0, REV. 7.497: PTO OPENINGS - NONE; LUBRICANT CAPACITY - 5.5 PTS. INCLUDING TRANSFER CASE

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52170-1	8736906	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY -AT Other Cust	TITLE TRUCK AMBULANCE 1/4 TON 4x4 M718A1	MILITARY STANDARD MS52170(AT)
PROCUREMENT SPECIFICATION MIL-T-45331	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

MINIMUM GROUND CLEARANCE: REAR AXLE 10-15/16 *IN. UNDER CHASSIS 9*IN. *AT FULL PAYLOAD WEIGHT **AT REAR SHOCK BRACKET.

ANGLE OF APPROACH: 67°

ANGLE OF DEPARTURE: 36°

RAMP BREAKOVER ANGLE: 43°

MINIMUM TURNING DIA: (WALL TO WALL) LEFT 38-1/2 FT. RIGHT 38-1/2 FT. OUTERMOST POINT - FRONT FENDER

FORDING DEPTH: WITH KIT 60 IN LESS KIT 21 IN.

ENGINE: TYPE-GASOLINE, LIQUID COOLED OHV; DISPLACEMENT - 141.5 CU. IN., BORE AND STROKE - 3-7/8 X 3.00; COMPRESSION RATIO-7.5:1, FUEL - REGULAR GRADE, 91 RON MINIMUM (RESEARCH OCTANE NUMBER); LUBRICATION - WET SUMP; CRANKCASE CAP. - 5 QTS. DRY - 4 QTS. REFILL; GOVERNOR - NONE, COOLING SYSTEM CAP. - 9 QTS. PUMP DRIVE V-BELT. (PRE EMISSION) 11660425
HORSEPOWER - MAX. GROSS 71 @ 4000 RPM; MAX. NET 61 @ 3600 RPM.
TORQUE MAX. GROSS 128 LB-FT @ 1800 RPM; MAX. NET 119 LB-FT @ 1700 RPM
11613729
-73/74 EMISSION ENGINE
HORSEPOWER - MAX. GROSS 65 @ 4000 RPM; MAX. NET 55 @ 3600 RPM.
TORQUE MAX. GROSS 113 LB-FT @ 1800 RPM; MAX NET 104 LB-FT. @ 2000 RPM.

STEERING: 11639799
TYPE - WORM & DOUBLE ROLLER; RATIO - 16.4 TO 1; POWER ASSIST - NONE.

ELECTRICAL SYSTEM: WATERPROOF - YES; RADIO SUPPRESSED PER MIL-STD-461; POTENTIAL - 24 VOLT; STARTING MOTOR - 7017646
ALTERNATOR 10929868
RATING - 60 AMPERES; DRIVE-V-BELT;
BATTERY - MS35000-1;
TYPE - 2HN; QUANTITY - 2; COIL 11663066

PINTLE HOOK: 8380198 2000 LBS

ACCESSORY KITS: 12302575

BASIC ISSUE ITEMS DRAWING NO. 12300877-5

TRANSFER CASE: 10885542
(INTEGRAL WITH TRANSMISSION): SINGLE SPEED RATIO - 1:1, CONTROL OF FRONT AXLE DRIVE SPLINED COLLAR WITH SPRING LOADED FORK; LUBRICANT CAPACITY - (SEE TRANSMISSION) PTS

FRONT & REAR DIFFERENTIAL: 7536140
TYPE - SUSPENDED CARRIER WITH CARDAN JOINTS; RATIO - 4.86; LUBRICANT CAPACITY-1 QT.

FRAME: TYPE - UNIT BODY & FRAME; NO OF CROSSMEMBERS - 4; SECTION MODULUS - VARIABLE; DIMENSIONS - MAIN RAIL 7-7/8 x 1-3/4 X 1/16 IN.; REINFORCED - YES.

FRONT SUSPENSION: TYPE - COIL SPRING: 5/8 WIRE; 4 IN DIA., 11 IN. FREE LENGTH; NO. COILS - 8: RATE - 513 ± 16 LB/IN.; SHOCK ABSORBERS - TELESCOPIC.

REAR SUSPENSION: TYPE - COIL SPRING; 9/16 WIRE; 3-13/16 IN. DIA., 12-7/8 IN. FREE LENGTH NO. COILS - 9-1/8; RATE - 337 ± 15 LB IN.; SHOCK ABSORBERS - TELESCOPIC.

WHEELS: 10921860
TYPE - DROP CENTER; DIA. - 16 IN.; BEAD - LOCK - HUMP TYPE; SINGLE REAR - YES; RIM SIZE - 5-1/2 IN

TIRES: TYPE - LIGHT TRUCK; SIZE - 7.00 X 26; PLY - 4 (6 PLY RATING); LOAD RANGE C; TREAD - NON-DIRECTIONAL, CROSS COUNTRY; NO. SPARES - 1.

PARKING BRAKES: 8754237
TYPE - EXTERNAL BAND ON TRANSMISSION OUTPUT SHAFT; DRUM SIZE - 6 IN. DIA. X 1 IN. WIDE; EFFECTIVE AREA - 15.6 SQ. IN.

LIGHTING: HEADLAMPS 8741462
B.O. DRIVING LAMP - 8747988
TRAILER COUPLING SOCKET - 8712356
COMPOSITE LIGHT, FRONT - 11614156
COMPOSITE LIGHT, TAIL - 11614157
TURN SIGNALS, FLASHER TYPE; CONTROL UNIT 11613532
FLASHER 11613631

OVE DRAWING NO. 12300998-4

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING NO	DESCRIPTION
MS52170-1	8736906	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY - AT
Other Cust

TITLE
TRUCK AMBULANCE 1/4 TON
4x4 M718A1

MILITARY STANDARD
MS52170(AT)

PROCUREMENT SPECIFICATION
MIL-T-45331

SUPERSEDES:

SHEET 2 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.