

Form Approved
OMB No. 0704-0188

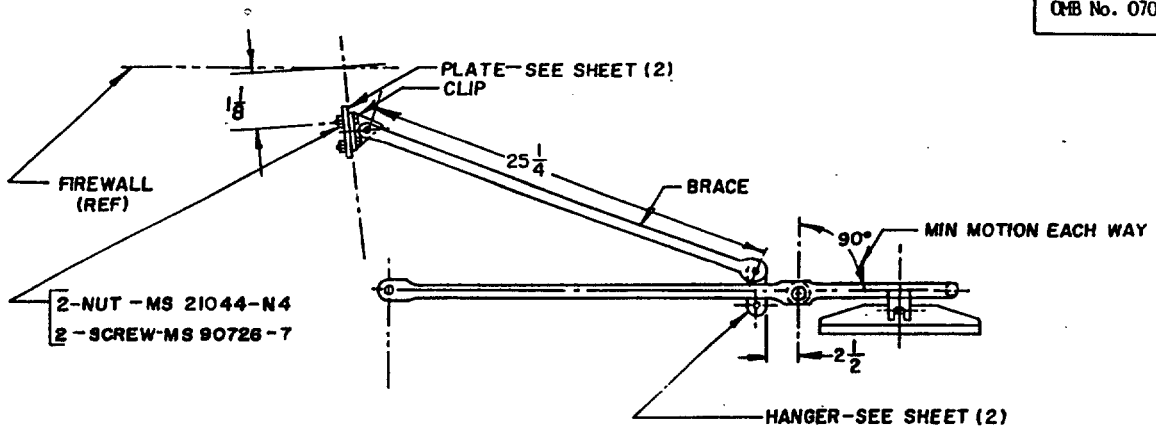

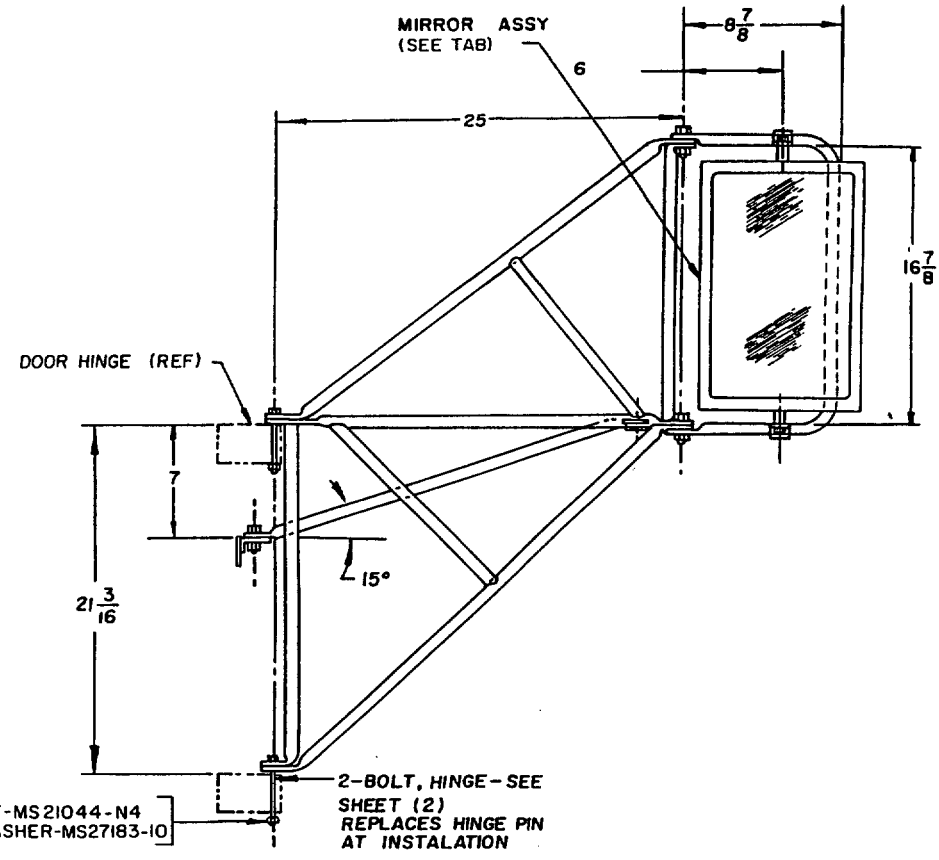

MS53016 DASH NO.	ARMY DRAWING NO.	MIRROR ASSY NO.	POSITION
-1	7018838	MS53015-2	RIGHT HAND
-2	7018839	MS53015-2	LEFT HAND
-3	7018838*	MS53015-3	RIGHT HAND
-4	7018839*	MS53015-4	LEFT HAND

* EXCEPT USE MS53015-3 AND -4 AS REQUIRED.

INCH-POUND (D)

MS53016-1 SHOWN

(D) DENOTES CHANGES

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: NONE

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY- AT NAVY-
AIR FORCE- 99 DLA-

REVIEW: CS
USER: ME MC

PROJECT NUMBER: 2540-A027

MILITARY SPECIFICATION SHEET

TITLE:

MIRROR AND BRACKET ASSEMBLY, REARVIEW

SPECIFICATION SHEET NUMBER:
MS53016D
4 NOVEMBER 1991


SUPERSEDING: MS53016C
26 MARCH 1979


AMSC-NA **FSC-** 2540


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


https://assist.dla.mil -- Downloaded: 2020-01-20T20:20Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

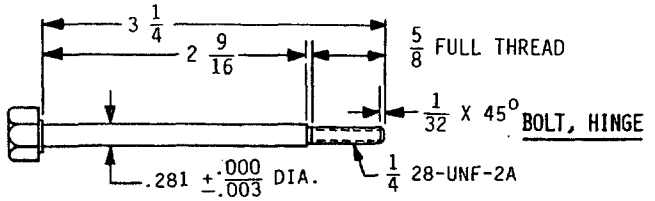



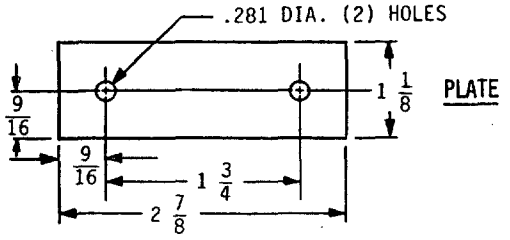

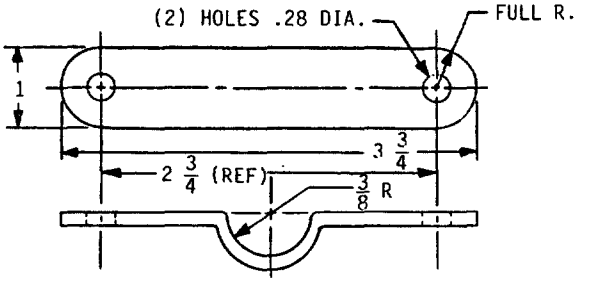

HANGER (ALTERNATE)

REQUIREMENTS:

1. MATERIALS:

(D) A. TUBING FOR BRACKET ASSEMBLY: STEEL, CARBON, SEAMLESS, ANNEALED OR WELDED, .750 O.D. X .065 MIN WALL, ASTM A512, A513, OR A519.

B. BOLT: STEEL, CARBON, FF-B-575, TYPE II, GRADE 5.

C. REMAINING PARTS: STEEL, CARBON, STRIP, H.R., P. & O., OR C.R., 1009-1020, .125 THICK, QQ-S-698 TEMPER OPTIONAL.

2. PROTECTIVE FINISH:

(D) A. BOLT: ZINC PLATE, ASTM B633.

(D) B. ALL OTHER PARTS AND EXPOSED SURFACES: PREPARATION TREATMENT, TT-C-490, TYPE I OR III: PRIME, TT-P-664, MIL-P-53030; ENAMEL, OLIVE DRAB OR BLACK, AS SPECIFIED IN CONTRACT, TT-E-529 OR TT-E-485.

3. BRACKET ASSEMBLY SHALL BE WELDED IN ACCORDANCE WITH MIL-STD-1261, CLASS 1 OR MIL-W-12332.

4. REMOVE ALL BURRS AND SHARP EDGES.

5. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

6. DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED. TOLERANCES ARE ± 1/32 ON FRACTIONS, ± .01 ON DECIMALS, AND ± 1° ON ANGLES.

7. MARKING SHALL CONSIST OF THE MS PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.

3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE ON INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

PREPARING ACTIVITY: ARMY-AT
CUSTODIANS: ARMY- AT NAVY-
AIR FORCE- 99 DLA-
REVIEW: CS
USER: ME MC
PROJECT NUMBER: 2540-A027

MILITARY SPECIFICATION SHEET
TITLE:
MIRROR AND BRACKET ASSEMBLY, REARVIEW

SPECIFICATION SHEET NUMBER:
MS53016D
4 NOVEMBER 1991
SUPERSEDING: MS53016C
26MARCH 1979
AMSC-NA FSC-2540

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: NONE

Source: https://assist.dla.mil - Downloaded: 2020-10-23T20:20Z
Check the source to verify that this is the current version before use.