FED. SUP CLASS
4720

CONFIGURATION AND MATERIAL CORROSION RESISTANT STEEL (450°F)		FITTING ENDS (MIL-F 27272)		(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) IN. VS. HOSE DASH SIZE NO.					
1	2	1	2	-8C	-10C	-12C	-16C	-20C	-24C
 STYLE A		MS27054	MS27054	2,46	2,84	2,76	3,22	3,38	3,62
 STYLE B		MS27054	MS27056	2,48	2,84	3,28	3,59	3,91	4,31
 STYLE C		MS27054	MS27058	2,44	2,83	3,30	3,66	4,03	4,49
 STYLE D		MS27056	MS27056	2,50	2,84	3,80	3,96	4,44	5,00
 STYLE E		MS27056	MS27058	2,46	2,83	3,82	4,03	4,56	5,18
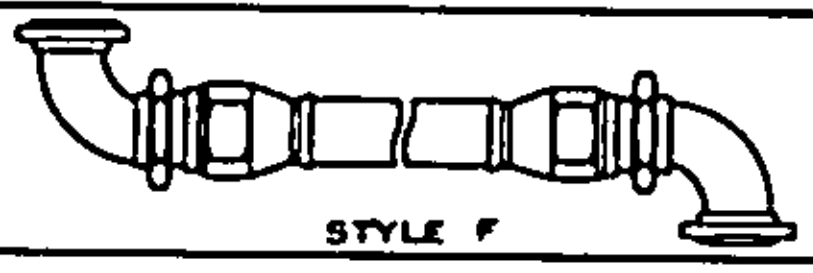 STYLE F		MS27058	MS27058	2,42	2,82	3,84	4,10	4,68	5,36

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -10, 5/8 TUBE OD, 23-1/2 ASSEMBLY LENGTH, STYLE F,
THE BULK HOSE LENGTH = 23.50 - THE HCOF = 23.50 - 2.82 = 20.68.
BULK HOSE LENGTH REQUIRED IS 20.68 INCHES.

FITTINGS TO MATE WITH THE MOUNTING PAD AS SHOWN ON MS33786.

Ⓒ ENTIRE STANDARD REVISED.

APPROVED 28 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Review Activities: Army - CL
Navy -
Air Force -
DLA - CS

User Activities: Army - AR, MI
Navy - SH
Air Force -
DLA -

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MILITARY STANDARD MS 8004C
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES: ---	SHEET 1 of 4 FSC 4720

Project No. 4720-0535

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
4720

CONFIGURATION AND MATERIAL COMBINATION 275°F ALUMINUM AND CORROSION RESISTANT STEEL	FITTING ENDS (MIL-F-27272)		(MIL-H-27267) HOSE CUT OFF FACTOR (HCOF) IN. VS. HOSE DASH SIZE NO.					
1 2	1	2	-8	-10	-12	-16	-20	-24
ASSEMBLY LENGTH TYPICAL  STYLE G	MS27054	MS27054	2,46	2,84	2,76	3,22	3,38	3,62
 STYLE H	MS27054	MS27056	2,48	2,84	3,28	3,59	3,81	4,31
 STYLE J	MS27054	MS27058	2,44	2,83	3,30	3,66	4,03	4,49
 STYLE K	MS27056	MS27056	2,50	2,84	3,80	3,96	4,44	5,00
 STYLE M	MS27056	MS27058	2,46	2,83	3,82	4,03	4,36	5,18
 STYLE N	MS27058	MS27058	2,42	2,82	3,84	4,10	4,68	5,36

User Activities:
Army - AR, MI
Navy - SH
Air Force -
DLA -

Review Activities:
Army - GL
Navy -
Air Force -
DLA - CS

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -10, 5/8 TUBE OD, 23-1/2 ASSEMBLY LENGTH, STYLE ,
THE BULK HOSE LENGTH = 23.50 - THE HCOF = 23.50 - 2.82 = 20.68.
BULK HOSE LENGTH REQUIRED IS 20.68 INCHES.

FITTINGS TO MATE WITH THE MOUNTING PAD AS SHOWN ON MS33786.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 28 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MILITARY STANDARD MS 8004
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDED:	SHEET 2 of 4 FSC 4720

Project No. 4720-0535

FED. SUP CLASS
4720

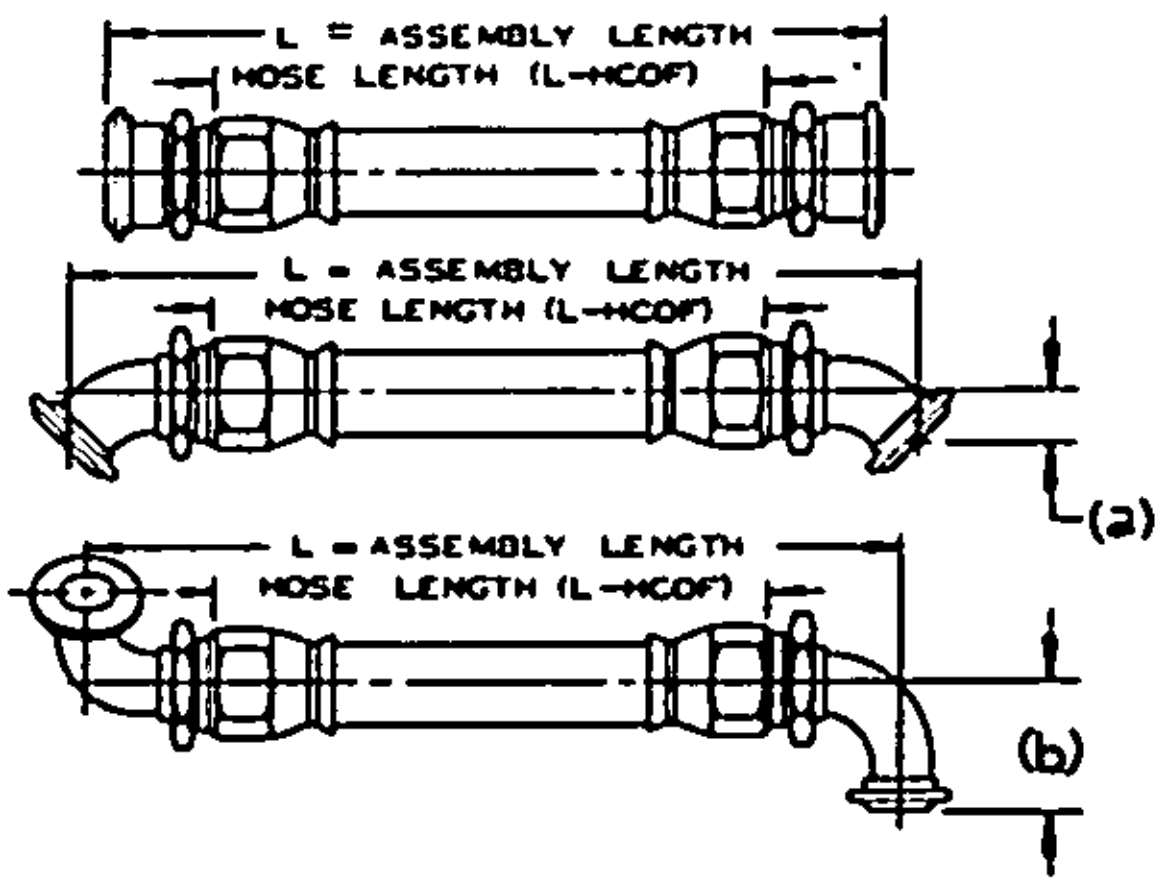

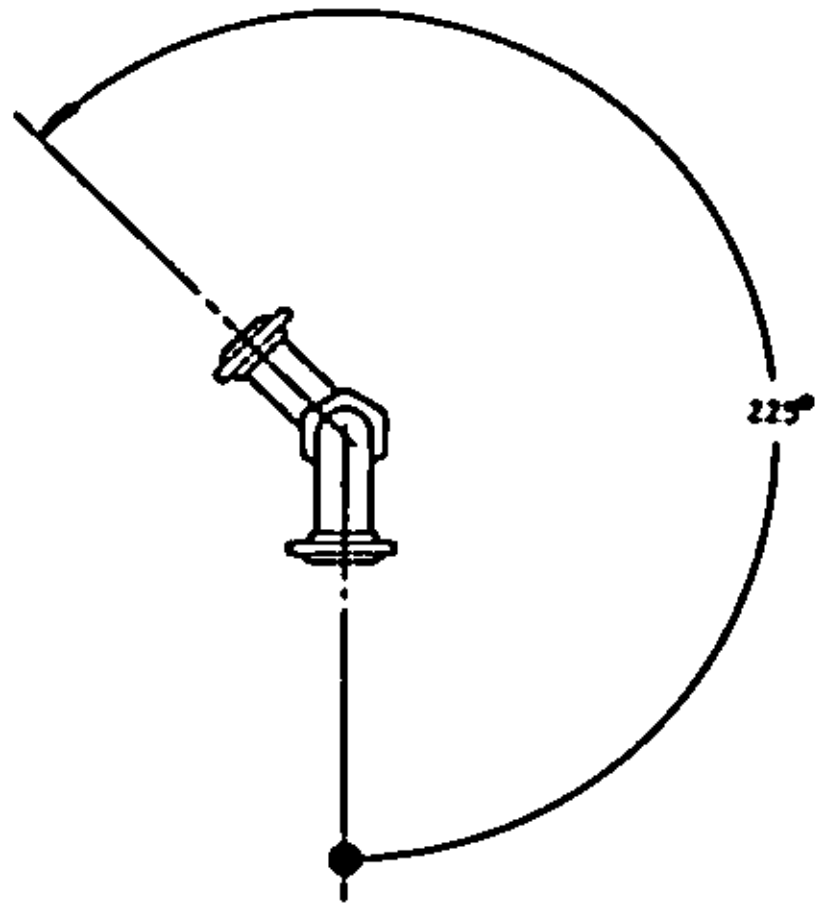

EXAMPLE OF ANGULAR ALIGNMENT OF END FITTING

DASH NO.	TUBING O.D. REF	SIZE	DROP HEIGHT OF ELBOW FITTING	
			(a)	(b)
-8	1/2	H	.458	.927
-10	5/8	J	.410	.931
-12	3/4	K	.503	1.191
-16	1	M	.540	1.317
-20	1-1/4	N	.605	1.535
-24	1-1/2	P	.659	1.723

ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLANE PERPENDICULAR TO THE HOSE AXIS SHALL BE SPECIFIED SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHEST FITTING SHOULD BE ROTATED COUNTERCLOCKWISE. TOLERANCE FOR ANGULAR ALIGNMENT ± 2°.

LENGTH "L" TO BE MEASURED BETWEEN CENTERS OF FLANGE SEALING SURFACES ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH INCREMENTS. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH INCREMENTS. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH INCREMENTS.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE, AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLES OF PART NO.

MS8004H180F*030
HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 18 INCHES IN LENGTH, 30° BETWEEN ELBOWS
ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)
* CODE LETTER SEE BELOW
STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 AND 2)
LENGTH IN EIGHTS (1/8) OF AN INCH
LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES USE 09, 08, 07, ETC.)
SIZE H - -8 OR 1/2 INCH TUBE O.D.

MS8004J092B*
HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH
* CODE LETTER SEE BELOW
STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 AND 2)
LENGTH IN EIGHTS (1/8) OF AN INCH
LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, ETC.)
SIZE J - -10 OR 5/8 INCH TUBE O.D.

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

USER ACTIVITIES: Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1983

P.A. AIR FORCE-11 Other Cust ARMY - AT NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MILITARY STANDARD MS 8004
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 3 of 4 FSC 4720

DD FORM 1 OCT 71 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0533

FED. SUP CLASS
4720

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.

"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).

"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.

"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.

"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.

"L" LOCKWIRE HOLE
"F" CODE A + L
"G" CODE B + L
"H" CODE C + L
"J" CODE D + L
"K" CODE E + L

NOTES:

1. IN COMBINATION CRES AND ALUMINUM FITTINGS, THE SOCKET, SLEEVE AND RETAINER WIRE ARE CORROSION RESISTING STEEL. THE OTHER PARTS ARE ALUMINUM.
2. DIMENSIONS IN INCHES.
3. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. FOR DETAIL DESIGN AND SIZE OF END FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE MS DRAWING.
6. FOR "IDENTIFICAITON OF PRODUCT," SEE PROCUREMENT SPECIFICATION.
7. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

USER ACTIVITIES: Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES: Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 FEB 67 REVISED Ⓐ 16 AUG 71 Ⓑ 15 DEC 76 Ⓒ 30 June 1985

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MILITARY STANDARD **MS 8004**
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 4 OF 4 FSC 4720

DD FORM 1 MAY 75 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0535