MIL-G-36565A
28 March 1975
SUPERSEDING
MIL-G-36565
14 August 1968

MILITARY SPECIFICATION

GOWNS, OPERATING, SURGICAL, COTTON, VEST-TYPE, GREEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type and three sizes of a green, vest-type, cotton, surgical, operating gown.

1.2 Classification. The gowns shall be furnished in the following sizes, as specified (see 6.2):

SIZES

Medium	Large	Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
CCC-C-444	Cloth, Jean, Cotton
DDD-L-20	Label; For Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-636	Boxes, Shipping, Fiberboard

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-TEST METHOD STD NO. 191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Color Association of the United States, Incorporated

TCA Cable Numbers and Colors

(Application for TCA Cable numbers and colors should be addressed to the Color Association of the United States, Incorporated, 200 Madison Avenue, New York, NY 10016.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards as listed or required herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.1.1 Fabric.

3.1.1.1 Gown. The inner and outershells of the gowns shall be fabricated from the cotton jean cloth conforming to CCC-C-444, Class 2, dyed to approximately match Grayish Green 180, except for the following:

a. The ph value of the water extract of the finished fabric shall be 5.0 to 9.0.

b. The dyed and finished fabric shall show at least "fair" colorfastness to light when exposed for 40 standard hours.

3.1.2 Thread. All the sewing operations shall be performed with the cotton thread conforming to V-T-276, Type 1A3 or 1B3, Ticket Number 50, 3 ply. The color of the thread shall approximately match the color of the gown fabric, 3.1.1.1. The thread shall show "good" colorfastness to light, laundering and perspiration when inspected as specified in V-T-276.

3.1.3 Tie tapes. The tie tapes for closing the front opening shall be fabricated from the cotton tape conforming to DDD-T-86, Type I, Class 3, 5/8 inch wide. The color of the tape shall approximately match the color of the gown fabric, 3.1.1.1. The dyed tape shall show at least "fair" colorfastness to light after 40 standard hours, "good" colorfastness to laundering (5 cycles) and no more crocking than Munsell value 8.5 when inspected as specified in DDD-T-86.

3.2 Design. The gown shall be a vest style, collarless with a "V" neckline, sleeveless and consist of an inner and outershell. The gown shall have a front opening closed by three sets of the tie tapes. The operating gown shall conform in appearance to Figure 1.

3.3 Construction.

3.3.1 Cutting. The gown shall be cut in strict accordance with the patterns furnished by the Government (see 6.4), which provide for seam allowance, directional lines for cutting and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay. Unless otherwise specified in Table I, the seam allowance shall be 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.3.2 Shade and size marking. All the component parts of the gowns shall be marked or ticketed by any commercial method to insure a uniform shade and proper assembly throughout the gown. No metal fastening device or sewn-on ticket shall be used. The shade and size markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside of the gown and are not deleterious to the cloth. The markings, which are placed on the seam allowance shall not be visible on the outerside. The adhesive type shade and size marking tickets may be used for the shade and size markings, provided they conform to 3.3.2.1. The assembled gown shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

3.3.2.1 Adhesive shade and size marking tickets. The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermoactivated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

3.3.3 Replacement of defective components and cut parts. Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any fabric or tape defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the gowns shall conform to Table I. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table I. The gage of stitching for all the double-stitched seams shall be 3/16 to 1/4 inch. The outer row of the stitching shall be 1/16 to 1/8 inch from the seam edge. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the gown shall be caught in an unrelated operation or seam. All the seam edges shall be properly forced out and shall not contain any folds. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the interior or exterior of the gown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.3.4.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for the double rows of stitches. Unless otherwise specified, the ends of Stitch Type 301 stitching that are not caught in other seams or stitching shall be back-stitched, by overlapping on themselves, a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements. The gowns shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the gowns are permissible, provided the thread does not show on the surface of the assembled gown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Hem the tie tapes (one end)					
	a. Turn under one end of the tape with the raw edges turned under for 1/2 ± 1/16 inch and stitch or bartack to the tape. The length of the bartack shall be 1/2 ± 1/16 inch.	301 or Bartack	EFb-1	10 to 14 28 per Bartack	50/3 50/3	50/3 50/3
2.	Attach the label					
	a. Position the identification label on the inner shell of the gown on the center of the back, within 1/2 inch, approximately one inch from the top of the assembled garment. Attach the label on all four sides. The printing on the label shall face the wearer and the stitching shall not appear through the outershell of the gown. When a heat attachable label is utilized, it may be attached with heat.	301	LSbj-1	10 to 14	50/3	50/3
3.	Join the front to the back at the shoulders					
	a. Join the fronts and backs of the inner at outershells at the shoulders with the fabric face to face. The shoulder seam of the outershell shall be folded toward the back of the garment. The shoulder seam of the innershell shall be folded toward the front of the garment.	301	SSa-1	10 to 14	50/3	50/3
4.	Join the inner and outershells					
	a. With the shoulder seams joined place the two shells of the gown face to face and join together the neck openings and the fronts catching the end with the raw edges of the tie tapes (see operations 1 and 8) on the left and right fronts in the positions specified by the patterns.	301	SSa-1	10 to 14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
4.	Join the inner and outershells (cont'd)					
	b. With the two shells face to face, join the shells together at the armholes. Place a tack at both ends of the seam.	301	SSa-1	10 to 14	50/3	50/3
5.	Close the side seams					
	a. Turn the face side of the garment out and with the inner and outershells face to face close the side seams	301	SSa-1	10 to 14	50/3	50/3
6	Close the bottom of the gown					
	a. Turn the garment so that the inner and outershells are face to face Close the bottom of the garment leaving an opening at the center of the back of sufficient size to turn the garment The side seam allowance on the outershell shall be folded toward the front of the garment and the side seam allowance of the innershell shall be folded toward the back of the garment.	301	SSa-1	10 to 14	50/3	50/3
	b Trim the excess material at the bottom front corners, prior to turning, so as to minimize the bulk					
7	Double stitch all edges					
	a. Turn the garment and force out the edges Starting at the bottom of the center of the back, with the raw edges turned in, double stitch around the garment ending at the center back and overlapping the starting and ending of the stitching not less than one inch	301	SSe-3(b)	10 to 14	50/3	50/3
	b Starting at the base of the armholes, double stitch around the armholes overlapping the starting and ending of the stitching not less than 1/2 inch.	301	SSe-3(b)	10 to 14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
8.	Bartack the tie tapes					
	a. On the left front, bartack the tie tapes 1/16 to 1/8 inch from the edge. On the right front, fold back the tie tapes over the outer front and bartack 1 ± 1/16 inch from the edge. The length of each bartack shall be 1/2 ± 1/16 inch.	Bartack		28 per bartack	50/3	50/3
	b. The free length of each tie tape shall be 9 ± 1/2 inches.					
9.	Trim all thread ends and remove all thread scraps and foreign matter.					
10.	Each gown shall be folded without creating any wrinkles or creases.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The gowns after assembly shall conform to the dimensions or the different sizes specified in Table II when measured as specified in .3.4.

TABLE II
GOWN DIMENSIONS IN INCHES

ocation	Size			Tolerance
	Medium	Large	Extra Large	
iest	26	28	30	± 1/2
ack ength	39	39-1/2	40	± 1/2

3.5 Label. The identification label for each gown shall conform to DDD-L-20, ype I, Class 1, Launderable Label, except that the color of the label shall e one of the following colors for the appropriate gown size:

COLOR	TCA CABLE NUMBER	GOWN SIZE
Lemon Yellow	70205	Medium
Indian Orange	70072	Large
Primitive Green	70167	Extra Large

hen inspected as specified in 4.3.1.2, the color of the label shall pproximately match the crepe side of the applicable TCA Cable Number. The olor of the label shall be obtained with vat or naphthol dyes and shall how at least "good" colorfastness to laundering transference and at least fair" colorfastness to accelerated laundering. The color of the printing edium shall be black. The label shall be a heat attachable or a sew-on ype. When heat attachable labels are used, the back of the label shall ontain a thermoplastic compound suitable for being attached to the gown y heat. When adhered to the gown, the label shall remain completely adhered ithout any evidence of separation when inspected as specified in 4.3.1.1. he size of the label shall be adequate to contain the following information:

GOWN, OPERATING, SURGICAL, COTTON,
VEST-TYPE
MIL-G-36565A
SIZE
CONTRACT OR ORDER NUMBER
NSN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.5.1 Alternate. An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5. The printi medium and printing shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The color and colorfastness of the label shall be as specified in 3.5. The label shall contain the same information as specified in 3.5.

3.6 Workmanship. The gowns shall not contain any spot, stain, hole, abraded area, tear, cut, mend patch, scorch, or needle chew. The gowns shall conform to the quality of grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified, or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with Table III, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of physical and chemical properties) of the item.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Labels An inspection lot size shall be expressed in units of one label and shall consist of all the labels received by the gown manufacturer at one time. The sample unit for inspection shall be one label.

4.2.1.1.2 Alternate identification label fabric. An inspection lot size shall be expressed in units of one linear yard of the alternate identification label fabric and shall consist of all the alternate identification label fabric received by the gown manufacturer at one time. The sample unit for inspection shall be one linear yard of the alternate identification label fabric.

4.2.1.1.3 Gowns. An inspection lot size shall be expressed in units of one gown made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one gown.

4.2.1.1.4 Preparation of delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing gowns of one size, fully prepared for delivery from essentially the same materials and components. The sample unit for inspection shall be one shipping container, containing gowns of one size, fully prepared for delivery with the exception that it need not be sealed.

4.2.1.2 Sampling for tests and examinations of the labels, alternate identification label fabric, gowns and preparation for delivery. The sample size, acceptance criteria, tests and examinations required for the labels, alternate identification label fabirc, gowns or the preparation for delivery, as applicable, shall be as specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE III
SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS
OF THE LABELS, ALTERNATE IDENTIFICATION LABEL FABRIC,
GOWNS AND PREPARATION FOR DELIVERY

Item	Inspection	Paragraph		Sample Size	Acceptance Criteria	
		Requirement	Method			
Labels 1/	Adherence 5/	3 5	4 3 1.1	2/	2/	4/
	Color Comparison 6/	3.5	4.3.1.2	2/	2/	4/
Alternate Identification Label Fabric 1/	Cotton Identification	3.5.1	4.3.2	3/	3/	4/
	Weight	3.5.1	4.3.2	3/	3/	4/
	Kind of Fabric	3.5.1	4.3.2.1	3/	3/	4/
Gowns	Visual Examination	3 2 through 3.3.5 and 3.5 through 3 6	4.3 3.1	Inspection Level II	An acceptable quality level of 2 5 defects per 100 units for Major defects and 10.0 defects per 100 units for total (Major plus Minor) defects	
	Dimensional Check	3.4	4 3.3.1	Inspection Level S-3	An acceptable quality level of 4.0 defects per 100 units	
	Preparation for Delivery	Section 5	4.3.3.2	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units	

1/ The inspection of the labels and the alternate identification label fabric, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

2/ The sampling for the testing of the labels shall be in accordance with 4.2.1.1.1 and as follows:

Lot Size (Number of labels)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more of the sample units fail to meet the adherence or color comparison requirement, as applicable.

3/ The sampling for the testing of the alternate identification label fabric shall be in accordance with 4.2.1.1.2 and as follows:

Lot Size (Yards)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in Table III. Each sample unit taken for inspection shall be used to determine all the characteristics of the alternate identification label fabric specified in Table III.

4/ A certificate of quality shall be submitted and will be acceptable for the stated requirement (see 4.1.2).

5/ This inspection is only applicable to the labels with thermoplastic backing.

6/ This inspection is applicable to all the kinds of labels.

4.3 Inspection methods.

4.3.1 Labels. The adherence characteristic of the labels with thermoplastic backing and the color matching applicable to all the kinds of labels shall be determined in accordance with 4.3.1.1 and 4.3.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

4.3.1.1 Adherence. The label with thermoplastic backing shall be attached to the gown fabric with heat in accordance with the instruction of the manufacturer of the label with thermoplastic backing. The attached label shall then be laundered for eight consecutive times in accordance with FED-TEST METHO STD No. 191, Method 5605. Upon completion of the eighth laundering, the label shall be examined for any evidence of separation from the fabric (see 3.5).

4.3.1.2 Color matching. The color of the labels shall be compared to the crepe side of the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.3.2 Alternate identification label fabric. The characteristics of the alternate identification label fabric shall be determined in accordance with the inspection methods of FED-TEST METHOD-STD No. 191 specified in Table IV and 4.3.2.1.

TABLE IV
ALTERNATE IDENTIFICATION LABEL FABRIC PROPERTIES

Characteristic	FED-STD-191 Method
Cotton Identification	1200
Weight	5041

4.3.2.1 Kind of alternate identification label fabric. The kind of fabric used for the alternate identification label shall be determined by any standard commercial method.

4.3.3 Visual examination.

4.3.3.1 Gowns. Each gown selected in accordance with Table III as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and lists of defects, Tables V and VI, as applicable, shall be used to classify and enumerate the defects found.

TABLE V
CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION
OF THE ASSEMBLED GOWNS

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole, scissors or knife cut, tear, mend, burn, or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
NERAL (cont'd)		
Any portion of the gown stiffened or scorched by any process of manufacturing	X	
Any missing or broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the gown	1/	
ADED PARTS		
Any part shaded or any shade bar		X
Color of any component not as specified or not uniform		X
EANNESS		
Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed		X
Any unsightly slub, spot, or stain; any discoloration of the cloth caused by the removal of any shade and size marking ticket; any shade and size marking ticket, excluding the metal fastening or sewn-on kind, not removed; any shade and size marking identification stamping visible on the outerside of the gown; or any shade and size marking adhesive mass adhering to the fabric		X
Any metal fastening device or sewn-on shade and size marking ticket attached to the gown	X	
Any marking used for locating the position for attaching of any component visible on the top or underside of the gown		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly, not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c. Any dimension not as specified, not herein classified	1/	
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Any seam or attachment of any component twisted, puckered, or pleated; any part of the gown or of any component caught in an unrelated operation or stitching, any seam edge not properly forced out or contains any fold		X
2. Ends of stitching that are not caught in other seams or stitching:		
(a) Any not securely backstitched	X	
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X
3. Thread breaks:		
(a) Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Cont'd)		
Gage of stitching 2/:		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
Open seams 3/:		
1. Any more than 1/8 inch but not more than 1/4 inch		X
2. Any more than 1/4 inch	X	
Raw edges 4/:		
1. Outerside or innerside of the gown:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
Seam and stitch type:		
1. Not specified seam or stitch	1/	
Stitch tension:		
1. Any loose stitching 5/	1/	
2. Any tight stitching, resulting in breakage of the stitches, when normal pull is applied 6/	X	
Stitches per inch 7/:		
1. Stitches more or less than specified:		
(a) Gown (excluding the label):		
(1) One or 2		X
(2) More than 2	X	
(b) Label:		
(1) One to 3		X
(2) More than 3	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE V (cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (Cont'd)		
h. Bartacks:		
1. Any missing, loose, misplaced, or not serving the intended purpose	X	
2. Length of any not as specified	1/	
3. Any not located as specified	1/	
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE GOWN		
SHOULDER SEAMS		
a. Any not folded in specified direction		X
TIE TAPES		
a. One or more omitted	X	
b. Any less than 8-1/2 inches or more than 9-1/2 inches		X
c. Any free end not hemmed		X
d. Any not attached as specified	1/	
LABELS		
a. Identification:		
1. Size missing, incorrect, or illegible or color of any label not as specified	X	
2. Other than the size information, incomplete, incorrect, or illegible		X
3. Misplaced, off center of the back by more than 1/2 inch		X
4. Stitching omitted on one or more edges		X
5. Attaching stitching visible on the back outerside of the gown		X
6. When applicable, any evidence of separation of any heat attached label		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ The gage of stitching defect shall be scored only when the condition exists for more than 2 inches on any row of stitching.

3/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

4/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified and scored as a raw edge. Any raw edge, that is not securely caught in the stitching, shall be classified and scored as an open seam.

5/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

6/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as an accuracy of seaming defect.

7/ The stitches per inch shall be scored only when the condition exists for more than 3 inches on any row of stitching.

TABLE VI
LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED GOWNS

ASSEMBLED MEASUREMENT	DEFECT
Measure the chest and back length	Any measurement deviating from the measurements specified in 3.4 and Table II and applicable tolerance shall be enumerated as a dimensional defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

4.3.3.2 Preparation for delivery. Each of the fully prepared shipping containers, containing gowns of one size, selected in accordance with Table III as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table VII, shall be used to enumerate the defects.

TABLE VII
LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; improper size, location, sequence, or method of application not as specified size shown on any exterior container or on the label of the gown not the same.
Materials	Any non-conforming component; any component or component part missing, damage, or otherwise defective
Workmanship	Inadequate application of the components such as incomplete closure of any exterior container, container flap, or loose strapping, bulging or distortion of any container; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam
Exterior and interior weight or content	Gross or net weight exceeds the requirement, number per container more or less than specified; more than one size gown in the same container, any portion of the gown caught in any heat sealed seam, any gown distorted, deformed, or bent, any not individually packaged within the polyethylene bag.

4.3.4 Procedure for measuring. The gown to be measured shall be laid flat, without tension, on a smooth, flat surface so that any wrinkles or creases shall not affect the measurement. The measurements shall be made with the use of a yard stick, metal tape, or by use of any suitable measuring device The measurements shall be made as follows

a. The chest dimension shall be taken at the base of the armholes from side folded edge to side folded edge. The front edges of the opening shall be abutting

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

b. The back length dimension shall be taken from the top edge of the neck at the center of the back to the bottom of the gown.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. Each gown of the size specified, constitutes one unit of issue.

5.1.2 Level A.

5.1.2.1 Unit package. Each gown shall be clean and neatly folded to an approximate dimension of 14 inches in length and 12 inches in width. The size label shall be clearly visible in front to permit ready identification. Each folded gown shall be inserted in a snug fitting, clear polyethylene bag having a minimum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape.

5.1.2.2 Intermediate package. Twelve unit packages of one size only shall be packaged in a snug fitting box constructed in accordance with PPP-B-636, type CF, class domestic. Closure of the box shall be effected by gluing or taping.

5.1.3 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four intermediate packages (48 units) containing gowns of one size only shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, class weather-resistant, grade V3c or V3s. Closure, waterproofing and strapping shall be as specified in the box specification.

5.2.2 Level B. Four intermediate packages (48 units) containing gowns of one size only shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, type CF, class domestic and having a minimum bursting strength of 200 pounds. Closure shall conform to method II as specified in the box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

5.3 Ma

5.3.1 I shall be marked in accordance with MIL-STD-12 mber, size, and name of contractor shall be sh the manufacturer, the name of the manufacing shall be printed directly on the bag ie bag in such a manner to permit ready ident

5.3.2 Immediate package shall be marked in accordars are utilized, waterproofing shall be requirec fabricated of water-resistant material. r and name of contractor shall be shown.

5.3.3 Btainer shall be marked in accordance with MIL-ST

5.3.4 Ing container packed with mixed sizes shall nd and side, directly under the printing or 5 by 4 inches with the words "MIXED SIZE hereon and under these words shall be legibly uantity and sizes contained therein.

6. NOTI

6.1 Int. cotton, surgical, operating gowns covered by for wear in the operating room during orth res to provide the surgeon with a sterile g

6.2 Ordts shall specify the following:

a. specification.
b.
c. of packaging and packing

6.3 Patn shall be furnished by the contracting ofin cutting working patterns (see 3.3.1). The patternowing:

NO	CUT PARTS
Fr	4
Ba	2
Ti	6

ipping
1 Table III
ie that
The list

iete, or
ocation,
ication not
1 any exterior
of the gown

it, any
t missing,
ive.

he components
of any exterior
or loose
rtion of any
bag damaged,
ny open or
seam

the requirement.
r less than
ze gown in the
of the gown
eam, any gown
t, any not
n the

laic flat
eases shall
use of a
The measure-

from side
l be abutting

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

6.4 Catalog information. This specification is intended to cover the lowing items appearing in the Federal Supply Catalog:


NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-935-0972	GOWN, OPERATING, SURGICAL, Cotton, Vest-type, Green, Size Medium, Each
6532-00-935-0973	GOWN, OPERATING, SURGICAL, Cotton, Vest-type, Green, Size Large, Each
6532-00-935-0974	GOWN, OPERATING, SURGICAL, Cotton, Vest-type, Green, Size Extra Large, Each

todians:
Army - MD
Navy - MS
Air Force - 03


Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1093

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

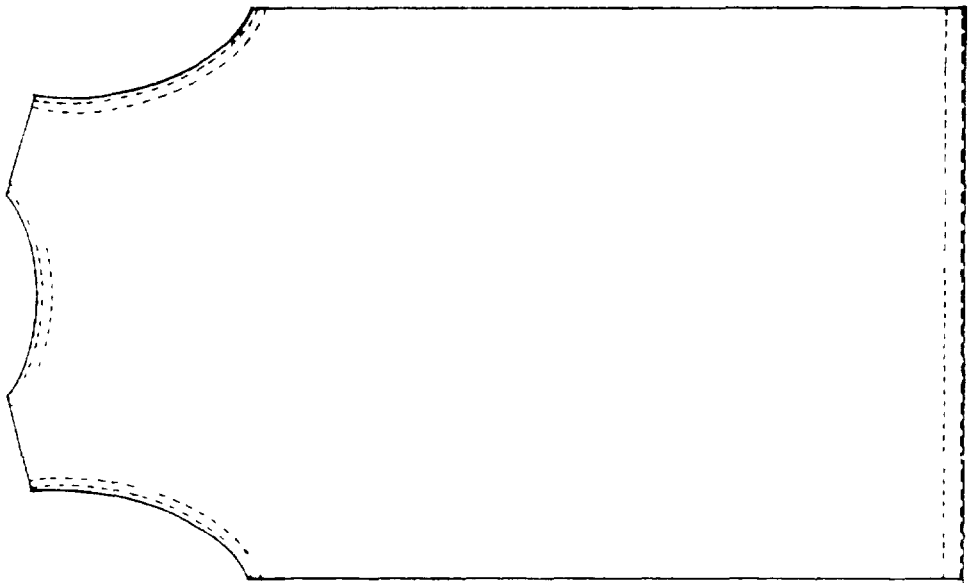

BACK

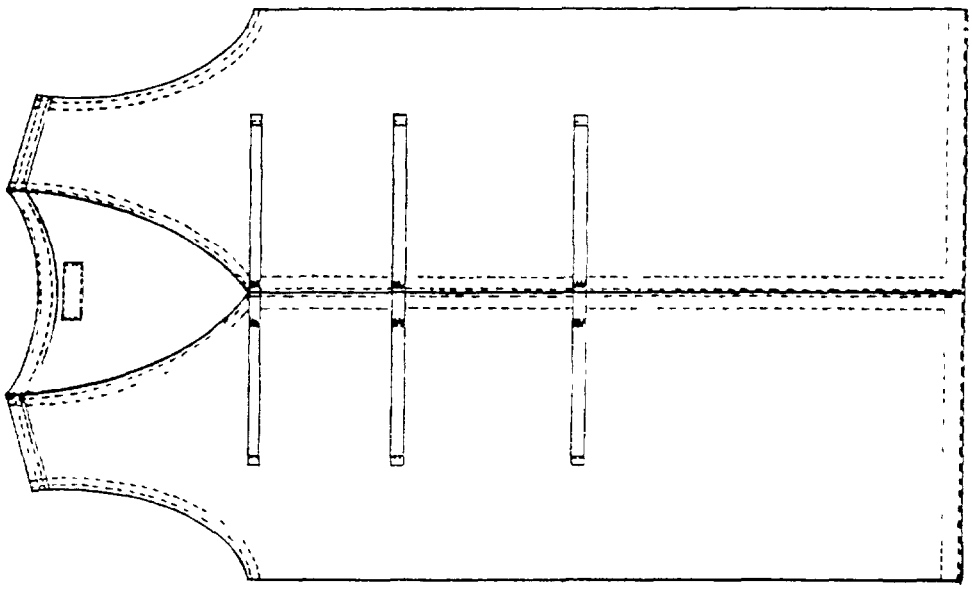

FRONT

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-G-36565A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.