MIL-G-36566A
2 June 1975

SUPERSEDING
MIL-G-36566
10 January 1969

MILITARY SPECIFICATION

GOWN, OPERATING, SURGICAL, COTTON, PLEATED FRONT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type, two classes (colors) and four sizes of a surgical, operating gown.

1.2 Classification. The gowns shall be furnished in the following classes (colors) and sizes, as specified (see 6.2):

1.2.1 Classes. The gowns shall be furnished in the following classes (colors), as specified (see 6.2):

Class 1 - Bleached white
Class 2 - Grayish green 180

1.2.2 Sizes. The gowns shall be furnished in the following sizes, as specified (see 6.2):

SIZES			
Small	Medium	Large	Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

V-T-276	Thread, Cotton
UU-P-268	Stockinet, Surgical
CCC-C-444	Cloth, Jean, Cotton
DDD-L-20	Label, For Clothing, Equipage, and Tentage, (General Use)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

Federal

DDD-T-86	Tape, Textile; Cotton; General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-B-676	Box, Setup

STANDARDS

Federal

FED-TEST METHOD STD. NO. 191	Textile Test Methods
FED-STD-751	Stitches, Seams, and Stitchings

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Color Association of the United States, Incorporated

TCA Cable Numbers and Colors

(Application for TCA Cable Numbers and Colors should be addressed to the Color Association of the United States, Incorporated, 200 Madison Avenue, New York, NY 10016.).

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials and components. The materials and components shall conform to the applicable specifications and standards listed or required herein.

3.1.1 Fabric.

3.1.1.1 Gowns. The gowns shall be fabricated from cotton jean cloth conforming to CCC-C-444, Class 1 for bleached white and Class 2 dyed to approximately match Grayish Green 180, as applicable, except for the following:

a. The pH value of the water extract of the finished fabric shall be 5.0 to 9.0.

b. The dyed and finished fabric shall show at least "fair" colorfastness to light when exposed for 40 standard hours.

3.1.1.2 Belt, collar, necktab, reinforcement patch and sleeves. The belt, collar, necktab, reinforcement patch and sleeves shall be fabricated from the gown fabric, 3.1.1.1, and shall be the same color as the gown.

3.1.2 Thread. All the sewing operations shall be performed with the cotton thread conforming to V-T-276, Type 1A2 or 1B2 for the Class 1 gown and Type 1A3 or 1B3 for the Class 2 gown, Ticket Number 50, 3 ply and Ticket Number 70, 2 ply (see Table I). When Stitch Type 401 is utilized, Ticket Number 50, 3 ply may be used for the bobbin or looper thread instead of Ticket Number 70, 2 ply. The color of the dyed thread shall approximately match the color of the dyed gown fabric, 3.1.1.1. The dyed thread shall show "good" colorfastness to light, laundering (3 cycles) and perspiration when inspected as specified in V-T-276. Ticket Number 40, 3 ply thread may be substituted for the Ticket Number 50, 3 ply thread.

3.1.3 Tie tapes. The tie tapes for closing the back opening shall be fabricated from the cotton tape conforming to DDD-T-86, Type I, Class 2 for the Class 1 gown, Class 3 for the Class 2 gown, 5/8 inch wide. The color of the Class 3 tape shall approximately match the color of the dyed gown fabric, 3.1.1.1. The dyed tape shall show at least "fair" colorfastness to light after 40 standard hours, "good" colorfastness to laundering (3 cycles) and no more crocking than Munsell value 8.5 when inspected as specified in DDD-T-86.

3.1.4 Cuffs. The cuffs shall be fabricated from the seamless, tubular stockinet material conforming to JJ-S-746, Type I, 3 inches wide, except for the following:

a. The color of the cuffs for the Class 1 gown shall be bleached white.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

b. The color of the dyed cuffs for the Class 2 gown shall approximately match the color of the gown fabric, 3.1.1.1, when inspected as specified in 4.3.1.1.

c. The dyed stockinet material shall have at least good colorfastness to light, laundering and perspiration when inspected as specified in Table IV.

d. The minimum bursting strength shall be 75 points.

e. A doubled layer shall have a minimum crosswise stretch (width direction) of 5 inches when inspected as specified in 4.3.1.3.

3.2 Design. The gown shall be full length with an open back closed by three sets of tie tapes, a stand up collar, a neck tab reinforcement located at the front neckline, full length sleeves terminating in knitted cuffs, an all around belt, front pleats formed at the waist and held in position by the belt rectangular reinforcement patch. The operating gown shall conform in appearance to Figure 1.

3.3 Construction.

3.3.1 Cutting. The gowns shall be cut in strict accordance with the patterns furnished by the Government (see 6.3), which provide for seam allowance, size, shape, and placement of the reinforcement patches, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts shall be cut from the same ply of the lay. The cuffs shall be cut so that the wales shall be in the length direction. The cuffs shall be a doubled thickness of the stockinet material of sufficient size to finish in a cuff when attached to the sleeve 4-1/2 $\pm$ 1/4 inches.

3.3.2 Shade and size marking. All the component parts of the gown shall be marked or ticketed by any commercial method to insure a uniform shade and proper assembly throughout the gown. No metal fastening device or sewn-on ticket shall be used. The shade and size markings shall be accomplished by the use of an ink pad numbering machine, rubber stamp, or pencil, provided the markings do not show through to the outerside of the gown and are not deleterious to the cloth. The markings, which are placed on the seam allowance, shall not be visible on the outerside. The adhesive type shade and size marking tickets may be used for the shade and size markings, provided they conform to 3.3.2.1. The assembled gown shall not contain any shade or size marking ticket nor any marking that was used for locating the position for attaching of any component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.3.2.1 Adhesive shade and size marking tickets. The adhesive shade and size marking tickets shall be fabricated from paper and shall contain a thermo-activated type adhesive on one side. The adhesive shall not discolor or damage the cloth and the adhesive mass shall not adhere to the cloth, upon removal of the ticket. The heat used to attach the thermoactivated adhesive tickets shall not stiffen, scorch, or damage the cloth in any manner.

3.3.3 Replacement of defective components and cut parts. Care shall be exercised during the spreading, cutting and manufacturing processes to assure that any component and cut part containing any fabric, tie tape or knitted cuff defect or damage that is classified in this specification as a defect shall be replaced with a non-defective and properly matched component or cut part, as applicable.

3.3.4 Seams and stitching. All the seams and stitching used in the fabrication of the gowns shall conform to Table I. The seam and stitch types shall conform to FED-STD-751. When two or more seam or stitch types are specified for the same part of the operation, the contractor may select one of them for the operation. The minimum and maximum number of stitches for each operation shall conform to Table I. When stitch Type 401 is used, the looper thread shall be on the innerside of the garment. The bight of the overedge type stitching shall be of 3/16 to 7/16 inch from the edge of the fabric. The gage of stitching for all the double lapped, double stitched seams shall be 3/16 to 1/4 inch. The outer row of the stitching shall be 1/16 to 1/8 inch from the seam edge. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the gown shall be caught in an unrelated operation or seam. All the seam edges shall be properly forced out and shall not contain any folds. The necktab, collar and reinforcing patch shall be uniform in width, smooth and flat. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the interior or exterior of the gown.

3.3.4.1 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The same tolerance for spacing and parallelism shall be applicable for the double rows of stitches. The ends of Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched, by overlapping on themselves, a minimum of 1/2 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together.

3.3.5 Manufacturing operation requirements. The gowns shall be manufactured in accordance with the operation requirements specified in Table I. The supplier is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate the fabrication of the gowns are permissible, provided the thread does not show on the surface of the assembled gown.

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Hem the tie tapes (one end)					
	a. Turn under one end of the tape with the raw edge turned under for 1/2 ± 1/16 inch and stitch or bartack to the tape. The length of the bartack shall be 1/2 ± 1/16 inch long.	301 or	EFp-1	10 to 14	50/3	50/3
		Bartack		28 per bartack	50/3	50/3
2.	Form the belt					
	a. Fold the belt in half lengthwise and turn in the sides and ends. Stitch the belt together 1/16 to 1/8 inch from the sides and ends completely around the belt.	301	EFp-2 and SSc-1	10 to 14	50/3	50/3
	-OR-					
	b. Fold the belt in half lengthwise and join together, except for an end to permit turning, with one row of stitching approximately 1/4 inch from the edge. Turn the belt and turn in the raw edges of the end left open and top stitch completely around the belt with one row of stitching 1/16 to 1/8 inch from the edge.	301 or	SSe-2(a)	10 to 14	50/3	50/3
		401 and	SSe-2(a)	10 to 14	50/3	70/2
		301	SSe-2(b) and OSf-1 and SSc-1	10 to 14	50/3	50/3
	-OR-					
	c. When the belt is fabricated from two pieces of material, superimpose one upon the other so that all the edges coincide. Stitch together with one row of stitching approximately 1/4 inch from the edge, leaving one end open for turning. Turn the belt and stitch all around the belt with one row of stitching 1/16 to 1/8 inch from the edge.	301 or	SSe-2(a)	10 to 14	50/3	50/3
		401 and	SSe-2(a)	10 to 14	50/3	70/2
		301	SSe-2(b) and SSc-1 and OSf-1	10 to 14	50/3	50/3
	d. The two side rows of stitching may be accomplished on a single or double needle sewing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
3.	Join the sleeve (two piece construction)					
	a. Join the sleeve pieces together at the back arm with a double lapped and double stitched seam. The seam may lap in either direction.	301	LSc-2	10 to 14	50/3	50/3
		or 401	LSc-2	10 to 14	50/3	70/2
4.	Join the fronts (alternate two piece construction)					
	a. Join the two front pieces together with a double lapped, double stitched seam. The seam may lap in either direction.	301	LSc-2	10 to 14	50/3	50/3
		or 401	LSc-2	10 to 14	50/3	50/3
5.	Attach the necktab to the front					
	a. Position the necktab at the top center of the front within 1/4 inch. Fold under the edges at the sides and bottom. Attach the necktab to the front with one row of stitching 1/16 to 1/8 inch from the edge.	301	LSd-1	10 to 14	50/3	50/3
6.	Form the pleats and attach the belt reinforcement patch to the front					
	a. Form the two box pleats at the waist of the fronts for the amount and location indicated by the patterns. Center and place the belt reinforcement patch over the pleats as indicated by the patterns. Fold under the raw edges and attach with one row of stitching, all around the patch, 1/16 to 1/8 inch from the edge. If desired, the pleats may be held in position by a holding stitch.	301	LSd-1	10 to 14	50/3	50/3
7.	Form back opening facings					
	a. Turn the back opening facings under for the amount indicated by the patterns. Turn under the raw edges and attach to the back with one row of stitching 1/16 to 1/8 inch from the edges. The width of each facing shall be 1-7/8 to 2-3/8 inches. The edges need not be turned under when selvaged edges are utilized. However the facing shall be attached to the back with one row of stitching 1/16 to 1/8 inch from the edges.	301	EFb-1	10 to 14	50/3	50/3
		or 301	Efa-1	10 to 14	50/3	50/3.

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
8.	Join the front to the back at the shoulders					
	a. Join the front to the back at the shoulders with a double lapped double stitched seam. The backs shall lap the fronts.	301 or	LSc-2	10 to 14	50/3	50/3
		401	LSc-2	10 to 14	50/3	70/2
9.	Attach sleeves					
	a. Attach each sleeve in its proper armhole, distributing the fullness, with a double lapped double stitched seam. The fronts and backs shall lap the sleeve	301	LSc-2	10 to14	50/3	50/3
		or				
		401	LSc-2	10 to14	50/3	70/2
10.	Close the sides and underarm sleeve seams					
	a. Join together the sides and underarms sleeve seams with a double lapped double stitched seam. The seam may lap in either direction	301	LSc-2	10 to 14	50/3	50/3
		or				
		401	LSc-2	10 to 14	50/3	70/2
11.	Form and attach the collar					
	a. Fold the collar in half lengthwise and attach the ends together, within 1/4 inch from the bottom raw edges, with one row of stitching approximately 1/4 inch from the end cut edges. Turn and work out the edges. The assembled collar shall not contain any folds. The collar shall finish smooth and flat.	301	SSe-2(a)	10 to 14	50/3	50/3
		or				
		401	SSe-2(a)	10 to 14	50/3	70/2
	b. Join the bottom edge of the under collar to the neck of the gown with one row of stitches approximately 1/4 inch from the raw edges and turn up.	301	SSa-(1)	10 to 14	50/3	50/3
		or				
		401	SSa-(1)	10 to 14	50/3	70/2
	c. Fold under the bottom edge of the top collar and attach to the neck of the gown with one row of stitching 1/16 to 1/8 inch from the turned edge. Continue the stitching along the side and the top edge of the collar. The width of the collar shall be 1-1/4 ± 1/8 inches.	301	LSb-1 and SSe-2(b) and OSf-1	10 to 14	50/3	50/3
		301		10 to 14	50/3	50/3
		301		10 to 14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
12.	Form and attach the cuffs					
	a. Fold a double layer of the stockinet material to form a cuff.					
	b. Attach the cuffs to the underside of the sleeve with a 3/8 inch seam allowance. The cuff shall finish 4-1/2 ± 1/4 inches on length.	512 515 516 517 or 519	SSa-2 SSa-2	8 to 12 8 to 12	50/3 50/3 (Chain) and 70/2 (Overedge)	70/2 70/2
13.	Attach the belt					
	a. Center the belt on the reinforcement patch on the front of the gown and attach with one row of stitching the top and the bottom edges of the belt for a distance of 3 ± 1/4 inches from each side of the center of the patch and belt and across the width of the belt forming a rectangle. The row of stitching shall be 1/16 to 1/8 inch from the top and bottom edges of the belt.	301	LSbj-1	10 to14	50/3	50/3
	b. On the inside of this rectangle, at each end, form a box of stitching 1 ± 1/8 inch in width, with each box diagonally stitched from corner to corner. When an automatic crossbox stitching machine is used, the end of the stitching shall overlap on itself a minimum of 3 stitches.	301	LSbj-1	10 to 14	50/3	50/3
	-OR-					
	c. Center the belt on the reinforcement patch on the front of the gown and attach with two rows of stitching, 3/16 to 1/4 inch apart, the top and the bottom edges of the belt for a distance of 3 ± 1/4 inches from each side of the center of the patch and belt across the width of the belt forming a rectangle. The outside row of the stitching shall be 1/16 to 1/8 inch from the top and bottom edges of the belt.	301	SSa-2	10 to 14	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
14.	Hem the bottom of the gown					
	a. Fold under the bottom of the gown with the raw edges turned under to form a hem 1 ± 1/8 inch wide.	301	EFb-1	10 to 14	50/3	50/3
15.	Attach the tie tapes					
	a. Turn under the end with the cut edges, 1/2 ± 1/8 inches, and attach to the gown with 1/2 inch crossbox stitching. The inside of the box or square shall contain continuous diagonally stitching from corner to corner. The free length of each tie tape shall be 12-1/2 ± 1/2 inches. The tapes shall be attached to the gown in the following positions: (1) One centered within 1/4 inch on the inside of the collar 1-1/2 ± 1/8 inches from the attached right end. (2) One centered within 1/4 inch on the outerside of the collar 1-1/2 ± 1/8 inches from the attached left end. (3) Two on the inside of the right back 1-1/2 ± 1/8 inches from the back opening (folded) edge. The tapes shall be located 6 ± 1/4 inches and 12 ± 1/4 inches respectively from the bottom edge of the collar tie tape to the top edges of the tapes attached on the inside of the back. (4) Two on the outerside of the left back 1-1/2 ± 1/8 inches from the back opening (folded) edge shall be located on the same plane as the tie tapes on the right back side (see 15a(3)).	301	LSd-1	10 to 14	50/3	50/3
	b. As an alternate each tie tape may be attached to the gown with two centered vertical bartacks instead of the crossbox stitching. One bartack shall be located 1/16 to 1/8 inch from the folded edge and the other 1/4 to 3/8 inch from the first bartack. The length of each bartack shall be 1/2 ± 1/16 inch.	Bartack		28 per bartack	50/3	50/3

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

Review Activities:

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
16.	Attach the label a. Position the identification label on the innerside of the gown behind the necktab so that the stitching attaching the label are hidden by the necktab. Attach the label on all four sides. NOTE: The top edge of the label may be caught in the collar seam. Attach the remaining three sides. b. When a heat attachable label is utilized, it may be attached with heat.	301	LSbj-1	10 to 14	50/3	50/3
17.	Trim all thread ends and remove all thread scraps and foreign matter.					
18.	Each gown shall be folded to an approximate size of 13-1/2 by 15 inches without creating any wrinkles or creases					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.4 Dimensions. The gowns after assembly shall conform to the dimensions for the different sizes specified in Table II when measured as specified in 4.3.5. The variation in length between the left and right sleeve dimension shall not exceed 1/2 inch in any gown.

TABLE II. GOWN DIMENSIONS IN INCHES

Location	Size Small	Medium	Large	Extra Large	Tolerance
Chest	26	28-1/2	32-1/4	35-3/4	± 1/2
Back Length	47-1/4	50	52-3/4	55	± 1/2
Distance from the center of the belt to the bottom of the collar	14-1/2	15	16-1/2	18	± 1/4
Collar length	18-3/8	19-3/8	20-3/8	21-3/8	± 1/4
Sleeve length	36-1/2	37-1/2	39-7/8	42	± 1/2
Belt length	68	68	68	68	+ 1 - 0

3.5 Label.. The identification label for each gown shall conform to DDD-L-20, Type I, Class 1, Launderable Label, except that the color of the label shall be one of the following colors for the appropriate gown size:

Color	TCA Cable Number	Gown Size
Peach Blossom	70098	Small
Lemon Yellow	70205	Medium
Indian Orange	70072	Large
Primitive Green	70167	Extra Large

When inspected as specified in 4.3.2.2, the color of the label shall approximately match the crepe side of the applicable TCA Cable Number. The color of the label shall be obtained with vat or naphthol dyes and shall show at least "good" colorfastness to laundering transference and at least "fair" colorfastness to accelerated laundering. The color of the printing medium shall be black. The label shall be a heat attachable or a sew-on type. When heat attachable labels are used, the back of the label shall contain a thermoplastic compound suitable for being attached to the gown by heat. When adhered to the gown, the label shall remain completely adhered without any evidence of separation when inspected as specified in 4.3.2.1. The size of the label shall be adequate to contain the following information:

GOWN, OPERATING, SURGICAL, COTTON, PLEATED FRONT
MIL-G-36566A
SIZE
CONTRACT OR ORDER NUMBER
NSN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

3.5.1 Alternate. An alternate identification label fabricated from cotton coutil or poplin cloth having a greige weight of 2.11 yards per pound (45 inch width) may be used in lieu of the label specified in 3.5. The printing medium and printing shall conform to DDD-L-20, Type I, Class 1, Launderable Label. The color and colorfastness of the label shall be as specified in 3.5. The label shall contain the same information as specified in 3.5.

3.6 Caduceus and US markings. When specified (see 6.2), each gown shall be marked on the left or right back facing near the bottom of the gown with a caduceus of appropriate size between the letters "U" and "S", 1/4 inch in height, in accordance with MS16686, Type I. The markings shall conform to DDD-L-20, Type IV, Class 9, except that the markings shall show colorfastness to laundering transference and accelerated laundering as specified for Class 4 marking.

3.7 Workmanship. The gowns shall not contain any spot, stain, hole, abraded area, tear, cut, mend patch, scorch, or needle chew. The gowns shall conform to the quality of grade established by this specification. The occurrence of defects shall not exceed the acceptance criteria established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material and component inspection. In accordance with 4.1, the materials and components shall be inspected and tested in accordance with all the requirements of the referenced specifications and standards, unless otherwise excluded, amended, modified, or qualified in this specification or purchase document.

4.1.2 Certificate of quality. When certificates of quality are submitted in accordance with Table III, they shall contain verifiable actual test and inspection data. The Government reserves the right to inspect and test the components to verify the validity of the certification.

4.1.3 Inspection. Inspection, as used in this specification, is defined as both examination (an investigation without the use of special laboratory apparatus or procedures such as visual) and testing (a determination by technical means of physical and chemical properties) of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

4.2 Quality conformance inspection. The sampling and inspection shall conform to MIL-STD-105, except where otherwise indicated hereinafter. The quality conformance inspection shall consist of the tests and examinations specified in Table III.

4.2.1 Sampling.

4.2.1.1 Inspection lot.

4.2.1.1.1 Stockinet material. An inspection lot size shall be expressed in units of one-half linear yard of the stockinet material and shall consist of all the stockinet material received by the gown manufacturer at one time. The sample unit for inspection shall be one-half linear yard of the stockinet material.

4.2.1.1.2 Labels. An inspection lot size shall be expressed in units of one label and shall consist of all the labels received by the gown manufacturer at one time. The sample unit for inspection shall be one label.

4.2.1.1.3 Alternate identification label fabric. An inspection lot size shall be expressed in units of one linear yard of the alternate identification label fabric and shall consist of all the alternate identification label fabric received by the gown manufacturer at one time. The sample unit for inspection shall be one linear yard of the alternate identification label fabric.

4.2.1.1.4 Gown. An inspection lot size shall be expressed in units of one gown made essentially under the same conditions and from the same materials and components. The sample unit for inspection shall be one gown.

4.2.1.1.5 Preparation of delivery. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing gowns of one size, fully prepared for delivery from essentially the same materials and components. The sample unit for inspection shall be one shipping container, containing gowns of one size, fully prepared for delivery with the exception that it need not be sealed.

4.2.1.2 Sampling for tests and examinations of the stockinet material, labels, alternate identification label fabric, gowns and preparation for delivery. The sample size, acceptance criteria, tests and examinations required for the stockinet material, labels, alternate identification label fabric, gowns or the preparation for delivery, as applicable, shall be as specified in Table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE III

SAMPLE SIZE, ACCEPTANCE CRITERIA, TESTS AND EXAMINATIONS OF THE STOCKINET MATERIAL, LABELS, ALTERNATE IDENTIFICATION LABEL FABRIC, GOWNS AND PREPARATION FOR DELIVERY

Item	Inspection	Paragraph Requirement	Paragraph Method	Sample Size	Acceptance Criteria	
Stockinet material 1/	Color	3.1.4	4.3.1.1	2/	2/	4/
	Colorfastness to:					
	Light	3.1.4	4.3.1.2	2/	2/	4/
	Laundering	3.1.4	4.3.1.2	2/	2/	4/
	Perspiration	3.1.4	4.3.1.2	2/	2/	4/
	Stretch	3.1.4	4.3.1.3	2/	2/	4/
1/ Labels	Adherence 5/	3.5	4.3.2.1	3/	3/	4/
	Color Comparision 6/	3.5	4.3.2.2	3/	3/	4/
Alternate Identification Label Fabric 1/	Cotton Identification	3.5.1	4.3.3	2/	2/	4/
	Weight	3.5.1	4.3.3	2/	2/	4/
	Kind of Fabric	3.5.1	4.3.3.1	2/	2/	4/
Gowns	Visual Examination	3.2 through 3.3.5 and 3.5 through 3.7	4.3.4.1	Inspection Level II	An acceptable quality level of 2.5 defects per 100 units for Major defects and 10.0 defects per 100 units for total (Major plus Minor) defects	
	Dimensional Check	3.4	4.3.4.1	Inspection Level S-3	An acceptable quality level of 4.0 defects per 100 units	
	Preparation for Delivery	Section 5	4.3.4.2	Inspection Level S-2	An acceptable quality level of 2.5 defects per 100 units	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

1/ The inspection of the stockinet material, labels, and the alternate identification label fabric, as applicable, shall be conducted either at the contractor's or subcontractor's plant.

2/ The sampling for the testing of the stockinet material and the alternate identification label fabric shall be in accordance with 4.2.1.1.1 and 4.2.1.1.3 and as follows:

Lot Size (Yards)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The samples shall be taken from the beginning of each roll. The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified in Table III. Each sample unit taken for inspection shall be used to determine all the characteristics of the alternate identification label fabric specified in Table III.

3/ The sampling for the testing of the labels shall be in accordance with 4.2.1.1.2 and as follows:

Lot Size (Number of labels)	Sample Size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more of the sample units fail to meet the adherence or color comparison requirement, as applicable.

4/ A certificate of quality shall be submitted and will be acceptable for the stated requirement (see 4.1.2).

5/ This inspection is only applicable to the labels with thermoplastic backing.

6/ This inspection is applicable to all the kinds of labels.

4.3 Inspection methods

4.3.1 Stockinet material. The color matching and the colorfastness properties of the dyed stockinet material and the stretch of the dyed and undyed stockinet material shall be determined in accordance with 4.3.1.1 through 4.3.1.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

4.3.1.1 Color matching. The color of the dyed stockinet material shall be compared to the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.3.1.2 Colorfastness. The colorfastness properties of the dyed stockinet material shall be determined in accordance with the inspection methods of FED-TEST METHOD STD NO. 191 specified in Table IV.

TABLE IV

COLORFASTNESS PROPERTIES OF THE DYED STOCKINET MATERIAL

CHARACTERISTIC	FED-TEST METHOD STD NO. 191 METHOD
Colorfastness to:	
Light	5660
Laundering (3 cycles)	5610 1/
Perspiration	5680

1/ The staining of the cotton fiber only on the color transfer cloth shall be evaluated. The test specimen shall be dried after each laundering.

4.3.1.3 Stretch. The crosswise stretch of a doubled layer of the dyed or undyed stockinet material, as applicable, shall be determined on a Houchin modification of the Schieffer apparatus described in FED-TEST METHOD STD. NO. 191, Method 7560 and as shown on Figure 2. The modified apparatus differs from the apparatus shown in FED TEST METHOD STD. No. 191, Method 7560 with regard to the shape and size of the separating form. In lieu of the footlike form, a rectangular form 2 by 4 inches shall be used. A doubled thickness of the stockinet material shall be pulled over the form so that the 2 inch edge shall be parallel to the ribs or wales. The indicator pin shall be inserted in the upper 2 inch edge of the separating form and a 10 pound weight slowly applied so as to cause separation of the upper and lower slotted forms with a resultant stretch of the stockinet material under a uniform load over the 2 inch edge. The amount of stretch in the specimen shall be determined after the weight has hung freely for 30 seconds and shall be expressed in inches as the distance between the upper and lower edges of the separated form. The average of 5 determinations, calculated to the nearest 0.1 of an inch, shall be reported as the value for the stretch characteristic.

4.3.2 Labels. The adherence characteristic of the labels with thermoplastic backing and the color matching applicable to all the kinds of labels shall be determined in accordance with 4.3.2.1 and 4.3.2.2.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:49Z
Check the source to verify that this is the currentversion before use.

4.3.2.1 Adherence. The label with thermoplastic backing shall be attached to the gown fabric with heat in accordance with the instructions of the manufacturer of the label with thermoplastic backing. The attached labels shall then be laundered for eight consecutive times in accordance with FED-TEST METHOD STD NO. 191, Method 5605. Upon completion of the eighth laundering, the label shall be examined for any evidence of separation from the fabric (see 3.5).

4.3.2.2 Color matching. The color of the labels shall be compared to the crepe side of the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin.

4.3.3 Alternate identification label fabric. The characteristics of the alternate identification label fabric shall be determined in accordance with the inspection methods of FED-TEST METHOD STD NO. 191 specified in Table V and 4.3.3.1.

TABLE V

ALTERNATE IDENTIFICATION LABEL FABRIC PROPERTIES

Characteristic	FED-STD-191 Method
Cotton Identification	1200
Weight	5041

4.3.3.1 Kind of alternate identification label fabric. The kind of fabric used for the alternate identification label shall be determined by any standard commercial method.

4.3.4 Visual examination.

4.3.4.1 Gown. Each gown selected in accordance with Table III as a sample unit from the lot shall be thoroughly checked dimensionally and examined visually to determine conformance to this specification. The classification and lists of defects, Tables VI and VII, as applicable, shall be used to classify and enumerate the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI

CLASSIFICATION OF DEFECTS FOR THE VISUAL EXAMINATION OF THE ASSEMBLED GOWNS

DEFECT	MAJOR	MINOR
GENERAL		
a. Any hole, scissors or knife cut, tear, mend, burn, or weakening defect such as smash, multiple float, loose slub, needle chew, or abraded area	X	
b. Any portion of the gown stiffened or scorched by any process of manufacturing	X	
c. Any missing or broken yarn, thin place, misweave, woven in waste, loose yarn, snagged thread, area of no dye penetration, or dye streak on the exterior of the gown, as applicable	1/	
CUFF		
a. Any run or dropped stitch	1/	
b. Any lacking elasticity, too tight or loose	X	
c. Any wales not in the length direction	X	
SHADED PARTS		
a. Any part shaded or any shade bar		X
b. Color of any component not as specified or not uniform		X
CLEANNESS		
a. Three or more thread ends not trimmed to a maximum length of 1/4 inch or three or more thread scraps not removed		X
b. Any unslightly slub, spot, or stain; any discoloration of the cloth caused by the removal of any shade and size marking ticket; any shade and size marking ticket, excluding the metal fastening or sewn-on kind, not removed; any shade and size marking identification stamping visible on the outerside of the gown; or c. shade and size marking adhesive mass adhering to the fabric		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI (cont'd)

DEFECT	MAJOR	MINOR
CLEANNESS (cont'd)		
c. Any metal fastening device or sewn-on shade and size marking ticket attached to the gown	X	
d. Any marking used for locating the position for attaching of any component visible on the top or underside of the gown		X
COMPONENTS AND ASSEMBLY		
a. Any component not as specified or any defect of component or defect of assembly, not herein classified	1/	
b. Any component, component part, or required operation omitted, or any operation improperly performed, not herein classified	1/	
c. Any dimension not as specified, not herein classified	1/	
SEAMS AND STITCHING		
a. Accuracy of seaming:		
1. Any seam, hem, or attachment of any component twisted, puckered, or pleated; any part of the gown or of any component caught in an unrelated operation or stitching; any seam edge not properly forced out or contains any fold		X
2. Ends of stitching that are not caught in other seams or stitching:		
(a) Any not securely backstitched	X	
(b) Any secure but backstitched for a distance less than 1/2 inch or the backstitching is not overlapped on itself		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI (Cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (cont'd)		
3. Thread breaks:		
(a) Any not securely overstitched	X	
(b) Any secure but overstitched for a distance less than 1/2 inch		X
b. Gage of stitching 2/:		
1. Any stitching irregular, unevenly or not gaged as specified, or not uniform		X
c. Open seams 3/:		
1. Other than on the hem:		
(a) Any more than 1/8 inch but not more than 1/4 inch		X
(b) Any more than 1/4 inch	X	
2. On the hem:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
d. Raw edges 4/:		
1. Outerside or innerside of the gown:		
(a) Any more than 1/4 inch but not more than 1/2 inch		X
(b) Any more than 1/2 inch	X	
e. Seam and stitch type:		
1. Not specified seam or stitch	1/	
2. Any looper thread on the outerside of any gown seam, when Stitch Type 401 is used	X	

Source: https://assist.dla.mil -- Downloaded: 20261O-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI. (Cont'd)

DEFECT	MAJOR	MINOR
SEAMS AND STITCHING (cont'd)		
f. Stitch tension:		
1. Any loose stitching 5/	1/	
2. Any tight stitching, resulting in breakage of the stitches, when normal pull is applied 6/	X	
g. Stitches per inch 7/:		
1. Stitches more or less than specified:		
(a) Gown (excluding label):		
(1) One or 2		X
(2) More than 2	X	
(b) Label:		
(1) One to 3		X
(2) More than 3	X	
h. Bartacks:		
1. Any missing, loose, misplaced, or not serving the intended purpose	X	
2. Length of any not as specified	1/	
3. Any not located as specified	1/	
DETAILED DEFECTS APPLICABLE TO SPECIFIC PARTS OF THE GOWN		
COLLAR		
a. Short or long causing puckering or twisting on the front or back	X	
b. Uneven in width by more than 1/8 inch		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI (Cont'd)

DEFECT	MAJOR	MINOR
COLLAR (cont'd)		
c. Ends extend more than 1/8 inch beyond the edges of the back opening		X
d. Width of the collar less than 1-1/8 inches or more than 1-3/8 inches		X
NECKTAB		
a. Front or necktab twisted or puckered or causing twisting or puckering to the front		X
b. Not centered within 1/4 inch or not formed to a point at the bottom		X
c. Not uniform in size or shape		X
d. Less than 3-3/8 inches or more than 3-5/8 inches in width		X
e. Less than 6-1/8 inches or more than 6-3/8 inches in length		X
f. Omitted	X	
BELT		
a. Constructed from more than two continuous pieces of the fabric		X
b. Not one continuous length (contain splices)		X
c. Puckered or pleated at the attaching seam		X
d. Less than 68 inches in length or less than 2 inches in width		X
e. Out of horizontal alignment by more than 1/4		X
f. Width of rectangle attaching stitching less than 5-1/2 inches or more than 6-1/2 inches		X
g. When applicable, crossbox stitching at each end of rectangle less than 7/8 inch or more than 1-1/8 inches in width		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VI (Cont'd)

DEFECT	MAJOR	MINOR
BELT (cont'd)		
h. When applicable, diagonal stitching omitted inside of any box stitching		X
i. When applicable crossbox stitching omitted from any end of the rectangle		X
PLEATS		
a. Pleats at the top and bottom edges of the reinforcement patch overlapped or spread more than 1/8 inch apart		X
SHOULDER SEAM		
a. Any back not overlapping any front		X
SLEEVES		
a. Right sleeve in the left armhole or left sleeve in the right armhole; or any sleeve in its proper armhole installed in a reverse position	X	
b. Any pleated at any armhole seam or any tight at any armhole causing puckers on any front or back		X
c. Any armhole seam staggered at the side seam by more than 3/8 inch		X
d. Any back or front that does not lap the sleeve at the seam		X
CUFFS		
a Any less than 4-1/4 inches or more than 4-3/4 inches		X
b. Any not double thickness	X	
c. Any twisted, puckered or pleated		X

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T08:49Z
Check the source to verify that this is the currentversion before use.

TABLE VI (Cont'd)

DEFECT	MAJOR	MINOR
BOTTOM HEM		
a. Width less 7/8 inch or more than 1-1/8 inches		X
TIE TAPES		
a. One or more omitted or added	X	
b. Attached so that collar ends or back opening will not overlap	X	
c. One or more positioned on the inside of the left back or left end of the collar, or on the outside of the right back or the right end of collar	X	
d. Any tape off center on the collar by more than 1/4 inch		X
e. Any less than 12 or more than 13 inches in length		X
f. Any free end of the tie tapes not hemmed		X
g. When applicable, the diagonal lines omitted from the crossbox stitching		X
h. Attachment 8/:		
1. Less than 1-3/8 inches or more than 1-5/8 inches from the right or left edge of the back of the collar		X
2. Any second tie tape positioned less than 5-3/4 inches or more than 6-1/4 inches from the collar tapes		X
3. Any third tie tape positioned less than 11-3/4 inches or more than 12-3/4 inches from the collar tape		X
FACING		
a. Any short, tight or twisted causing puckers		X
b. The width of any facing less than 1-7/8 inches or more than 2-3/8 inches		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

Table VI (Cont'd)

DEFECT	MAJOR	MINOR
LABEL		
a. Size missing, incorrect, or illegible or color of any label not as specified	X	
b. Other than the size information, incomplete, incorrect, or illegible		X
c. Misplaced, off center of the back by more than 1/2 inch		X
d. Stitching omitted on one or more edges		X
e. When applicable, any evidence of separation of any heat attached label		X
MARKING (when applicable)		
a. Caduceus and letters US:		
1. Any missing, incorrect or illegible	X	
2. Not positioned on the right side hem near the bottom of the gown.		X

1/ The defect shall be classified and scored as a major defect, when it seriously affects the serviceability or appearance, otherwise it shall be classified and scored as a minor defect.

2/ The gage of stitching defect shall be scored only when the condition exists for more than 2 inches on any row of stitching.

3/ A seam shall be classified and scored as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be classified and scored as open when either one or both sides of the seam contain any of the aforementioned for a single stitched seam.

4/ Any edge that should be turned under and is not, but is securely caught in the stitching, shall be classified and scored as a raw edge. Any raw edge that is not securely caught in the stitching shall be classified and scored as an open seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

5/ A seam shall be classified and scored as loose when the top and bobbin threads are on the same surface.

6/ Puckering is evidence of tight tension or gathering of the material. When puckering is evident and is not caused by the gathering of the material, the stitching shall be inspected for tight tension and breaking of stitches by exerting normal pull in the lengthwise direction of the stitching, by pulling the material taut to straighten out the seam. Puckering due to the gathering of the material shall be classified and scored as an accuracy of seaming defect.

7/ The stitches per inch defect shall be scored only when the condition exists for more than 3 inches on any row of stitching.

8/ The distance between the tie tapes shall be taken between the nearest edges (bottom edge of the upper tape to the top edge of the lower tape).

TABLE VII
LIST OF DEFECTS FOR THE DIMENSIONS OF THE ASSEMBLED GOWNS

ASSEMBLED MEASUREMENT	DEFECT
Measure the chest, back length, distance from the center of the belt to the bottom of the collar, collar length, sleeve length and belt length.	Any measurement deviating from the measurements specified in 3.4 and Table II and applicable tolerance shall be enumerated as a dimensional defect.
Equal Length	
Sleeves	The variation in length between the left and right sleeve dimension shall be enumerated as a dimensional defect when it exceeds 1/2 inch.

4.3.4.2 Preparation for delivery. Each of the fully prepared shipping containers, containing gowns of one size, selected in accordance with Table III as a sample unit from the lot, shall be visually examined to determine that the packaging, packing, and marking conform to this specification. The list of defects, Table VIII, shall be used to enumerate the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

TABLE VIII
LIST OF DEFECTS FOR PREPARATION FOR DELIVERY

ITEM	DEFECT
Exterior and interior markings	Missing, incorrect, incomplete, or illegible; improper size, location, sequence, or method of application not as specified; size shown on any exterior container or on the label of the gown not the same.
Packaging and packing materials	Any non-conforming component; any component or component part missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of any exterior container, container flap, or loose strapping; bulging or distortion of any container; any polyethylene bag damaged, any vent hole missing, or any open or non-continuous heat sealed seam.
Exterior and interior weight or content	Gross or net weight exceeds the requirement; number per container more or less than specified; more than one size gown in the same container; any portion of the gown caught in any heat sealed seam; any gown distorted, deformed, or bent; any not individually packaged within the polyethylene bag.

4.3.5 Procedure for measuring. The gown to be measured shall be laid flat, without tension, on a smooth, flat surface so that any wrinkles or creases shall not affect the measurement. The measurements shall be made with the use of a yard stick, metal tape, or by use of any suitable measuring device. The measurements shall be made as follows:

a. The waist dimension shall be determined as follows:

   (1) Fold the gown in half longitudinally and measure from the center of the belt and across the center of the belt to the edge of the back opening.

b. The back length dimension shall be taken from the top edge of the neck at the center of the back to the bottom of the gown.

c. The distance from the center of the belt to the bottom of the collar dimension shall be determined in the center of the front.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

d. The length of the collar dimension shall be determined by measuring the collar from end to end.

e. The sleeve dimension shall be taken from the folded edge of the back opening at the base of the collar along the upper edge of the sleeve to the end of the stockinet cuff.

f. The belt length dimension shall be taken in the center of the belt from end to end.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. Each gown, as specified, constitutes one unit of issue.

5.1.2 Level A. Each gown shall be neatly folded to an appropriate dimension of 15 inches in length by 13-1/2 inches in width. The size label shall be clearly visible in front so as to permit ready identification. Each gown shall be inserted in a snug fitting, clear polyethylene bag having a minimum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. Closure of the bag shall be effected by heat sealing or by means of a tuck or reverse flap.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Twenty four gowns of one size only, each packaged as specified in 5.1.2, shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, class weather-resistant, grade V3c. Closure, waterproofed, and strapped as specified in the box specification.

5.2.2 Level B. Twenty four gowns of one size only, each packaged as specified in 5.1.2, shall be packed in an exterior container designed for a type 2 load and constructed in accordance with PPP-B-636, class domestic and having a minimum bursting strength of 200 pounds. Closure of the box shall conform to method II as specified in the box specification.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size and name of contractor shall be shown. Marking may be printed directly on the bag or on a label inserted within the bag in such a manner to permit ready identification.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

5.3.3 Labels, mixed sizes. Each shipping container, packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The pleated front, cotton, surgical, operating gowns covered by this specification are intended for wear by the surgical personnel of the Medical Service.

6.2 Ordering data. Procurement documents shall specify the following:

(a) Title, number and date of this specification.
(b) Class, size and quantity desired (see 1.2).
(c) Whether caduceus marking is applicable (see 3.6).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Patterns. The patterns for the gowns will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.3.1). The pattern parts shall consist of the following:

NOMENCLATURE	CUT PARTS
Front 1/	One
Back	Two
Collar	One
Sleeve	Two
Sleeves (2 piece)	Four
Necktab	One
Belt (one piece) 2/	One
Belt reinforcement patch	One

1/ The front may be pieced through the center with seam allowances added.


2/ The belt may be cut in two pieces with seam allowances added.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.


6.4 Catalog Information. This specification is intended to cover the following items appearing in the Federal Supply Catalog:

NATIONAL STOCK NO.	ITEM IDENTIFICATION	SPECIFICATION DESIGNATION CLASS
6532-00-299-9624	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, Green, Size Large, Each	2
6532-00-299-9625	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, Green, Size Medium, Each	2
6532-00-299-9626	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, Green, Size Small, Each	2
6532-00-716-0005	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, White, Size Large, Each	1
6532-00-716-0010	GOWN, OPERATING, SURGICAL, COTTON, Pleated Front, White, Size Medium, Each	1
6532-00-716-0015	GOWN, OPERATING, SURGICAL, Cotton Pleated Front, White, Size Small, Each	1
6532-00-935-0988	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, Green, Size Extra Large, Each	2
6532-00-935-0989	GOWN, OPERATING, SURGICAL, Cotton, Pleated Front, White, Size Extra Large, Each	1

Source: https://assist.dla.mil -- Downloaded: 20261O-21T08:49Z
Check the source to verify that this is the current version before use.

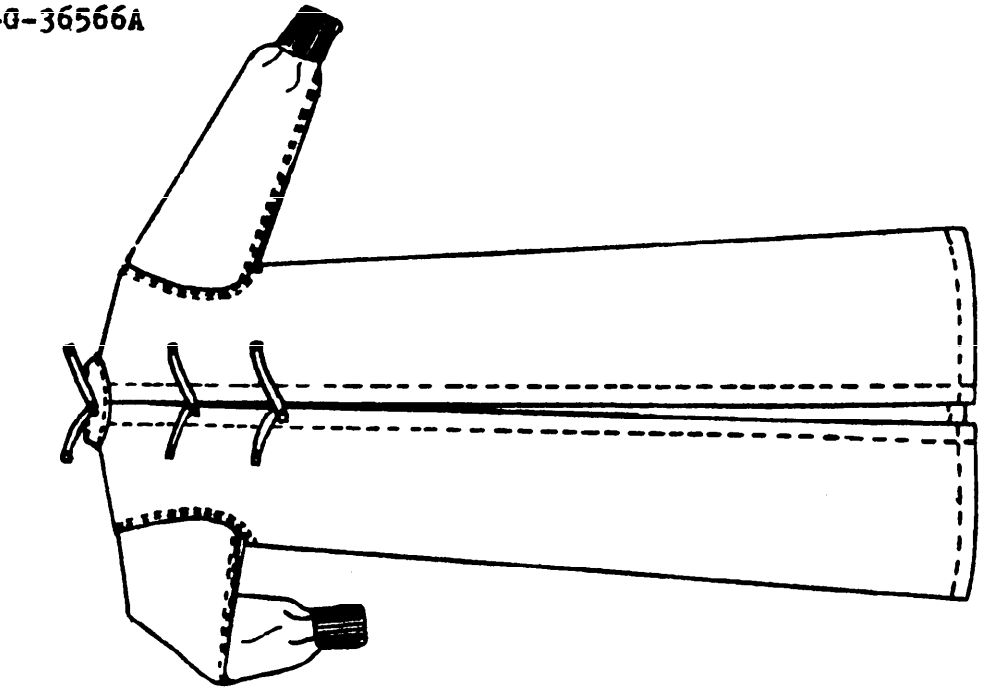

BACK

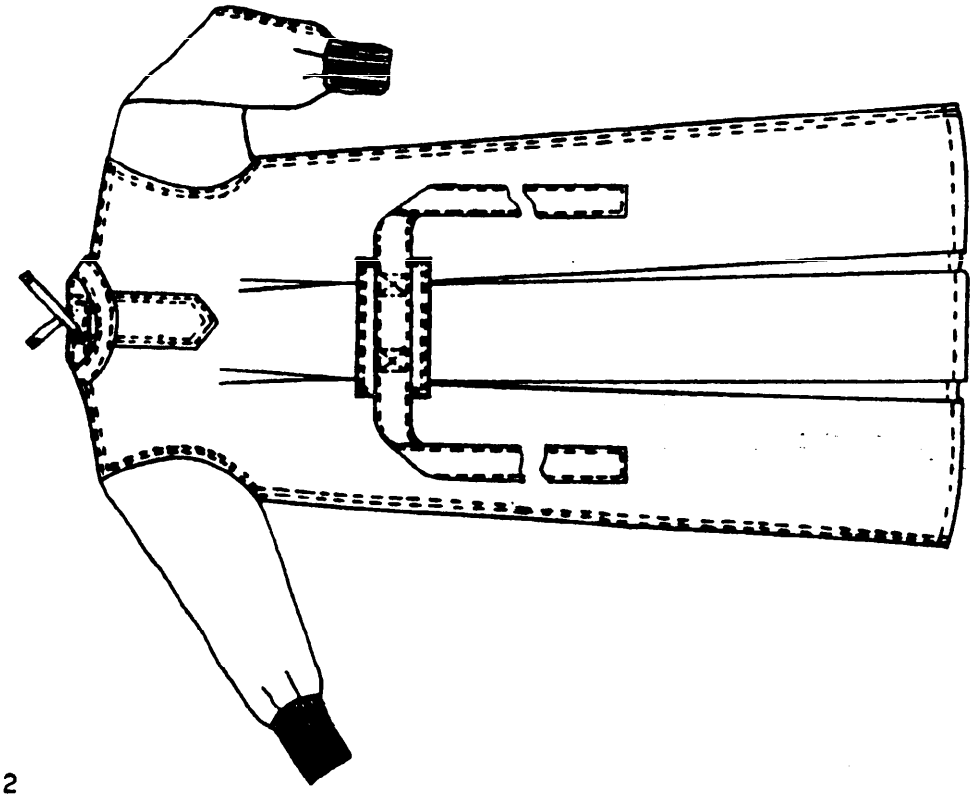

FRONT

FIGURE 1. GOWN, OPERATING, SURGICAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

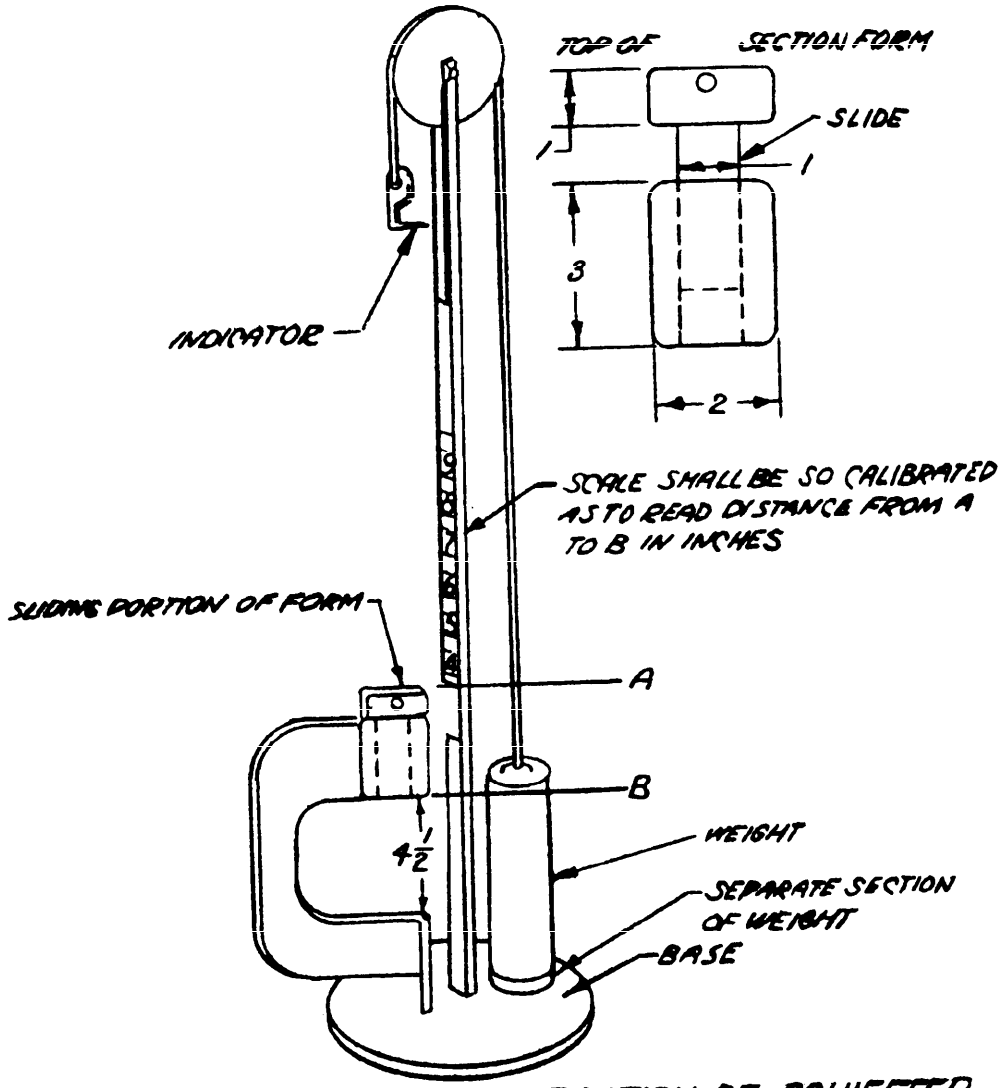


FIGURE 2. HOUCHIN MODIFICATION OF SCHIEFFER MACHINE

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:49Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply - DM

Project No. 6532-1092
is

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-G-36566A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:49Z
Check the source to verify that this is the current version before use.