MIL-S-36573B
24 January 1974
SUPERSEDING
MIL-S-36573A
18 December 1972

MILITARY SPECIFICATION

SMOCK, DENTAL OPERATING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a polyester-cotton, durable press, dental operating smock, coat length.

1.2 Classification. The dental smocks covered by this specification shall be of the following sizes, as specified (see 6.2).

Small	Large
Medium	Ex-Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

V-B-871	Button, Sewing Hole, and Button, Staple, Plastic.
V-F-106	Fastener, Slide, Interlocking.
V-T-285	Thread, Polyester.
DDD-L-20	Label; for Clothing, Equipage and Tentage (General Use).
MMM-A-250	Adhesive, Water Resistant for Sealing (fiber boxes).
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-T-76	Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-TEST-METHOD-STD-191	Textile Test Methods.
FED-STD-751	Stitches, Seams and Stitchings.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

STANDARD COLOR CARD OF AMERICA.

The Textile Color Card Association of the United States, Inc.

(Application for copies should be addressed to the Textile Color Guard Association of the United States, Inc., 200 Madison Avenue, New York, N. Y., 10016).

TECHNICAL MANUAL OF THE AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS.

(Application for copies should be addressed to AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, North Carolina 27709).

3. REQUIREMENTS

3.1 Materials.

3.1.1 Fibers.

3.1.1.1 Polyester fiber. The fiber shall be polyethylene glycol terephthalate.

3.1.1.2 Cotton. The cotton shall be combed.

3.1.2 Yarns. The warp and filling yarn shall be a blend of 50 ± 3 percent polyester and the remaining percentage cotton, based on the dry weight of the desized and finished cloth before treatment.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:50Z
Check the source to verify that this is the current version before use.

3.1.3 Cloth.

3.1.3.1 Weave. The weave shall be a fancy basket weave.

3.1.3.2 Color. The color shall be green shade No. 336, matching the approved shade standard.

3.1.3.2.1 Labile sulfur. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The cured and dyed cloth shall show no more than a slight trace of labile sulfur.

3.1.3.2.2 Matching. The color of the cured cloth shall be a good approximation to the standard sample under natural (north sky) daylight or artificial daylight having a color temperature of 7500° Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800° Kelvin.

3.1.3.2.3 Colorfastness. The finished, cured cloth shall show fastness to laundering (5 cycles), crocking, perspiration and light equal to or better than the standard sample. When a standard is not avilable, the finished cured cloth shall show "fair" fastness to laundering (5 cycles), crocking, perspiration and light.

3.1.3.3 Cloth preparation. The cloth shall be desized, scoured, mercerized, bleached and stabilized or heat set prior to dyeing.

3.1.3.4 Nonfibrous materials. The **starch** and protein content including chloroform-soluble and water-soluble material of the dyed cloth prior to treatment shall not exceed 2.0 percent.

3.1.3.5 Cloth treatment. The finished cloth shall be given either a pre-cured or post-cured type durable press treatment, consisting of a suitable catalyzed resin or reactant system in combination with hand modifiers. A wetting agent may be used to facilitate processing. The cloth shall be processed so that the uncured and cured cloth shall meet the applicable requirements of this specification.

3.1.3.6 Physical requirements. The finished and cured cloth shall conform to the requirements listed in table I. Testing to be conducted after 15 laundering and drying cycles as specified in paragraph 4.6.

Table I - Physical requirements

Weight oz. sq. yd.	Yarns per inch minimum		Breaking strength pounds minimum		Tearing strength grams minimum	
Minimum	Warp	Filling	Warp	Filling	Warp	Filling
4.7	94	68	90	75	3500	3000

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:50Z
Check the source to verify that this is the current version before use.

3.1.3.6.1 pH. The pH value of the water extract of the cured cloth shall be not less than 5.0 nor more than 8.5.

3.1.3.6.2 Dimensional stability. The cured cloth shall not shrink more than 2.0 percent in either direction (warp or filling) after 15 laundering and drying cycles.

3.1.4 Thread, polyester. The thread shall conform to type I, class 1, sizes A and 00 of V-T-285; or shall be a core thread, consisting of a polyester core covered with cotton yarn. The thread shall conform to the requirements for 70/2 of MIL-T-43548. The thread shall be dyed green to match the basic fabric (see 3.1.3.2).

3.1.4.1 Colorfastness. The dyed thread shall show "good" colorfastness to laundering, perspiration and light when tested as specified in V-T-285.

3.1.5 Fastener, slide. The slide fastener shall be type IV, style No. 8, size LMS, 18 inches long with short tab pull in accordance with V-F-106. The metal shall be brass. The tape shall be fabricated from an intimate blend of cotton/nylon in the warp (50 to 55 percent nylon staple) and nylon filament in the filling or 50 percent cotton/50 percent nylon warp and filling. The tape shall be dyed to match the base fabric of the garment. The tape shall show "fair" fastness to laundering. The tape shall be given a durable press treatment consisting of a suitable catalyzed and cured system. Hand modifiers and a wetting agent may be used to facilitate processing.

3.1.6 Button. The button shall be type II, class k, style 25 of V-B-871. The button shall be 19-line and the color shall be pearl.

3.1.7 Labels. Each smock shall have a combination size and identification label, and a laundry instruction label. The combination size and identification label shall conform to type I, classes 1 and 2 of DDD-L-20, except that the color of the finished label shall be dyed (see 3.1.7.2).

3.1.7.1 Alternate combination label. As an alternate, the combination size and identification label shall be constructed of cloth cotton coutil or poplin, having a nominal greige weight of 2.11 yards per pound, based on 45 inch width. The basic cloth shall be dyed (see 3.1.7.2). The label shall be printed in black by rotogravure to withstand repeated laundering and retain legibility throughout the useful life of the garment to which the label is attached. The label shall be a sew-on type. The label shall be of adequate size to contain the item description, contract number, size, Federal stock number, and any information required by the Fur, Wool, or Fiber Products Act, as appropriate. The size and type of print shall be as specified for Type I, classes 1 and 2 label of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

3.1.7.2 Color. The combination size and identification label shall be vat or naphthal dyed one of the following colors for the appropriate size:

Primitive Green (cable No. 70167)	for Extra Large Size
Indian Orange (cable No. 70072)	for Large Size
Lemon Yellow (cable No. 70205)	for Medium Size
Peach Blossom (cable No. 70098)	for Small Size

The cable series are from the Standard Color Card of America, 9th Edition.

3.1.7.3 Colorfastness. The finished dyed labels shall show good colorfastness to laundering transference and fair colorfastness to accelerated laundering: the printing shall be clearly legible after being tested as specified in section 4 of DDD-L-20.

3.1.7.4 Instruction label. The laundry instruction label shall conform to type I, class 3 of DDD-L-20, except the content of instruction shall be as shown below. The label color shall be yellow, Cable No. 70208.

Durable Press

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140° F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.2 End item appearance.-

Source: https://assist.dla.mil -- Downloaded: 20261O-21T08:50Z
Check the source to verify that this is the current version before use.

3.2.1 Fabric and seam appearance rating.- The fabric and seam appearance ratings of the finished cured smocks after washing shall be as indicated below when tested as specified in 4.6:

	Minimum average rating per sample unit after 5 washings
Fabric appearance	3.5
Seam appearance:	
Exclusive of zipper and label area, all seams, including front, sleeves and collar	3.5

3.3 Design. The smock shall be sport coat length, with collar, belted back, one vest pocket, and elbow length sleeves. The smock shall have an open front, secured with a concealed metal slide fastener.

3.4 Figure. The figure is furnished for information only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which show size, directional lines and notches for correct assembling and shall not be altered in any way. The standard patterns provide a 3/8 inch seam allowance for all seams, unless otherwise indicated in table III.

3.5.1 List of pattern parts. The component parts of the smock shall be cut from the specified materials in accordance with the number of parts required in table II.

Table II. List of pattern parts

Material	Pattern item identification	Cut parts
Cloth, polyester-cotton, basket weave, durable press	Front.	2
	Front yoke.	2
	Back.	1
	Top sleeve.	2
	Under sleeve.	2
	Collar.	2
	Front yoke facing.	2
	Belt.	1
	Pocket.	2

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the currenversion before use.

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam, and stitching types specified in table III shall conform to Fed. Std. No. 751. Where two or more methods of seams or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, puckers or open seams will result. Thread tension shall be maintained so that there is no tight or loose tension.

3.6.2 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in table III.

3.6.3 Thread breaks and ends of seams.- The ends of all seams and stitching, produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks, all stitch types, shall be secured by stitching back of the break not less than 1/2 inch.

3.7 Manufacturing operations requirements. The smock shall be manufactured in accordance with operations specified in table III. The supplier is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible provided that the thread is removed or does not show on the finished smock.

3.7.1 Marking. The parts of the smock shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(a) Metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets which leave an impression or traces of paper or adhesive on the material upon removal of the ticket.

Source: https://assist.dla.mil -- Downloaded: 20260-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
1	Cutting. a. Cut smock in strict accordance with patterns furnished which show size, directional lines, placement of pocket and notches for proper assembly. b. Cut all parts out of one piece of material, except the pocket, under collar, hangers and button loop, which may be cut from ends. c. Cut stripping for hanger and button loop of sufficient size to comply with operation 4 a, b, or c. NOTE: Cut width of stripping will vary depending on which method of operation 4 is used.					
2	Replacement of damaged parts. a. Replace, at time of cutting, any part containing a hole, smash, multiple float or loose slub. b. Replace any part damaged during manufacturing process, by needle chew, tear, cut, hole, burn, or large exposed drill hole. (Unit containing a visible mend will not be acceptable).					
3	Marking (see 3.8.1). a. Mark, ticket, or bundle all component parts, except those cut from ends, to insure a uniform shade and proper assembly throughout the garment.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
4	Make hanger and button loop.					
	Finished Appearance. The hanger loop on the finished smock shall measure 1/4 inch ± 1/16 inch wide, and 2 inches ± 1/4 inch long. The button loop of finished smock shall measure 1/4 inch ± 1/16 inch wide, and the opening 5/8 to 3/4 inch long.					
	a. Fold stripping to center with raw edges abutted and stitch 3/16 to 1/4 inch gage, with the covering stitching on the underside.	406	EFh-1	8-12	A	00
	or					
	b. Fold stripping in half and with raw edges turned in, stitch 1/16 inch from edge.	301	EFp-1	8-12	A	00
5	Make pocket.					
	a. Place the two plies of pocket material face to face and stitch continuous both sides and bottom, leaving the top open.	512, 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over-edge)	00 00

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
6	Attach labels.					
	a. Place combination size and identification label at center back (1/4 inch off center tolerance allowable), not more than 1/4 inch below bottom row of stitching of collar, and stitch on all four sides.	301	LSbj-1	8-12	A	00
	b. Place laundry instruction label directly below the combination label. Stitch on four sides. When the combination label is sewn on, the top of the instruction label may be caught in the bottom row of stitching of the combination label. NOTE: Top of combination label when sewn on, may be caught in the seaming of operation 19 b, with the remaining three sides stitched down.	301	LSbj-1	8-12	A	00
7	Sew on belt.					
	Finished appearance. The half belt on back of smock shall be over the pinch pleats, two on each side of back. The outside folded edge of each pleat shall be turned toward its respective side seam. The finished belt shall measure 2 inches ± 1/4 inch wide.					
	a. With the belt positioned on back of smock and the pinch pleats formed as indicated by marks on patterns, turn in top and bottom edges of belt and seam to smock with stitching 1/16 to 1/8 inch from each edge.	301	LSd-1 (each edge)	8-12	A	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
8	Sew on front yoke facings.					
	a. Position yoke facings on the right and left front yokes, face to face. Place the ends of the button loop between the facing and left front yoke, at the top front of the yoke. Seam the front edges. The button loop ends shall be caught in the stitching of the facing to the left front yoke.	301	SSa-1	8-12	A	00
	b. The back edge of the yoke facings shall be overedge stitched to secure raw edges.	504 or 505	EFd-1	8-12	A or 00	00
9	Sew on front yoke to front, left side.					
	a. With the yoke and the front face to face, seam yoke to front.	512 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over-edge)	00
10	Sew on front yoke and pocket to front, right side.					
	a. Position pocket on right front, as indicated by notches on pattern with the front ply of pocket and front face to face. Seam from notch to notch, placing a 1/4 inch tack on both ends of the stitching.	301	SSa-1	8-12	A	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
10 (cont.)	b. Notch to tacks. With seam edge turned toward bottom of pocket, raise stitch from notch to notch.	301		8-12	A	00
	c. With the front yoke, front, and back ply of pocket face to face, seam yoke to back ply of pocket and front. The top edge of pocket opening shall not be caught in the seaming, and there shall be no raw edges visible at corners of pocket openings.	512 515 516 517 or 519	SSa-2	8-12	A (chain) A or 00 (over- edge)	00
	d. Stitch pocket forming pencil division as indicated by marks on patterns, catching the pocket and the front seam allowance, and securely tacking the ends of stitching.	301	SSa-1	8-12	A	00
11	Make collar.					
	Seam the two plies of collar together, along the top and across the ends. Trim points and turn collar, and work out edges and points. The collar may be pressed.	301	SSe-2(a)	8-12	A	00
12	Make sleeves.					
	With the back and front arm sleeve face to face, join back seam.	512, 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over- edge)	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
13	Hem fronts.					
	a. Fold back fronts, and position fastener on fronts as indicated by marks on patterns; stitch to fronts with one row of stitching. The stitching shall start or terminate at the front edge at the top of fastener tape; inward for a distance of 5/16 inch ± 1/16 inch from front edge and down the entire front. The top end of the tape shall be turned under and caught in the stitching. The top and bottom ends of the tape shall be securely tacked.	301		8-12	A	00
	b. When fronts are not cut on selvage, the raw edges shall be overedge stitched.	504 or 505	EFd-1	8-12	A or 00	00
14	Join shoulder seams.					
	With the front and the back face to face, join the shoulder seams. The overedged shoulder seam shall face the back of the garment.	512, 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over-edge)	00
15	Set sleeves.					
	Set sleeves matching notches and seam. The overedged shoulder seams shall face the back of the garment, and the overedged front yoke seams shall face the bottom of the garment.	512, 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over-edge)	00

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
16	Join side and sleeve seams.					
	Join the side and sleeve in a continuous operation. The sleeve setting seam at arm pit shall not be staggered. At the intersection of the side and armhole seams, the overedged armhole seam shall face the sleeve. The ends of the belt shall be caught in the seaming.	512, 515, 516, 517, or 519	SSa-2	8-12	A (chain) A or 00 (over-edge)	00 00
17	Hem sleeves.					
	Turn under bottom of sleeves, as indicated by notches on pattern. Turn in the raw edges and seam through sleeve 1/16 to 1/8 inch from edge. Hem shall finish 1 inch ± 1/8 inch in width. Both overedged sleeve seams shall be caught under the sleeve hem and shall face the back of the garment.	301	EFb-1	8-12	A	00
18	Hem bottom of smock.					
	Turn up bottom of smock, turn in raw edges and stitch 1/16 to 1/8 inch from edge, with the finished hem measuring 1 inch ± 1/8 inch. The overedged side seams shall face the back of the garment.	301	EFb-1	8-12	A	00

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
19	Sew on collar.					
	a. Position collar between fronts and facings and stitch from front edge 3/4 to 1 inch from top ends of facings. Notch through all plies, pick up facings and top collar and continue stitching under collar to back of neck.	301	SSa-1	8-12	A	00
	b. Turn in raw edge of top collar and stitch to neck 1/16 to 1/8 inch from edge, catching top ends of facings and ends of hanger loop, evenly spaced at center back in the stitching.	301	LSd-1	8-12	A	00
20	Stitch inside edge of yoke facings.					
	Stitch inside edge of facings from collar seam downward for a distance of 2 inches ± 1/2 inch.	301	LSbj-1	8-12	A	00
21	Sew on button.					
	a. With finished fronts abutting and button loop extending toward right front, mark position for button.					
	b. Sew on button to correspond to button loop. The front and front facing seam allowances, or the collar seam allowance shall be caught in the button stitching. The facing shall not be caught in the stitching.	101 or 301		20-24 10-14	A A	 00
22	Clean smock.					
	Trim off all thread ends; remove all loose threads, spots, stains, and shade markings.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Table III. Manufacturing operations requirements (con't)

No.	Operation	Stitch type	Seam and stitching type	Stitches per inch	Thread	
					Needle	Bobbin
23	Press smock. The smock shall be hot head pressed.					
24	Curing. (Applicable to post-cured only) The pressed smock shall be suspended on a hanger, with slide fastener closed, and shall be subjected to dry oven heat. The temperature shall be adequate to obtain the required results.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

3.8 Sizes and measurements. The sizes and measurements of the finished smock shall be in accordance with table IV. All measurements and tolerances are expressed in inches.

Table IV. Table of measurements

Smock	Small	Medium	Large	X-Large	Tolerance Plus - Minus
1/2 Chest 1/	21-3/8	23-3/8	25-3/8	27-3/8	1/2 - 1/2
Back length 2/	30-1/2	31	31-1/2	32	1/2 - 1/2
Sleeve inseam 3/	7-1/2	7-1/2	7-1/2	7-1/2	1/4 - 1/4

1/ One half chest measurement on a line at base armhole, from folded edge to folded edge with front edges abutting.
2/ Back length measurement taken from base of collar at center back to bottom of smock.
3/ Measure along sleeve inseam, from base of armhole to bottom of sleeve.

3.9 Workmanship. The finished smock shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspecitons are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.3 Inspection. Inspection shall be in accordance with MIL-STD-105 except where otherwise indicated.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

4.3.1 First article. When required, the preproduction sample submitted in accordance with the Invitation for Bid shall be inspected as specified in 4.5.1 for compliance with design, workmanship and dimensional requirements.

4.3.2 Component and material testing.- In accordance with 4.1 above, components shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this purchase description or applicable purchase document. In addition, testing shall be performed on components listed in table V for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED-Test Method-STD-191 and as listed in tables V and VI. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results.

4.3.2.1 Sampling for testing.- Unless otherwise specified in a subsidiary specification, the sampling for testing shall be as specified below:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 or 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any test requirement specified. The sample unit shall be 4 continuous yards full width of the cured and finished cloth and 1/2 yard full width of the untreated cloth.

TABLE V - Test Methods - Applicable to Untreated Cloth

Characteristic	Requirement Paragraph	Test Method
Polyester identification	3.1.1.1	1/
Cotton identification	3.1.1.2	1/
Cotton - combed	3.1.1.2	1/
Fiber content		
Polyester-percent	3.1.2	4.4
Weave	3.1.3.1	Visual 1/
Nonfibrous Materials	3.1.3.4	2611

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

TABLE VI - Test Methods-Applicable to Treated and Cured Cloth

Characteristic	Requirement Paragraph	Number of Launderings	Test Method
Yarns per inch			
Warp	3.1.3.6	15	5050
Filling	3.1.3.6	15	5050
Breaking strength			
Warp	3.1.3.6	15	5100
Filling	3.1.3.6	15	5100
Dimensional stability			
Warp	3.1.3.6.2	15	par. 4.6.2 and 4.6.3.2
Filling	3.1.3.6.2	15	par. 4.6.2 and 4.6.3.2
Weight	3.1.3.6	15	5041
pH	3.1.3.6.1	0	2811
Labile sulfur	3.1.3.6	0	2020
Colorfastness to:			
Laundering (5 cycles)	3.1.3.2.3	0	5610
Crocking	3.1.3.2.3	0	5651
Perspiration	3.1.3.2.3	0	5680
Light	3.1.3.2.3	0	5660
Tearing Strength			
Warp	3.1.3.6.2	15	5132
Filling	3.1.3.6.2	15	5132
Slide Fastener tape			
Fiber percentage:			
Warp	3.1.5	0	1/
Filling	3.1.5	0	1/
Chemical treatment	3.1.5	0	1/
Colorfastness to laundering (5 cycles)	3.1.5	5	5610

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

4.4.2 Apparatus, reagents, method cited.-

Apparatus as described in Method 2611.
Sintered glass filter crucible of coarse porosity.
Hydrometer.
Sulfuric acid, 74 percent (density 1.67) prepared by pouring 350 cubic centimeters (cc.) of water in a round-bottom flask, then adding 680 cc. of concentrated sulfuric acid slowly, with cooling under the tap. The density of the solution is adjusted to 1.67 using a hydrometer.
Sulfuric acid, dilute (100 cc. of concentrated sulfuric acid added to 1900 cc. of water).

4.4.3 Procedure.- The nonfibrous material shall be removed as specified in Method 2611. The desized specimen shall be dried to a constant weight, cooled in a desiccator and weighed. The specimen shall then be immersed in 200 cc. of 75 percent solution of sulfuric acid for 1 hour with intermittent stirring. The residual fibers shall be transferred to the glass crucible and the excess acid solution removed by suction. The residual fibers shall be washed on the fiber filter successively with dilute sulfuric acid, water, dilute ammonia solution (soak for ten minutes) and again with water (soak for ten minutes). After each separate washing, the crucible is drained by suction. The residue shall be dried to a constant weight in the air oven at 105° to 110°C. This is the "weight of the dry polyester fiber" in the specimen.

4.4.4 Result.- The percentage of polyester fiber shall be based on the following equation:

$$\text{Polyester fiber, percent} = \frac{\text{Weight of dry polyester fiber} \times 100}{\text{Weight of dry desized specimen}}$$

4.4.5 Two specimens shall be tested from each sample unit and the polyester fiber content shall be the average of the results obtained from the specimen tested and shall be reported to the nearest 1.0 percent.

4.5 End item inspection.- Smocks shall be tested as specified in table VII. All test reports shall contain the individual values utilized in expressing the final results. All requirements shall be applicable to the sample unit. The sample size shall be as specified in 4.3.2.1 and the sample unit shall be one finished smock. One smock shall be used to evaluate all appearance requirements. The lot shall be unacceptable if one or more units fail to meet any of the requirements specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

TABLE VII - End item testing - After 5 launderings

Characteristic	Requirement paragraph	Test Method
Seam and fabric appearance rating	3.2.1	4.6

4.5.1 Examination of the end item.- The end item shall be examined for defects listed in 4.5.1.1 through 4.5.2. Classification of defects shall be in accordance with the list shown.

4.5.1.1 General defects.

Defect	Classification Major	Minor A	Minor B
Material defects and workmanship damages:			
a. Any weakening defect such as a smash, multiple float, or large loose slub.	X		
b. Unsightly slub.		X	
c. Hole, cut, tear, visible mend, burn, or needle chew.	X		
d. Large exposed drill hole.		X	
Shaded parts:			
a. Parts cut from ends badly shaded.			X
b. Badly shaded parts (except parts permitted to be cut from ends).		X	
Cleanness:			
a. Spot, or stain on outside.		X	
b. Thread ends not trimmed, loose threads, or one or more shade tickets not removed.			X
c. Shade stamp marking exposed on the outside.	X		
d. Visible basting stitches.			X
Components and assembly:			
a. Any component part of assembly omitted (unless otherwise classified herein.)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Cutting:			
a. Any component part not cut in conformance with specification requirements.	X		
Seams and stitching:			
a. Accuracy of seaming:			
1. Seam twisted, puckered, or pleated	X		
2. Part of garment caught in any unrelated operation or stitching.	X		
3. Ends of seams produced with 301 stitching type, backtacked less than 1/4 inch, when not cuaght in other seams or stitching.			X
4. Ends of a continuous line of stitching overlapped less than 1/2 inch.			X
5. Thread breaks stitched less than 1/2 inch beyond each end of break.			X
b. Gage of stitching:			
1. Irregular, unevenly gaged, or not uniform.		X	
2. Not within range of gage specified, or varies more than 1/16 inch when no range is specified.			X
c. Skipped or broken stitches:			
-up to 1/4 inch, inclusive.			X
-more than 1/4 inch.		X	
d. Raw edges (applicable when edges are required to be turned under and stitched):			
1. On outside seams:			
-1/4 inch to 3/4 inch, inclusive.			X
-more than 3/4 inch.		X	
2. On inside:			
-more than 1 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
e. Run-offs:			
1. On joining seams, when resulting in an open seam, use the open seam classification.			
2. On edge stitching:			
-1/4 inch to 1/2 inch inclusive			X
f. Open seams:			
1. On collar edges or seams joining collar to smock:			
- up to 1/4 inch, inclusive.		X	
- more than 1/4 inch.	X		
2. On all other seams, except hems:			
- up to 1 inch inclusive.		X	
- more than 1/2 inch.		X	
3. On hems:			
- up to 1 inch, inclusive.			X
- more than 1 inch.		X	
g. Seam and stitch type:			
1. Not as specified.		X	
h. Stitch tension (except bartack):			
1. Loose tension resulting in a loose seam.	X		
2. Loose tension on raised or edge stitching, resulting in a loosely exposed lower or top thread.		X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X		
i. Loose tension on one or more bartacks.			X
j. Stitches per inch:			
1. Less than minimum specified by:			
- one or two stitches.			X
- three or more stitches.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Button:			
a. Missing, insecure or defective.		X	
b. Improperly positioned, so that it does not button properly (ex. puckering and pulling).		X	
Pressing:			
a. Burned or scorched.	X		
b. Omitted or poorly pressed.		X	
4.5.1.2 Detailed defects applicable to a specific part of the smock.			
Collar (construction and placement):			
a. Not set between the facing and front.	X		
b. Badly twisted.	X		
c. Puckered or pleated at neck joining seam.	X		
d. Collar off center by more than 1/2 inch.	X		
e. Edges and points not properly forced out.		X	
f. Excess fullness on top of collar.		X	
Front:			
a. Slide fastener not positioned as indicated by marks on pattern.	X		
b. Slide fastener not concealed when in closed position.	X		
c. Front edges of smock not abutting when fastener is in closed position.		X	
d. Stitching attaching fastener to front less than 1/4 inch or more than 3/8 inch away from edge of front.		X	
e. Front edges uneven.		X	
Breast pocket:			
1. Omitted or placed on left side.	X		
2. Front edge of pocket opening cuaght in seaming.		X	
3. Raw edges visible at corners of pocket opening.		X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:50Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Pencil pocket:			
1. Stitching forming pencil pocket not located as shown on pattern.		X	
Sleeves:			
a. Tight, causing puckers or pleats on body parts.	X		
b. Puckered or pleated at armhole joining seam.		X	
c. Sleeve hem finishing less than 7/8 inch or more than 1-1/8 inches wide.		X	
d. Armhole seams at arm pit staggered over 1/4 inch.		X	
e. Armhole seams at arm pit staggered over 1/8 inch up to 1/4 inch.			X
Direction of seams:			
a. Overedged seams not facing specified direction.		X	
Back:			
a. Pleats:			
1. Not positioned as indicated by marks on pattern.		X	
2. Outside fold of pleats not facing toward side seam.		X	
3. Pleats omitted.	X		
b. Belt:			
1. Ends finishing uneven distance from base of armhole by more than 1/2 inch.		X	
2. Twisted in stitching to back, or positioned crookedly.		X	
3. Irregular in width by more than 1/4 inch.		X	
4. Finishing less than 1-3/4 inches or more than 2-1/4 inches wide.		X	
Combination label:			
a. Missing, incorrect, illegible or misplaced.		X	
b. Not specified color.		X	
c. Not stitched on all four sides (when applicable).			X

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Laundry instruction label:			
a. Missing, incorrect illegible, or misplaced.		X	
b. Not stitched on all four sides.			X
Hanger:			
a. Misplaced, or off-center of back by more than 1/4 inch.			X
b. One or both ends not caught in collar joining seam.		X	
c. Less than 3/16 inch or more than 5/16 inch wide.			X
d. Finishing less than 1-3/4 inches or more than 2-1/4 inches long.			X
Button loop:			
a. Misplaced, so as not to button properly.			X
b. One or both ends not caught in the left yoke.		X	
c. Less than 3/16 inch or more than 5/16 inch wide.			X
d. Opening finishing less than 5/8 inch, or more than 3/4 inch long.			X
Bottom hem:			
a. Twisted or puckered.			X
b. Uneven in width by more than 1/4 inch.			X
c. Hem less than 7/8 inch, or more than 1-1/8 inches wide.			X

4.5.1.3 Size measurements.- Any measurement deviating from dimensions and tolerances specified in table IV shall be scored as a size measurement defect. Sleeve inseams uneven in length by more than 1/2 inch shall be scored as a size measurement defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

4.5.1.4 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQL) expressed in defects per 100 units (DHU) shall be as follows:

	AQL	Inspection levels
For 4.5.1.1 and 4.5.1.2 (combined)		
Major	2.5	II
Major and Minor A (combined)	15.0	
Total (Major, Minor A and Minor B combined).	25.0	
For 4.5.1.3		S-3
One Class	4.0	

4.5.2 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking complies with Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers used in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate, application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.
	Bulged or distorted container.
	Open and noncontinuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.
Content	Number of smocks per package and per shipping container is more or less than required.
	Size shown on one or more smocks not as specified in container. 1/

1/ For this defect, one package from each container in the sample shall be examined.

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

4.6 Test methods.

4.6.1 Appearance of smock, seams and fabric.

4.6.1.1 Apparatus and material.

4.6.1.1.1 The following apparatus and material is required for laundering:

a. Automatic Washing Machine (see 6.5).
b. Automatic Dryer (see 6.5).
c. American Association of Textile Chemists and Colorists Standard Detergent 124 or equivalent.
d. Dummy pieces for ballast - 3 x 3 ft. hemmed pieces of type 128 cotton sheeting when added to test smocks, to make a 4 pound load.

4.6.1.1.2 The following apparatus and material is required for evaluation of samples:

a. Overhead lighting procedure - Apparatus shall be as specified in American Association of Textile Chemists and Colorists 124-1969T. In addition, American Association of Textile Chemists and Colorists 88B-1970 photographic standards for evaluation single stitching are required.

4.6.1.1.3 Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that will interfere with the observation, the walls of the room may be painted a flat non-reflecting black, or blackout curtains may be hung on each side of the viewing areas.

4.6.2 Test for characteristics involving laundering.- Three specimens, 22 x 22 inches, measured parallel to the warp and filling shall be cut from a portion of the treated cloth sample which has been pressed and cured flat. One specimen shall be cut from each side of the sample unit to within three inches of the selvages and the third specimen shall be taked from the center. No two specimens shall contain the same filling yarns. The specimens shall be conditioned to equilibrium under Standard Conditions in accordance with FED-Test-Method-STD-191. The conditioned specimens shall be laid without tension of a flat surface, care being taken that the cloth is free from wrinkles or creases. Three distances, each a minimum of 6 inches from each other and not closer than one inch to the edges of the specimen. The distance may be marked with indelible ink and a fine point pen, or by sewing fine threads into the cloth, or by stamping. The measured distance shall be parallel to the respective yarns. Sufficient additional test specimens shall be cut to perform tests for weight, texture, breaking strength.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

4.6.2.1 Laundering.- Place the additional test specimens and the 22-inch by 22-inch specimens in the washer. The washing load shall be approximately four pounds. Dummy pieces shall be added to the machine, along with the specimens to make up the approximately four pound load. Fill to the full water level of the washer with water of a harkness not to exceed 50 parts per million and at a temperature of 140° + 5° F. Add 140 grams of detergent. Set the washer for a 12 minute cycle on the "Normal" setting. Allow the washing to proceed automatically through the final spin cycle. Remove the specimens immediately at the completion of the final spin and separate from the dummy pieces and each other if tangled. Place the complete washed load (4 pounds) in the dryer and dry at the "Normal" cycle and a setting which generates an exhaust temperature range of 140° to 160° F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool down cycle). Remove the load immediately after the machine stops. The load shall then be continued for 15 complete cycles. When the fifteenth cycle is completed, the specimens are conditioned to equilibrium under Standard Conditions in accordance with FED-Test-Method-STD-191.

4.6.3 Evaluation.- Three trained observers shall evaluate each sample unit for appearance and soil release characteristics. The observers shall make theri evaluations independent of each other. Each observer shall evaluate each specimen for appearance as it hangs on the viewing board while standing in front of the viewing board and four feet back from it.

4.6.3.1 Weight, texture and breaking strength. Perform tests for weight, texture and breaking strength specified in Table VI.

4.6.3.2 Dimensional stability.- The laundered and conditioned specimens to be evaluated for dimensional stability shall be laid out without tension on a flat surface in the standard atmosphere, care shall be taken taht the specimens are free from wrinkles and creases. The previously measured distances marked on the specimen shall again be measured in both the warp and filling directions. The dimensional stability of the specimen shall be calculated as follows:

$$\text{Dimensional change, percent} = \frac{A - B}{A} \times 100$$

Where: A = Average of initial measurements (3 specimens)
B = Average measurements after laundering (3 specimens)

The dimensional change of the sample unit in the warp and filling directions shall be the average of the specimens tested in each direction respectively and shall be reported separately to the nearest 0.1 percent. The individual values used to calculate the averages shall also be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

4.6.3.3 Appearance of smock seams and fabric.- One finished smock shall be used.

4.6.3.3.1 Laundering.- The required 5 launderings shall be performed as specified in 4.6.2 and 4.6.2.1. These launderings may be combined with those of the cloth specimens in 4.6.2.1. During interruption of wash and dry cycles the smock shall be placed on a hanger with zipper closed. When the last (5th) cycle is ocmpleted the smock shall be conditioned 2 hours at 70° ± 2° F and 65° ± 2% relative humidity prior to evaluation.

4.6.3.3.2 Evaluation of the appearance of the smock seams and fabric.- The observer shall stand in front of the viewing board and 4 feet back from it. The smock shall be placed on a clothes hanger with the zipper closed and the hanger suspended on the viewing board in such a manner that the smock lies flat on its surface. With the applicable standard placed on the viewing board, the observer will compare the smock to this stnadard and shall rate the smock according to the appearance of the standard that most nearly matches the appearance of the smock. No estimation of ratings falling between standards is allowed. The seams that are to be evaluated shall be as specified in 3.2.2. The average of the rating values assigned by each observer shall be the rating of the smock. Each rating value given by each observer shall also be reported.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One smock, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table VIII shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table VIII Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	48 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be over-packed in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

5.1.3 Level A.

5.1.3.1 Unit package. Each unit shall be cleaned, neatly folded and packaged in a clear polyethylene bag having an average wall thickness at any point below 0.00225 inch. Each bag shall have a 1/8 inch vent hole. Excess air shall be expelled or evacuated from bag and closure effected by means of a continuous heat seal.

5.1.3.2 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-636 type CF, class domestic. Closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Fiberboard boxes shall conform to the special requirements specified in Table II of PPP-B-636.

5.2.1.2 Case liner. Each wood box shall be lined with a waterproof case liner conforming to MIL-L--0547. Closure and sealing shall conform to applicable paragraph of appendix thereto.

5.2.1.3 Closure. Closure of each wood box shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix and waterproofed in accordance with paragraph 30.4 of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Fiberboard boxes shall conform to the special requirements specified in Table I of PPP-B-636. Closure of wood boxes shall be as specified in the appendix of the applicable box specification. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used ofr the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit packages. Each unit package shall be marked in accordance with MIL-STD-129. The date of manufacture shall be shown in lieu of the date packed. The required information shall be printed directly on the bag, or on a label inserted within the bag in such a manner as to permit ready identification.

5.3.2 Intermediate packages. Each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number, name and address of manufacturer shall be shown. The date of manufacture shall be shown in lieu of the date packed.

5.3.3 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129. The date of manufacture shall be shown in lieu of the date packed.

5.3.4 Labels, mixed sizes.- Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The smock is for wear by dental officers.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. First article - when preproduction samples are required (see 4.3.1).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather resistant grade fiberboard shipping containers are required for level B. packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T08:50Z
Check the source to verify that this is the currentversion before use.

6.3 In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following:

The needle should be the smallest possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be jsut enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tensions should be used while maintianing a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained.

6.4 The recommended apparatus for tests in 4.6.1.1.1 a. and b. are:

a. Kenmore Automatic Washing Machine Model 600 or similar machine for the washer. In case of dispute, Kenmore model 600 should be used.

b. Kenmore Automatic Dryer Model 600 or equivalent.

6.5 Intended use. This specification is for smocks, intended for use by medical and dental operating personnel.

6.6 This specification does not include all types, classes, grades or sizes of the commodity indicated by the title of this specification, or which are commercially avilable, but is intended to cover the types, which are normally procured to meet military requirements.

6.7 Supersession data. This specification includes requirements of MIL-S-36573A, and Specification Data Sheet No. 7, in part, dated 18 December 1972.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1064

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.

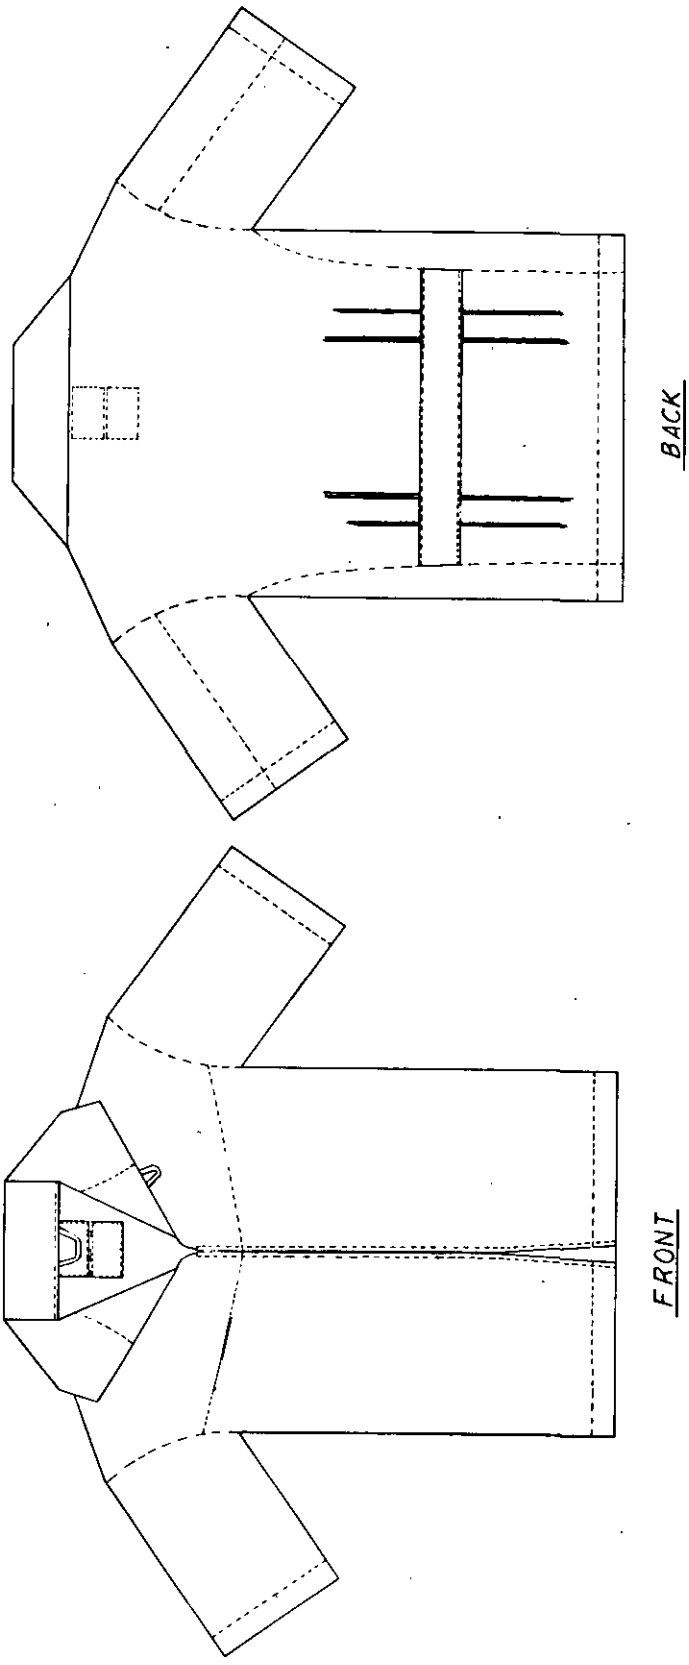


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:50Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974— 713-164/1355

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:50Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-36573B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:50Z
Check the source to verify that this is the current version before use.