INCH-POUND

MIL-DTL-7034/1A
1 April 2005
SUPERSEDING
MIL-DTL-7034/1
5 May 1998

DETAIL SPECIFICATION SHEET

PULLEY, GROOVE, SECONDARY CONTROL, AIRCRAFT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet, MIL-DTL-7034, and QPL-7034.

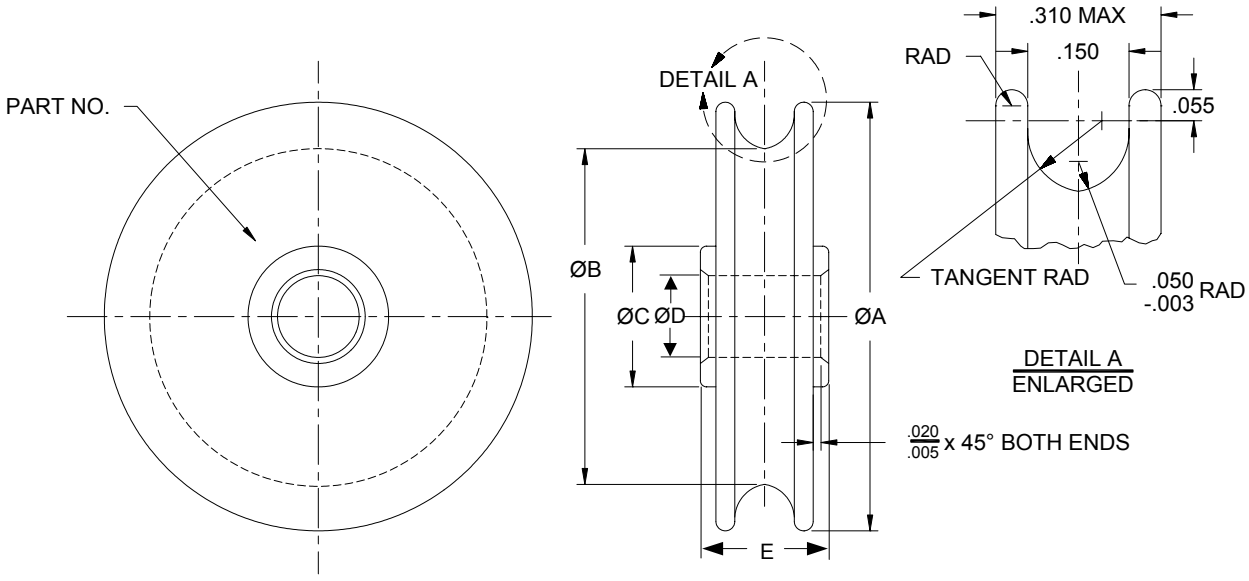


FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:49Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and interface characteristics.

Dash no. 1/		Cable size (ref) (inches)	A	B	C	D	E	Pulley assembly max weight (lb)
Nonmetallic sheave	Metallic sheave		Outside dia ±0.005	Groove dia ±0.005	Shoulder dia (approx)	Bore dia -0.0005	Width I.R. -0.005	
-1	A1	1/16 3/32	1.312	1.000	0.372	0.2500	0.438	0.058
-2	A2		1.750	1.438	0.423			0.066
-3	A3				0.769	0.6250		0.096
-4	A4		2.625	2.312	0.423	0.2500		0.110
-5	A5				0.769	0.6250		0.125

TABLE I. Dimensions and interface characteristics - Continued.

Dash no. 1/		Pulley strength			ABMA bearing (ref)
Nonmetallic sheave	Metallic sheave	Allowable limit load on pulley (lbs)	Max limit load on cable independent of wrap angle		
			1/16 cable	3/32 cable	
-1	A1	480	307 lbs	460 lbs	W4AK 2/
-2	A2				P4K
-3	A3				P10K
-4	A4	920			P4K
-5	A5				P10K

1/ See note 2 for example of complete part number.

2/ The P4K is an approved alternate for the W4AK bearing.

REQUIREMENTS:

1. Material: Material shall be in accordance with MIL-DTL-7034.

2. Finish: Finish shall be in accordance with MIL-DTL-7034.

3. Surface roughness: Surface roughness shall be in accordance with MIL-DTL-7034.

4. Hub may be added to pulley sheave where width of bearing outer race is greater than the maximum width of the pulley sheave.

5. Pulleys smaller than size -2 shall not be used in flight control systems.

NOTES:


(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

1. Dimensions are in inches. Unless otherwise specified, decimal tolerances: +0.000, -0.010. End faces of all bearing hubs shall be flat and square with bore within ±1°.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:49Z
Check the source to verify that this is the current version before use.

2. The part or identifying number (PIN) to be used for pulleys acquired to this specification is created as shown below. In the transition of MS20219 to detail specification sheet MIL-DTL-7034/1, the MS20219 part numbers have been retained as follows:

EXAMPLE: MS 20219 - 2

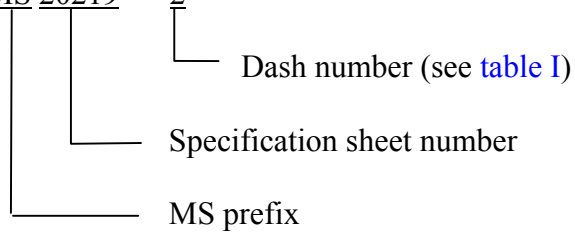

MS20219-2 Indicates: Size 2 nonmetallic sheave and fixed ball bearing with contact seal.
MS20219-A2 Indicates: Size 2 metallic sheave and fixed ball bearing with contact seal.

All dash numbers in table I are identical to and interchangeable with like dash numbers of MS20219.

3. The replacement sequence for this document is AN219 replaced by MS20219 replaced by MIL-DTL-7034/1.

4. For design feature purposes, this specification sheet takes precedence over the acquisition document referenced herein.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - AT
Navy - AS
Air Force - 99

Preparing Activity:
DLA - GS5

(Project 1640-0009)

Review Activity:
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:49Z
Check the source to verify that this is the current version before use.