INCH-POUND

MIL-DTL-7034/4
5 May 1998
SUPERSEDING
MS24566E
17 July 1984

DETAIL SPECIFICATION SHEET

PULLEY, CONTROL, ANTI-FRICTION BEARING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-7034.

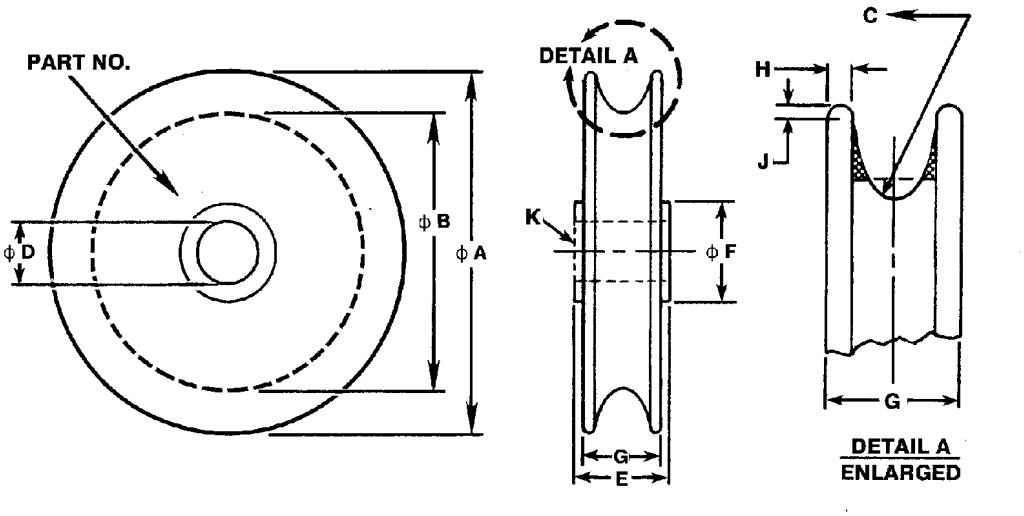

FIGURE 1. Configuration and dimensions

AMSC N/A FSC 3020

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:50Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and interface characteristics.

Dash no. 1/	Cable size NOM DIA (REF)	A Outside DIA -.010	B Groove DIA -.010	C Groove RAD	D Bore DIA -.0005	E I.R. width -.005	F Shoulder DIA (approx)	G Width sheave
-1B	1/16	1.250	.972	.055	.1900	.297	.297	.250
-2B	3/32	2.500	2.222	-.003			.332	-.012
-3B	1/8 5/32	2.000	1.510	.112				.422
-4B	3/16	3.500	3.010	-.003	.2500	.484	.390	-.012
-5B	3/16	5.000	4.374	.145				.500
-6B	7/32 1/4	6.000	5.374	-.005	.3750	.620	.591	±.007

TABLE I. Dimensions and interface characteristics - Continued.

Dash no. 1/	H Flange width	J ±.005	K Bore chamfer X 45°	Pulley Assy Weight Max (lbs)	Pulley Strength Allowable limit load on pulley (lbs)	ABMA bearing (REF)
-1B	.060	.040		.026	300	KP3AK
-2B	±.005			.075	500	KP3K
-3B	.086	.086	.020	.090	600	KP4K
-4B	±.006		-.015	.200	1200	
-5B	.092	.092		.500	3000	KP6
-6B	±.007			.660	4000	

1/ See note 2 for example of complete part number.

REQUIREMENTS:

1. Material: Phenolic see acquisition specification.

2. Finish: see acquisition specification.

3. Surface roughness: see acquisition specification.

4. Hub may be added to pulley sheave where width of bearing outer race is greater than the maximum width of the pulley sheave.

5. Pulleys -1B and -3B shall not be installed on frequently used aircraft controls to bend the cable more than 15° from a straight line.

NOTES:

1. Dimensions are in inches. End faces of all bearing hubs shall be flat and square with bore within ±1°.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:50Z
Check the source to verify that this is the current version before use.

2. Example of complete part identifying number (PIN). In the transition of MS24566 to detail specification sheet MIL-DTL-7034/4, the MS24566 part numbers have been retained as follows:

MS24566	-2B
Basic part identifier	Identifies a size 2 nonmetallic sheave and fixed ball bearing with contact seal

All dash numbers in Table I are identical to and interchangeable with like dash numbers of MS24566.

3. The replacement sequence for this document is AN210 replaced by MS24566 replaced by MIL-DTL-7034/4.

4. For design feature purposes, this specification sheet takes precedence over the acquisition document referenced herein.

CONCLUDING MATERIAL

Custodians:
Air Force - 99
Army - AV
Navy - AS

Review activities:
Air Force - 82

Preparing activity:
DLA - CC

(Project 3020-0001-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:50Z
Check the source to verify that this is the current version before use.