FED. SUP CLASS
FSC MISC

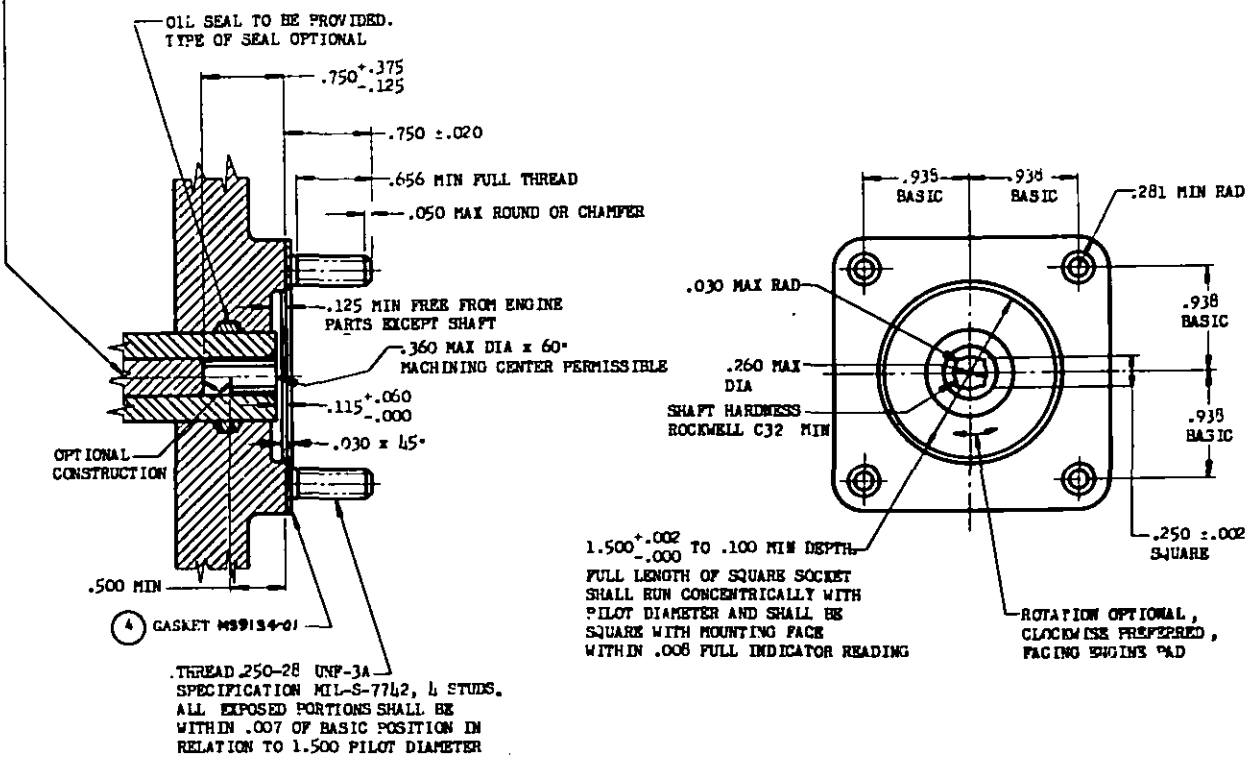

TYPE	TORQUE LB-IN. Tc	Ts	SPEED S RPM	ACCESSORY CLEARANCE	TYPE OF ENGINE
XV-A	7	50	1/2 CRANKSHAFT	AND10310	RECIPROCATING
XV-B	7	50	4200 ±25	AND10310	TURBO JET AND TURBO PROP

(4) THE OIL LEAKAGE OUT OF THIS DRIVE SHALL NOT EXCEED 1 CC PER HOUR.

SPEED: "S" DRIVE SHAFT SPEED AT MAXIMUM RATED ENGINE SPEED.

STRENGTH: SHALL BE CAPABLE OF DRIVING CONTINUOUS TORQUE LOAD (Tc) AT ANY ENGINE SPEED. THE DRIVE SHALL WITHSTAND THE STATIC TORQUE (Ts) WITHOUT FAILURE OR PERMANENT DEFORMATION.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

THIS DRAWING AND THE APPLICABLE ENGINE SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

NOMINAL USE OF THIS DRIVE IS FOR ELECTRICAL TACHOMETER GENERATORS.

PAD OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.

APPROVED 6 Nov 46 REVISED (1) 15 Jul 49 (2) 30 Jun 50 (3) 4 Mar 53 (4) 4 Oct 76

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

DRIVE, TYPE XV, ENGINE ACCESSORY

AND20005

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:30Z
Check the source to verify that this is the current version before use.

Proj. No. MISC-0844

NOT A PART NUMBER