NOT MEASUREMENT SENSITIVE


MIL-I-3575/10E
14 September 1990
SUPERSEDING
MIL-I-3575/10D
26 June 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, AIDE, GENERAL OFFICERS, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

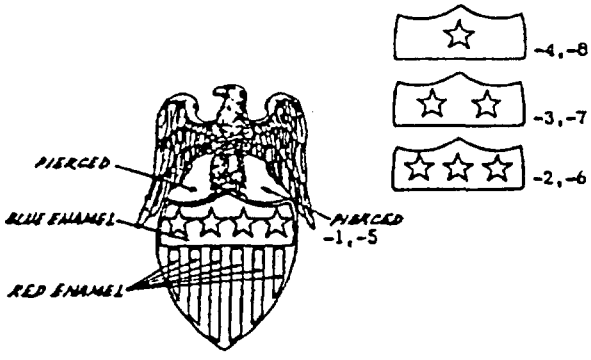

DASH NO:
- -1: Aide, General, Regular
- -2: Aide, Lt General, Regular
- -3: Aide, Major General, Regular
- -4: Aide, Brig General, Regular
- -5: Aide, General, Subdued
- -6: Aide, Lt General, Subdued
- -7: Aide, Major General, Subdued
- -8: Aide, Brig General, Subdued

MATERIAL:
- -1, -2, -3, -4: Gilding Metal
- -5, -6, -7, -8: Red brass or zinc aluminum

DIMENSIONS:
- HEIGHT (Overall): 1-1/4 inch (3.18 cm) (REF)
- WIDTH (Overall): 13/16 inch (2.06 cm) (REF)
- THICKNESS (Thickest point of shield): .085 inch ± .005 inch (0.215 cm ± 0.012 cm)

FINISH:
- -1, -2, -3, -4:
  - EAGLE (Front and edges): Gold plated, bright finish
  - SHIELD: Hard enameled, nickel plated, mirror-like polished
- -5, -6, -7, -8: Dull flat black enamel

NOTES:
1. Enamel areas for dash no. 1 thru 4 shall be as indicated. The enamel colors shall match the TIOH color chip numbers listed below or the standard sample.

COLOR	CHIP NO.
Blue	18
Red	1

2. All insignia are identical except for the location and number of stars on the chief of the shield.
3. Attaching device shall be prong and clutch type. The prongs shall be located on the vertical centerline, equidistant from each end and 7/8 inch ± 1/64 inch (2.22 cm ± 0.04 cm) apart.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer.
5. The enamel for dash no. 5, 6, 7 and 8 shall match chip no. 37038 of FED-STD 595.
6. Pierced areas shall be as indicated.
7. Shield for dash no. 1, 2, 3 and 4 may be rhodium plated mirror-like polished at the option of manufacturer.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0540)

User activity:
Army - SM

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:16Z
Check the source to verify that this is the current version before use.