NOT MEASUREMENT SENSITIVE

MIL-I-3575/14C
15 February 1990
SUPERSEDING
MIL-I-3575/14B
18 NOVEMBER 1981

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, CHAPLAIN, JEWISH FAITH, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

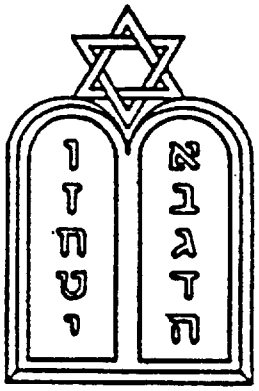

Dash no.:
-1: Regular
-2: Subdued

MATERIAL:
-1: Red brass or nickel silver
-2: Red brass or zinc alumunum

DIMENSIONS:
HEIGHT (Overall): 1 inch (2.54 cm) (REF)
THICKNESS (At thickest point): .070 inch + .010 inch -.000 (0.177 cm) + (0.025 cm) -.000

FINISH:
-1: Nickel plated (Red brass only), silver plated, oxidized with polished highlights, reverse and edges clean.
-2: Dull flat black enamel

NOTES:
1. Attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm) ± (0.04 cm) apart.
2. The enamel for dash no. 2 shall match chip no. 37038 of FED-STD 595.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

Project no. 8455-0447

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:17Z
Check the source to verify that this is the current version before use.