NOT MEASUREMENT SENSITIVE

MIL-I-3575/16E
14 August 1992
SUPERSEDING
MIL-I-3575/16D
18 September 1991

MILITARY SPECIFICATION SHEET

INSIGNIA, OFFICERS, "U.S.", ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

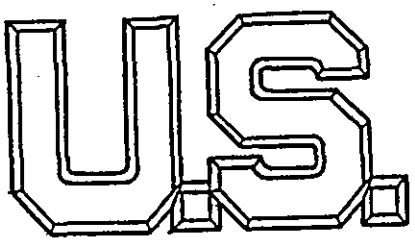

MATERIAL:
-1, -3: Red Brass
-2: Red Brass or Nickel Silver

DASH NO:
-1: Army, Regular
-2: Air Force, Regular
-3: Subdued

FINISH:
-1: Gold Plated, Mirror-like Polished
-2: Nickel Plated, Mirror-like Polished
-3: Dull Flat Black Enamel

DIMENSIONS:
HEIGHT (Overall): 7/16 inch (1.11 cm) (REF)
THICKNESS (At Thickest Point): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:18Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 5/8 inch ± 1/64 inch (1.59 cm ± 0.04 cm) apart.

3. The enamel for Dash No. 3 shall match FED-STD-595 Chip No. 37038.

4. Insignia for Dash No. 1 may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH
Air Force - 11

Review activities:
DLA - CT
Air Force - 82, 99

User activities:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:18Z
Check the source to verify that this is the current version before use.