NOT MEASUREMENT SENSITIVE


MIL-I-3575/18F
14 September 1990
SUPERSEDING
MIL-I-3575/18E
15 February 1990

MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, GENERAL STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

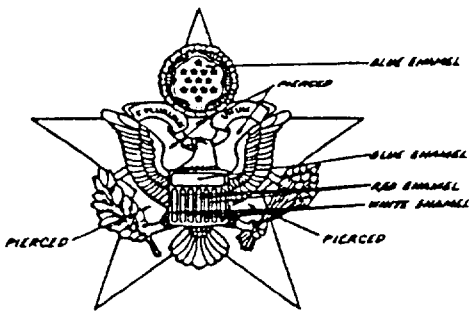

DASH NO:
-1: Regular
-2: Subdued

MATERIAL:
-1: STAR: Red brass
DEVICE (Coat of arms): Gilding metal
-2: Red brass or zinc aluminum

DIMENSIONS:
STAR:
CIRCUMSCRIBED DIAMETER: 1 inch (2.54 cm) (REF)
THICKNESS: .050 inch + .010 inch -.0 (0.127 cm + 0.025 cm - .0)
DEVICE:
HEIGHT: 5/8 inch (1.59 cm)
THICKNESS (At thickest point): .060 inch ± .005 inch (0.152 cm ± 0.012 cm)

FINISH:
-1: STAR: Nickel plated, mirror-like polished finish
COAT OF ARMS: Hard enameled, gold plated, matte finish with polished highlights.
-2: Dull flat black enamel

NOTES:
1. The device shall be superimposed and secured to the star by two rivets or soft solder. When rivets are used, they shall be solid and be fabricated from any type brass. The rivets shall be soldered to the horizontal center line of the device. The device shall be located on the insignia as shown.
2. The enameled areas for dash no.1 shall be as indicated. The enamel colors shall match the TIOH color chips listed below or the standard sample.

COLOR	CHIP NO.
Red	1
White	28
Blue	20

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:18Z
Check the source to verify that this is the current version before use.

3. The attaching device shall be prong and clutch type. Prongs shall be located on the vertical center line of the star, equidistant from each end and 1/2 inch ± 1/64 inch (1.27 cm) ± (0.04 cm) apart.
4. Pierced areas of the device shall be as shown.
5. The enamel for dash no. 2 shall match chip no. 37038 of FED-STD 595.
6. Star may be rhodium plated mirror-like polished at option of manufacturer.

Custodian:
Army-IH

Preparing Activity:
Army-IH

Review Activity:
DLA-CT

(Project no. 8455-0540)

User Activity:
Army-SM

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:18Z
Check the source to verify that this is the current version before use.