NOT MEASUREMENT SENSITIVE


MIL-I-3575/19C
14 August 1992
SUPERSEDING
MIL-I-3575/19B
15 February 1990


MILITARY SPECIFICATION SHEET

INSIGNIA, BRANCH OF SERVICE, OFFICERS, INFANTRY, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-3575.

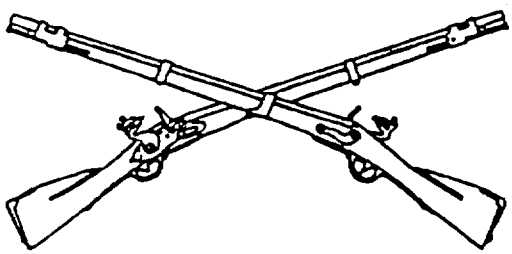

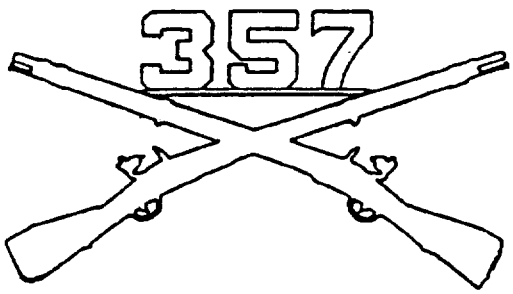

MATERIAL:
-1, -3: Red Brass
-2, -4: Red Brass or Zinc Aluminum

FINISH:
-1, -3: Gold Plated, Mirror-like Polished
-2, -4: Dull Flat Black Enamel

DASH NO:
-1: Regular
-2: Subdued
-3: Regimental, Regular
-4: Regimental, Subdued

DIMENSIONS:
HEIGHT: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Thickest Point): 0.080 inch ± 0.005 inch (0.203 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 1-1/4 inch ± 1/64 inch (3.18 cm ± 0.04 cm) apart.

3. The enamel for Dash No. 2 and 4 shall match FED-STD-595 Chip No. 37038.

4. Number for Regimental branch insignia will be in accordance with TIOH drawing B-2-10.

5. Insignia for Dash No. 1 and 3 may be manufactured using 22 karat gold plate with nickel underplating for commercial sale only.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0682,

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T18:19Z
Check the source to verify that this is the current version before use.